

Panasonic
ideas for life

OVERVIEW

**PROGRAMMABLE LOGIC
CONTROLLERS**



Advantages of PLC control




Powerful hardware solutions

Panasonic PLCs offer an outstanding price-performance ratio which incorporates numerous functions into a very compact body. Even in the smallest size they provide a powerful instruction set which allows the system to handle demanding tasks such as analog control, networking and positioning control.

Innovative programming software

Our PLC programming software was one of the first on the market conforming to the international standard IEC 61131-3. Numerous libraries that incorporate a lot of our know-how ensure the reusability of ready-made functions and function blocks and save time for programming and debugging.

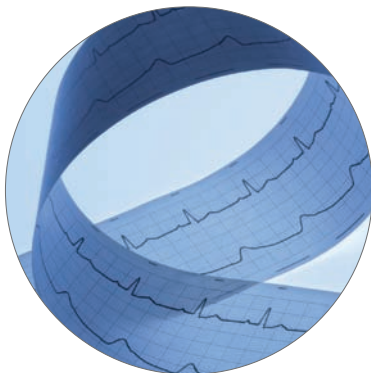

Long-life quality

As with all Panasonic products, the PLCs undergo extremely rigorous testing during development that far exceeds the demands that will actually be placed on them. This is a guarantee for the long life of the product in the application.




Benefit from good service




In addition to a comprehensive PLC range, Panasonic also offers the high-quality care demanded from a service-oriented company certified according to ISO 9001. Highly trained application engineers can provide custom designed systems. The sales staff regularly participates in hardware and software training courses.



The Panasonic PLC range

Selection of products

Model	FP-e		FP0R			FPΣ (Sigma)			
									
Features	PLC + Display + Switch All-in-one controller with six functions <ul style="list-style-type: none"> Mountable in a 48mm square cut in a panel 14 I/O points (input: 8, output: 6) Can serve as a temperature controller with a thermocouple input Motor control by the built-in pulse output Heater control by the PWM output Serial communications by the RS232C/RS485 port 		Pocket-size ultra-compact controller ideal for use in extremely narrow spaces <ul style="list-style-type: none"> Ultra-high processing speed of 80 nsec/step within range of 0 to 3000 steps Wide selection of program capacity from 16k to 32k steps Wide selection of the number of I/O points from 10 to 128 Up to 24 thermocouple inputs connectable for multipoint temperature control Multi-axis control available without expansion units Battery-less backup of all data 			High performance ultra-compact controller Reliably supports the control of higher speed equipment with more functions featured <ul style="list-style-type: none"> Excellent basic performance, including program capacity of 32k steps, operation speed of 0.32μs/step and 384 I/O points Built-in two-axis 100kHz pulse output capable of interpolation control Positioning units capable of controlling network servomotors Can be equipped with up to three ports for general-purpose serial communication without expansion unit Compatible with PROFIBUS, DeviceNet, CANopen and other open field networks 			
CPU (control unit) model	Basic type	Thermocouple input type	C10/C14/C16	C32	T32/F32	C24	C28	C32	
Maximum controllable I/O points	14 points	12 points	106 to 112 points	128 points		376 points	380 points	384 points	
Connectable expansion units	N/A		3 units			7 units (right: 3 left: 4)			
Program capacity	2.7k steps		16k steps	32k steps		32k steps			
Comment memory	N/A		A (built-in memory)			A (built-in memory)			
Operation speed	0.9μs/step (basic instructions)		0.08 - 0.58μs/step (basic instructions)			0.32μs/step (basic instructions)			
Data registers	1660 words		12k words	32k words		32,765 words			
Internal relays	1008 points (63 words)		4096 points (256 words)			4096 points (256 words)			
Network compatibility	Ethernet	A (with FP Web-Server 2)		A (with FP Web-Server 2)		A (with FP Web-Server 2)			
	PROFIBUS DP	N/A		Slave		A (master, slave)			
	DeviceNet	N/A		N/A		A (master, slave)			
	CANopen	N/A		N/A		A (master, slave)			
	PROFINET IO	N/A		N/A		A (slave)			
	Modbus-RTU	A (RS485 type) slave		A (RS232C)		A (RS485 and RS232C communication cassette)			
	CC-Link	N/A		A (slave, CC-Link unit)		A (slave, CC-Link unit)			
	Computer link (MEWTOCOL)	A (Tool port, COM port)		A (Tool port, COM port)		A (Tool port, communication cassette)			
	General-purpose serial (nonprocedural)	A (COM port)		A (Tool port, COM port)		A (Tool port, communication cassette)			
	PLC Link	W	N/A		N/A		N/A		
		W0	N/A		A		A (RS485 communication cassette)		
		W2	N/A		N/A		N/A		
		VE	N/A		N/A		N/A		
Remote I/O (MEWNET-F)	N/A		A (64-point slave stations, I/O link unit)		A (64-point slave stations, I/O link unit)				
S-LINK	N/A		A (FP0-SL1 control unit)		A (S-LINK unit)				
Motor control	Built-in pulse output	2 axes/10kHz	2 axes/5kHz	4 axes/50kHz (C16,C32,T32, F32)		2 axes/100kHz (transistor output type)			
	Positioning unit	N/A		N/A		2-axis/4-axis type unit, up to 16 axes			
	PWM output	2 points/1kHz/1000 resolution		4 points/6kHz to 4.8kHz (C16, C32, T32, F32)		2 points/12kHz/1000 resolution (transistor output type)			
	High-speed counter	4 ch/10kHz	4 ch/5kHz	single phase: 6ch/50kHz; 2-phase: 3ch/15kHz		4 ch/50kHz			
Analog measurement	Voltage/current input	N/A		8 ch/unit	2-ch input and 1-ch output mixed unit		8 ch/unit	2-ch input and 1-ch output mixed unit	
	Voltage/current output	N/A		4 ch/unit			4 ch/unit		
	Temperature input	N/A	2 ch (thermocouple)	8 ch thermocouple unit, 6 ch RTD unit		8 ch thermocouple unit, 6 ch RTD unit			
Calendar timer (clock function)	A (calendar timer type)		A (T32 only)		A				


Model	FP-X			FP2			FP2SH			
										
Features	<p>High performance compact terminal-block type controller</p> <p>Wide selection of add-on cassettes allows space-saving use of the controller for a variety of purposes</p> <ul style="list-style-type: none"> Up to three add-on cassettes can be attached to the top of the control unit. The unit is of the terminal block type, but is space-saving and allows a variety of applications Ethernet cassette available for data collection Built-in four-axis pulse output. Two axes for linear interpolation Comment memory for simple maintenance work USB port for direct connection to a PC 			<p>Standard of the compact medium-scale class</p> <p>Loaded with positioning and networking functions controller for a variety of purposes</p> <ul style="list-style-type: none"> Compact body of 140 x 100mm (WxH) (five modules) Wide selection of positioning units RTEX: Compatible with wire-saving network servomotors Multifunction type: Super-quick startup in 0.005ms Interpolation type (to be released): Three-axis helical interpolation, two-axis synchronization Compatible with Ethernet, CANopen, PROFIBUS, DeviceNet, CC-Link and various other open field networks 			<p>Scan time: 1ms/20k steps</p> <p>Advanced version of FP2 capable of ultra-high speed processing</p> <ul style="list-style-type: none"> Ultra-high speed model that shares units with FP2, ideal for high-speed control of electronic device manufacturing equipment High program capacity of 120k steps 60k step type also available Compatible with Small PC Cards, which serve as a program backup or extended memory for processing a large volume of data 8192 I/O points max. (remote I/O system) 			
CPU (control unit) model	C14	C30	C60	C1	C1D	C1SL	C2	C2P	C3P	
Maximum controllable I/O points	336 points	352 points	382 points	2048 points			2048 points (8192 points with remote I/O system)			
Connectable expansion units	8 units + add-on cassettes (up to 3)			32 units (when the H type backplane is used)			32 units (when the H type backplane is used)			
Program capacity	16k steps	32k steps		16k steps (32k steps with expansion memory)			60k/120k steps			
Comment memory	A (built-in memory)			A (optional memory)			A (built-in memory)			
Operation speed	0.32µs/step (basic instructions)			0.35µs/step (basic instructions)			0.03µs/step (basic instructions)			
Data registers	12,285 words	32,765 words		6000 words (Exc. file register. See the end of this table.)			10,240 words (Exc. file register. See the end of this table.)			
Internal relays	4096 points (256 words)			4048 points			14,192 points			
Network compatibility	Ethernet	A (Ethernet communication cassette, FP Web-Server 2)		A (ET-LAN unit)			A (ET-LAN unit)			
	PROFIBUS DP	A (slave, FP0 DP-S unit)		A (slave, master)			A (master, slave)			
	DeviceNet	N/A		A (slave, master)			A (master, slave)			
	CANopen	N/A		A (slave, master)			A (master, slave)			
	PROFINET IO	N/A		A (slave)			A (slave)			
	Modbus-RTU	A (RS485 communication cassette)		N/A			N/A			
	CC-Link	A (slave, FP0 CC-Link unit)		N/A			N/A			
	Computer link (MEWTOCOL)	A (Tool port, communication cassette)		A (COM port, CCU, MCU)			A (COM port, CCU, MCU)			
	General-purpose serial (nonprocedural)	A (Tool port, communication cassette)		A (COM port, SDU, MCU)			A (COM port, SDU, MCU)			
	PLC Link	W	N/A		A (MW link unit)			A (MW link unit)		
		W0	A (RS485 communication cassette)		A (MCU)			A (MCU)		
		W2	N/A		A (MW link unit)			N/A		
		VE	N/A		N/A			A (VE link unit)		
Remote I/O (MEWNET-F)	A (64-point slave stations, FP0 I/O link unit)		A (Master: MW link unit) (Slave: RMS unit)			A (Master: MW link unit) (Slave: RMS unit)				
S-LINK	N/A		A (FP2-C1SL, S-LINK unit)			A (S-LINK unit)				
Motor control	Built-in pulse output	2 axes/100kHz + 2 axes/20kHz (transistor output type)		N/A			N/A			
	Positioning unit	1 axis/100kHz (pulse I/O add-on cassette)		RTEX, multifunction type, interpolation type			RTEX, multifunction type, interpolation type			
	PWM output	4 points/12kHz/1000 resolution (transistor output type)		4 points/30kHz/100 resolution (Pulse I/O unit)			4 points/30kHz/100 resolution (Pulse I/O unit)			
	High-speed counter	8 ch/50kHz		4 points/200kHz (FP2-HSCT, FP2-PXYT)			4 points/200kHz (FP2-HSCT, FP2-PXYT)			
Analog measurement	Voltage/current input	2 ch/cassette	2-ch input and 1-ch output mixed cassette	8 ch (FP2-AD8V1, FP2-AD8X)			8 ch (FP2-AD8V1, FP2-AD8X)			
	Voltage/current output	2 ch/cassette		4 ch (FP2-DA4)			4 ch (FP2-DA4)			
	Temperature input	2 ch thermocouple/RTD input cassette		8 ch thermocouple/RTD (FP2-AD8X, FP2-RTD)			8 ch thermocouple/RTD (FP2-AD8X, FP2-RTD)			
Calendar timer (clock function)	A (MRTC cassette)		A (optional memory EM1, EM2, EM3)			A (built-in type)				
Others	With a USB port (C30/C60)		File register (0 to 14,333 words)			File register (32,765 words, 3 banks)				

N/A: Not available

A: Available

The Panasonic PLC range

Compatible network diagram

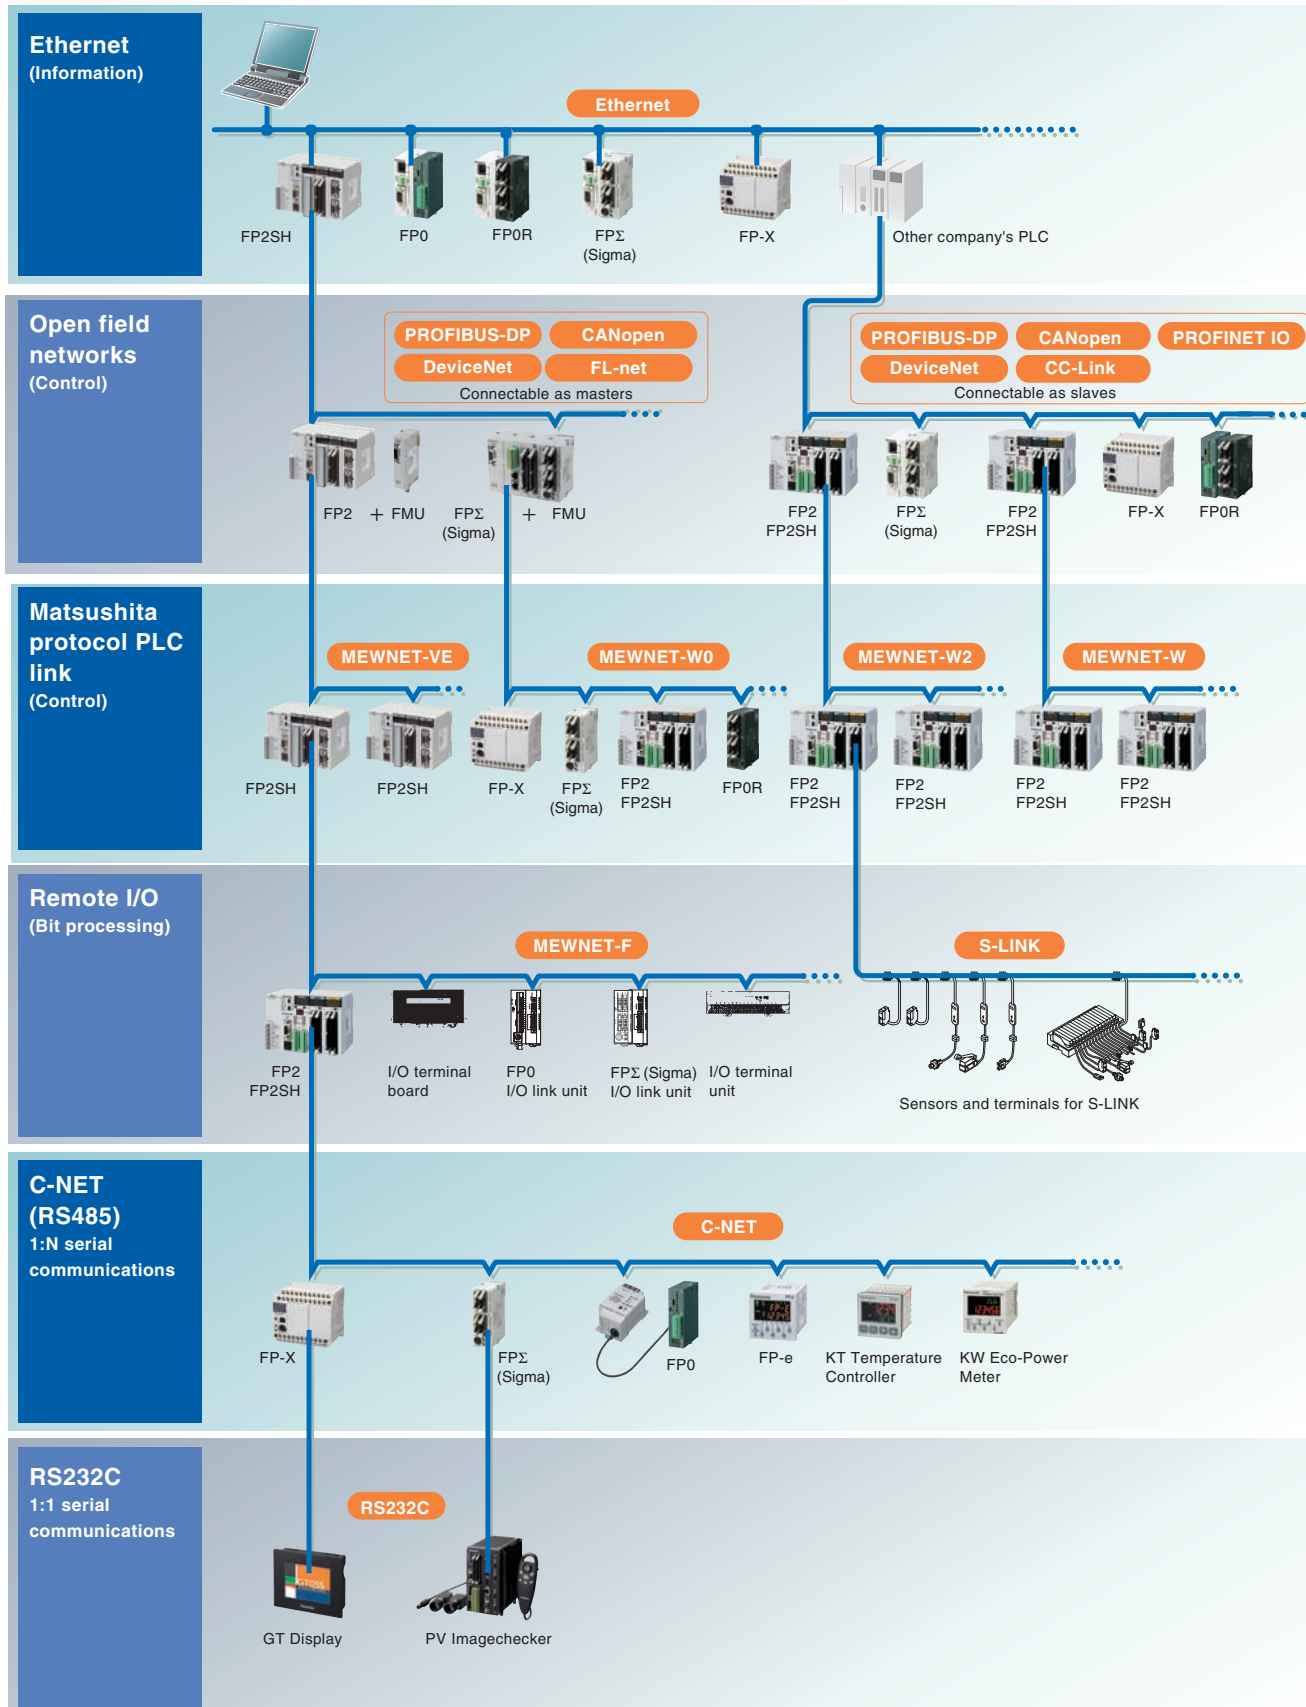

Compatible network table

Network	Applications and features	Transmission cable	Transmission speed	Transmission distance	Supported function				Compatible PLCs					
					PLC Links	Master/ Slave	Remote I/O systems	Computer link	FP2SH	FP2	FP-X	FPΣ (Sigma)	FP0	FP-e
Ethernet	<ul style="list-style-type: none"> Connection to PCs or workstations by a standard LAN, Ethernet For data collection and operation control 	UTP cable or transceiver cable	10Mbit/s/100Mbit/s	Max segment: 500m Max. distance between nodes: 2500m	A	A	N/A	N/A	A	A	A	A	A	A
Open networks	CC-Link	CC-Link dedicated cable (twisted pair cable)	10Mbit/s (100m) 5Mbit/s (160m) 2.5Mbit/s (400m) 625kbit/s (900m) 156kbit/s (1200m)		N/A	A	A	N/A	N/A	N/A	A	A	A	N/A
	PROFIBUS-DP	Type A cable for PROFIBUS-DP (twisted pair cable)	12Mbit/s	12km when using a repeater	N/A	A	A	N/A	A (master/slave)	N/A	A (master/slave)	A (slave)	N/A	N/A
	DeviceNet	Dedicated 4-wire shielded cable (Thick/Thin)	500kbit/s (100m) 250kbit/s (250m) 125kbit/s (500m)		N/A	A	N/A	N/A	A (master/slave)	N/A	A (master/slave)	N/A	N/A	N/A
	CANopen	Twisted-pair shielded cable Also compatible with four-wire power bus cables	1Mbit/s (25m) to 10kbit/s (500m)		N/A	A	N/A	N/A	A (master/slave)	N/A	A (master/slave)	N/A	N/A	N/A
	Profinet IO	Standard PROFINET Ethernet cable with standard RJ45 connector	Full duplex, 100Mbit/s		N/A	A	N/A	N/A	A (device)	N/A	A (device)	N/A	N/A	N/A
PLC links	MEWNET-VE	UTP-cable or transceiver cable	10Mbit/s	Max segment: 500m Max. distance between nodes: 2500m	A	N/A	N/A	N/A	A	N/A	N/A	N/A	N/A	N/A
	MEWNET-W0	Twisted-pair cable	115 kbit/s	1200 m	A	N/A	N/A	N/A	A	A	A	A	N/A	N/A
	MEWNET-W2	Twisted-pair cable	500kbit/s (800m) 250kbit/s (1200m)		A	N/A	N/A	N/A	A	A	N/A	N/A	N/A	N/A
	MEWNET-W	Twisted-pair cable	500kbit/s	800m	A	N/A	N/A	N/A	A	A	N/A	N/A	N/A	N/A
Remote I/O systems	MEWNET-F	VCTF or twisted-pair cable	500kbit/s	VCTF 400m twisted-pair cable 700m	N/A	N/A	A	N/A	A	A	A	A	A	N/A
	S-LINK	Dedicated 4-wire flat cable or cable-tyre cable	28.5kbit/s	200m (400m when using a booster)	N/A	N/A	A	N/A	A	A	N/A	A	A	N/A
Serial communications	C-NET (RS485)	VCTF or twisted-pair cable	19,200bp/9600bit/s	1200m	N/A	A	N/A	A	A	A	A	A	A	A
	CCU (RS232C)	RS232C	19,200bp/9600bit/s	15m	N/A	A	N/A	A	A	A	A	A	A	A
	Modem (phone line)	RS232C and phone line	2400kbit/s	To the modem: 3 to 15m	N/A	A	N/A	A	A	A	A	A	A	A

N/A: Not available

A: Available

Timer, counter, hour meter, temperature controller & PLC in one unit

Features


- 5-character, 2-line, 3-color display
- Front operation switch
- Equivalent to FP0-C14 intelligence of small PLCs
- Easy programming using wizard
- Smooth debug
- Panel mounted type



Display modes and functions

N mode


(Normal mode)



Displays any characters and numerical values, and numerical data can be changed.

S mode


(Switch mode)



Can also display characters and numerical values. Operation switches can be used for input.

R mode


(Register mode)



Operation memory in the controller can be monitored and its data can be changed.

I mode

(I/O monitor mode)



I/O status (X, Y) in the controller can be displayed.

Specifications

Performance specifications					
Model	AFPE224300 Basic type (RS232C)	AFPE224302 Basic type (RS485)	AFPE224305 Calendar timer type (RS232C)	AFPE214325 Thermocouple input type (RS232C)	AFPE214322 Thermocouple input type (RS485)
Number of I/O points	Control unit	14 points [Input: 8, Output: 6 (Tr. NPN: 5/Ry: 1)]		12 points [Input: 6, Output: 6 (Tr. NPN: 5/Ry: 1)]	
	Front switch input	8 points			
Program memory	Built-in EEPROM				
Program capacity	2720 steps				
Processing speed	0.9μs/step (for basic instruction)				
Clock/calendar function	-	-	Available (year, month, day, hour, minute, second and day of week). However, this can only be used when a battery has been installed.	-	-
Battery life	-	-	220 days or more (actual usage value: approx. 870 days (25°C) (Periodic replacement interval: 1 year) (Value applies when no power is supplied at all.))	-	-
Pulse catch input/Interrupt input	6 points in total (X0 and X1: 50 μs, X2 to X5: 100 μs)				
COM port note	RS232C	RS485	RS232C	RS232C	RS485
Periodical interrupt	0.5ms to 30s				
Special functions	High speed counter	Counter mode: Addition/subtraction (1-phase) - input points: 4ch (max.)			
	Pulse output	Output points	2 independent points (Y0 and Y1) (No interpolation function)		
		Output frequency	40Hz to 10kHz (Y0/Y1: 1-point)	40Hz to 5kHz (Y0/Y1: 2-points)	40Hz to 5kHz (1-point) 40Hz to 2.5kHz (2-points)
	PWM output	Output points	2 points (Y0 and Y1)		
Output frequency		Frequency: 0.15Hz to 1kHz Duty: 0.1% to 99.9%			


Optimized for a wide range of applications

Equipped with RS485 and RS232C interfaces


Up to 99 computer link stations possible with RS485 (RS485 type)

Up to 32 computer link stations are possible using a C-NET adaptor and up to 99 are possible using a commercially available adaptor. You can easily monitor operation status or perform control.

COMPUTER LINK

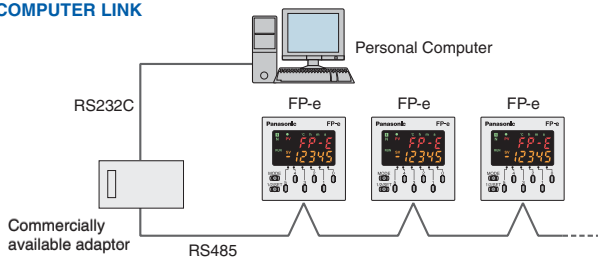


With RS232C, communication possible with up to two ports (RS232C type)

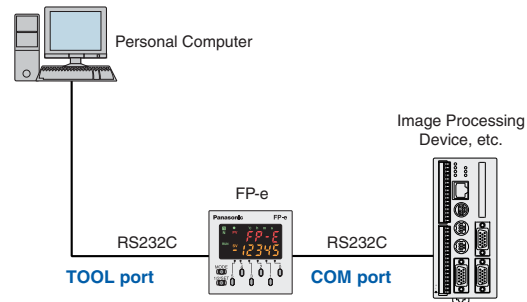

Can even handle temperature control


Two-point K-type thermocouple (-30 to 300°C) connection possible (equipped with thermocouple input)

Can be used in place of a temperature controller or used to control them.

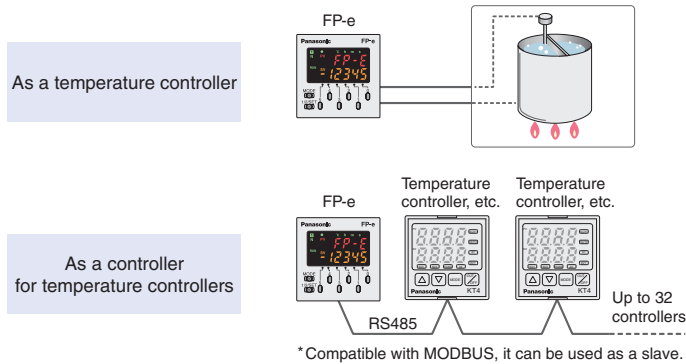

PID instruction function


High-performance temperature control can be achieved with PID instruction.

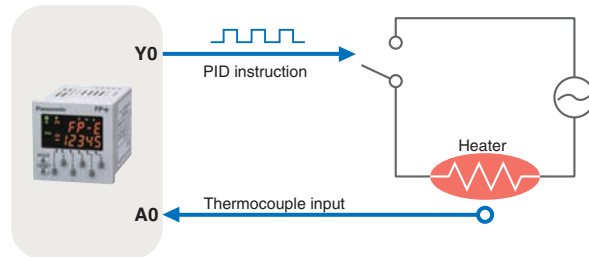

Equipped with high-speed counter for support of 2-axis independent positioning


Pulse output function

The unit comes equipped with 2 channels for pulse output of up to 10kHz pulses. Since these two channels can be separately controlled, the FP-e is also suitable for 2-axis independent positioning.


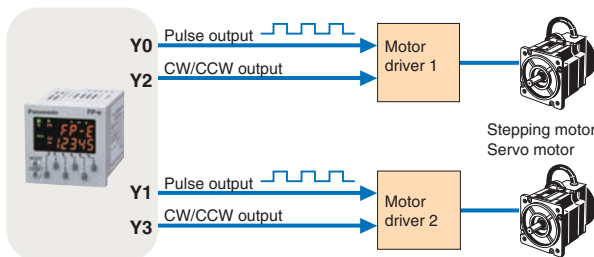


High-speed counter function

In single phase, the 4-channel total is 10kHz, and in 2-phase the 2-channel total is 2kHz total speed, making the FP-e suitable for inverter control, etc. (One half for the type with thermocouple input.)

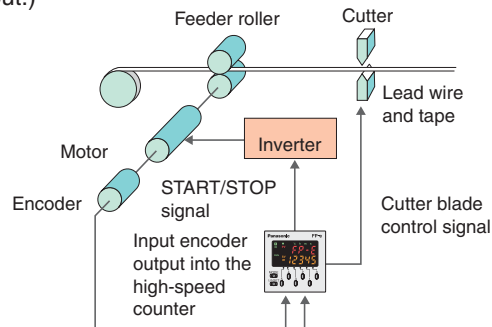

FP0R series



FP0R series: The new standard of ultra-compact PLCs

Features

- Measures only 25 x 90 x 60mm (WxHxD)
Industry's smallest class ideal for installation in equipment and size reduction of control panels.
The 32-point type control unit is 30mm wide.
- Expandable to 128 I/O points by adding up to 3 units
The stacking connector allows a base-less expansion. Even when three expansion units of FP0R series are added to the control unit, the total width is as small as 105mm.
- A wide variety of analog converter units ideal for measurement or temperature control
The lineup includes an 8-ch A/D converter unit, mixed 3-ch D/A converter unit, 4-ch and 8-ch type thermocouple units. 6-ch RTD. Control of up to 24 ch of analog data is possible.



Specifications (FP0R control units)

Product type		C10 series (Relay output type only)	C14 series (Relay output type only)	C16 series (Transistor output type only)	C32 series (Transistor output type only)	T32 series (Transistor output type only)	F32 series (Transistor output type only)	
Programming/Control method		Relay symbol / Cyclic operation						
Number of I/O points	No expansion (control unit only)	10 points [Input: 6, relay output: 4]	14 points [Input: 8, relay output: 6]	16 points [Input: 8, transistor output: 8]	32 points [Input: 16, transistor output: 16]	32 points [Input: 16, transistor output: 16]		
	W/expansion 1 (Same type of control and expansion units)	Max. 58 points	Max. 62 points	Max. 112 points	Max. 128 points	Max. 128 points		
	W/expansion 2 (Mix type of relay and transistor units)	Max. 106 points	Max. 110 points	Max. 112 points	Max. 128 points	Max. 128 points		
Program memory		EEPROM (no back-up battery required)						
Program capacity		16k steps			32k steps			
Operation memory points	Internal relays (R)	4096 points						
	Timers/Counters (T/C)	1024 points						
	Data registers (DT)	12,315 words			32,765 words			
	Index registers (IX, IY)	14 words (IO to ID)						
Master control relay points (MCR)		256 words						
Number of labels (JMP and LOOP)		256 labels						
Differential points		Equivalent to the program capacity						
Number of step ladder		1000 stages						
Number of subroutines		500 subroutines						
Special functions	High speed counter	Single-phase: 6 points (50kHz max. each) 2-phase: 3 channels (15 kHz max. each)*						
	Pulse output	4 points (50kHz max. each) Two channels can be controlled individually.*						
	PWM output	4 points (6 Hz to 4.8 kHz)						
	Pulse catch input/interrupt input	Total 8 points (with high-speed counter)						
	Interrupt program	Input: 8 programs (6 programs for C10 only) / Periodic: 1 program / Pulse match: 4 programs						
	Periodical interrupt	In units of 0.5ms: 0.5ms to 1.5s / In units of 10ms: 10ms to 30s						
	Constant scan	In units of 0.5ms: 0.5 msec to 600ms						
RS232C port		One RS232C port is mounted on each of C10CRS, C10CRM, C14CRS, C14CRM, C16CT, C16CP, C32CT, C32CP, T32CT, T32CP, F32CT and F32CP type (3P terminal block) Transmission speed (Baud rate): 2400 to 115,200 bits/s, Transmission distance: 15 m 9.843 ft. Communication method: half duplex						
Maintenance	Program and system registers	Stored program and system register in EEPROM						
	Operation memory	Stored fixed area in EEPROM, Counter: 16 points, Internal relays: 128 points, Data registers: 315 words				Backup of the entire area by a built-in secondary battery	Backup of the entire area by FRAM (without the need for a battery)	
	Self-diagnostic function	Watchdog timer (Approx. 690ms), program syntax check						
	Real-time clock function	-				Available		-
	Other functions	Rewriting in RUN mode, download in RUN mode (incl. comments) 8-character password setting, and program upload protection						
Rated operating voltage		24VDC						
Operating voltage range		20.4 to 28.8VDC						
Ambient temperature		0°C to +55°C						

1) * For the limitations while operating units, see the manual.

FP0R series control units

A wide variety of both single and combined units

Control units

Relay output type

Transistor output type

10 points		14 points		16 points		32 points		32 points (T-type)		32 points (F-type)	
Input	Output	Input	Output	Input	Output	Input	Output	Input	Output	Input	Output
6 points	4 points	8 points	6 points	8 points	8 points	16 points	16 points	16 points	16 points	16 points	16 points
AFP0RC10RS AFP0RC10CRS with 2nd RS232C		AFP0RC14RS, AFP0RC14CRS with 2nd RS232C		AFP0RC16P (PNP), AFP0RC16T (NPN) AFP0RC16CP (PNP), AFP0RC16CT (NPN) with 2nd RS232C		AFP0RC32P (PNP), AFP0RC32TC (NPN) AFP0RC32CP (PNP), AFP0RC32CT (NPN) with 2nd RS232C		AFP0RT32CP (PNP), AFP0RT32CT (NPN) with 2nd RS232C		AFP0RF32CP (PNP) AFP0RF32CT (NPN) with 2nd RS232C	

FP Memory Loader

AFP8670

- Read or write programs (up to 60k steps) from or to a PLC
- Personal computer is not required
- Applicable with FP0, FP0R, FP-e, FPΣ (Sigma), FP-X, FP2 and FP2SH



S-LINK MASTER CPU


FP0-SL1

- Control of 64 input and 64 output points is possible with one unit
- Simple connection of S-LINK I/O devices
- Sensors can be easily connected with plug-in connections



Up to three expansion units can be directly connected without connection cables

The expansion unit can be attached easily without any cables to the control unit. Special expansion cables, backplanes, and so forth, are unnecessary as the expansion unit employs a stacking system that uses expansion connectors and lock levers on the surface of the unit itself.

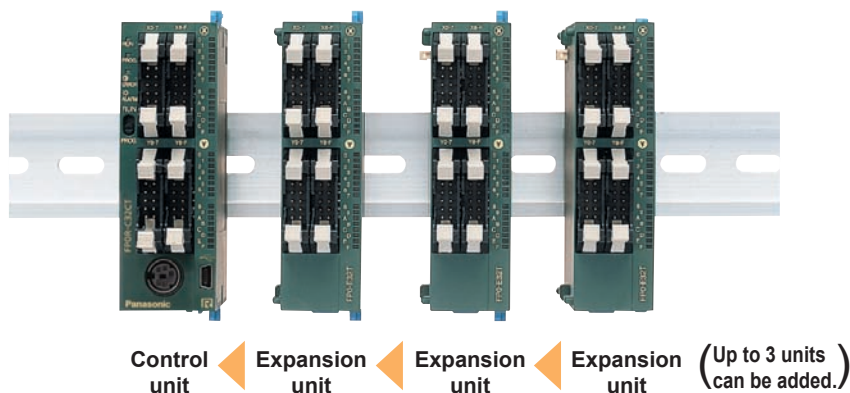

FP0R series expansion units

A maximum of 3 expansion units can be added to the control unit

Digital I/O units

Relay output type

Input only type

Transistor output type



8 points		16 points		32 points		8 points		16 points		16 points		32 points		
Input 4 points	Output 4 points	Input 8 points	Output 8 points	Input 16 points	Output 16 points	Input 8 points	Input 16 points	Output 8 points	Input 8 points	Output 8 points	Output 16 points	Input 16 points	Output 16 points	
FP0-E8RS		FP0-E16RS		FP0-E32RS		FP0-E8X	FP0-E16X	FP0-E8YP (PNP) FP0-E8YT (NPN)	FP0-E16P (PNP) FP0-E16T (NPN)		FP0-E16YP (PNP) FP0-E16YT (NPN)		FP0-E32P (PNP) FP0-E32T (NPN)	
Option														
Output 8 points														
FP0-E8YRS														

Analog I/O units

Temperature control units




3 points		4 points		4 points		8 points		4 points		8 points		6 points	
Input 2 points	Output 1 point	Output 4 points		Output 4 points		Input 8 points		Input 4 points		Input 8 points		Input 6 points	
FP0-A21		FP0-A04I		FP0-A04V		FP0-A80		FP0-TC4		FP0-TC8		FP0-RTD6	

- Input (12 bit):
± 10V, 0 – 5V,
0 – 20mA
- Output (12 bit):
± 10V, 0 – 20mA

- K, J, T, R type thermocouples can be used
- Resolution: 0.1°C
- Accuracy: 0.8°C (R type: 3°C)
- Temperature range:
-100 to 1500°C

- Pt100, Pt1000,
Ni1000
- Temperature range:
-200 to 500°C

Networking units

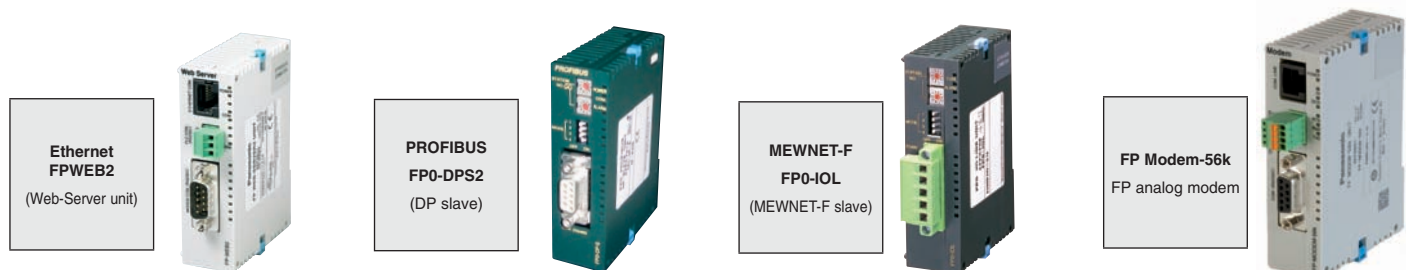

**Ethernet
FPWEB2**
(Web-Server unit)

**PROFIBUS
FP0-DPS2**
(DP slave)

**MEWNET-F
FP0-IOL**
(MEWNET-F slave)

FP Modem-56k
FP analog modem

Add-on unit

Switch 6A loads within the network

Switch electrically insulated loads of AC 250V AC reliably using the FP0 Relay Terminal FP0-RT8Y-6 directly within the network.



The FP0-RT8Y-6A unit provides reliable insulation between peripheral equipment and the PLC system, even for large electrical loads. Standardized MIL connectors establish a direct connection to the FP0 unit. Thereby the FP0 can act as decentralized intelligence on site and be placed directly next to the power element of the machine – be it the motor, a protective device, a magnetic valve, etc.

Many more connection products are available, please refer to “Panasonic connection technology for PLC” catalog


Specifications FP0-RT8Y-6A

Item	Description	
Rated operating voltage	24VDC	
Operating voltage range	21.6VDC to 26.4VDC	
Power consumption	Max. 100mA (at 24VDC)	
Over voltage protection	Surge absorber	
Connection method	With spring cotter via flat cable to FP0-C16P/C16CP/C32P/C32CP/T32CP/E8YP/E16YP/E16P/E32P	
Contacts		
Contact type	1 normally open contact	
Contact class	II according to VDE 0435 Section 120	
Connection method	MC connector (for conductor cross-sections up to 2.5mm ²)	
Rated resistive load	250VAC	
Limiting continuous current	6A/output (at max. ambient temperature)	
Startup	„0“ → „1“	Typical 8ms
	„1“ → „0“	Typical 4ms
Limiting continuous current	mechanical	Approx. 5 x 10 ⁶ switching cycles
	electrical	Rated load 6A, 230VAC, 5 x 10 ⁴ switching cycles Motor load 230VAC, surge current 1A, cos φ0.4
General		
Overvoltage category	III	
Pollution degree	RT3	
Ambient temperature	0 – 55°C	

FP0R positioning


Jog positioning control (F171 instruction)

Motion can be started without a preset target value. When a stop signal is input, the target value is set, and the motion is slowed to a stop.

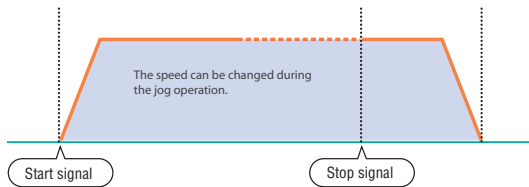

- Useful for**
- Labels: Stopping the motion at a constant distance from the point where a label end detection signal is triggered
 - Processing machines: Stopping the motion at a constant distance from the point where a processing object edge detection signal is triggered, and cut/drill the object


Individual settings for acceleration and deceleration (F171, F172, F174, and F175 instructions)

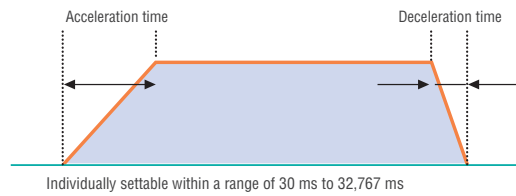

- Useful for**
- Labels: Starting the operation at a relatively low acceleration to prevent tape from breaking
Stopping the operation at high deceleration when detecting the label end to save the tape

Changing the speed (F171 and F172 instructions)


The target speed can be changed by an external signal input during the jog or trapezoidal control operation.

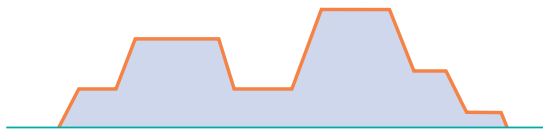

- Useful for**
- Speed synchronization of transfer/processing equipment.

Measuring the pulse frequency (F178 instruction)


Pulses input in a specified period by a single instruction are counted, and the frequency is calculated.

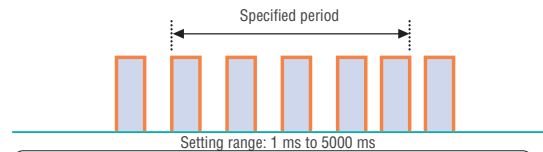


- Useful for**
- Detection of motor rotation speed for encoder feedback control

Built-in 4-axis pulse outputs (Transistor output type)

Multi-axis (4-axis) control is available without expansion units.

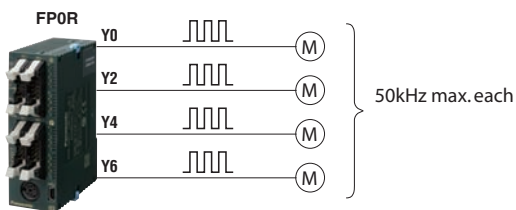


Two sets can simultaneously undergo two-axis linear interpolation (F175 instruction).

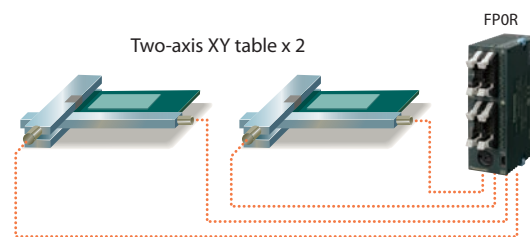


Simultaneously usable high speed counters (6 channels) and pulse outputs (4 channels)

The right-hand figure, the speed of conveyor 1, which is inverter-controlled, is measured based on the encoder pulse count, and pulses are output to the slave motor (for jog operation) according to the measured speed in order to synchronize the speed of conveyor 2.

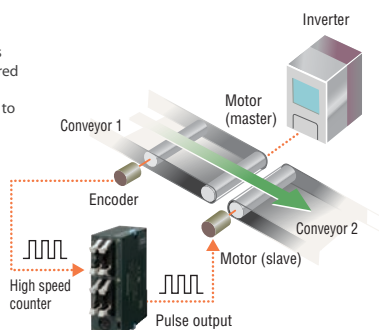


Built-in multipoint PWM outputs (4 channels)

A single FP0R unit can control the speeds of up to six DC motors/fan motors. It also can serve as an analog voltage output unit.

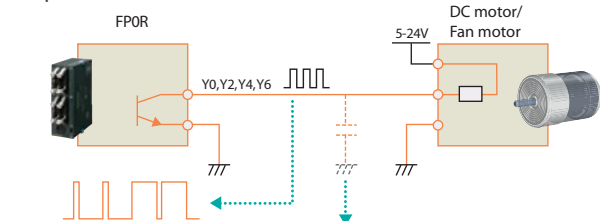

The speed can be controlled by changing the ON width of the PWM output within a range of 0.1% to 99.9%.

The unit can also serve as an analog voltage output unit (resolution: 1/1000) when a smoothing capacitor is inserted in the circuit.

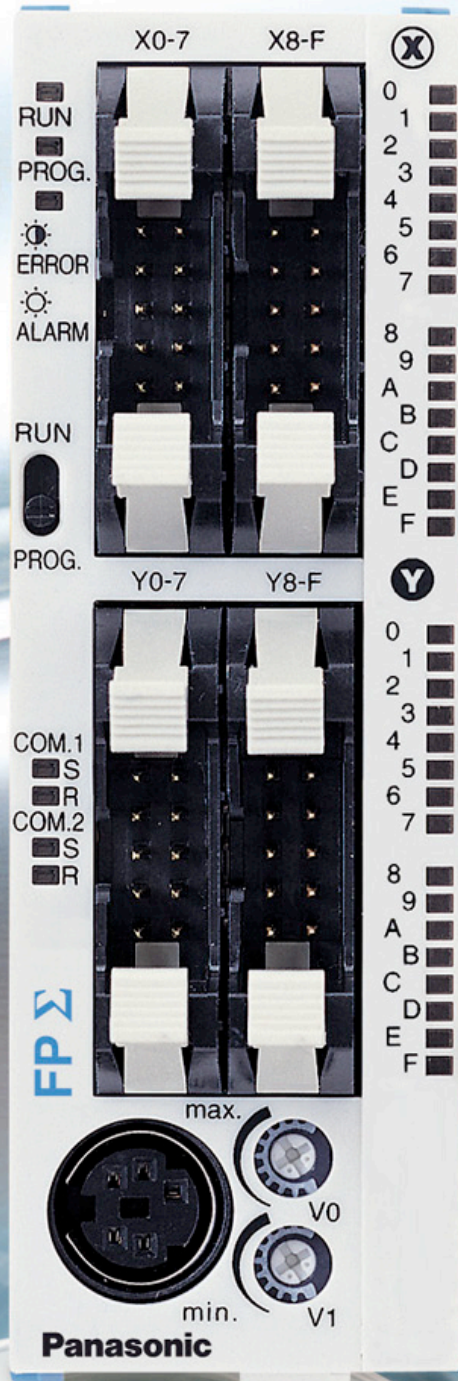

FPΣ (Sigma): The next generation compact PLC

Features

- Abundant program capacity – 32k steps
The 32k step program capacity can accommodate an increase in the number of programs accompanying functionality enhancements, expansions, or changes of equipment.
- Equipped with an independent comment memory
All of 100,000 I/O comments, 5000 lines of line-space comments, and 5000 lines of remark comments are saved in FPΣ (Sigma) together with programs.
- Equipped with a high-speed RISC processor
Equipped with an RISC processor, achieving high-speed processing with a scan time of less than 2ms for 5000 steps.

- High-speed positioning unit
The 4Mbps maximum frequency and startup speed of 0.005ms allow use for linear servo control.
- Simple temperature control
A temperature control program can be written in only one line by using the PID F356 (EZPID) instruction, facilitating temperature control by a PLC, which had previously been considered difficult.



Part number		32k type	FPG-C32T2H-A FPG-C32T2HTM	FPG-C24R2H-A FPG-C24R2HTM	FPG-C28P2H-A FPG-C28P2HTM
Number of I/O points	Control unit		32 points (DC input: 16, NPN output: 16)	24 points (DC input: 16, relay output: 8)	28 points (DC input: 16, PNP output: 12)
	With FP0 expansion units		Max. 128 points (up to 3 units) When using transistor output type expansion units	Max. 120 points (up to 3 units) When using transistor output type expansion units	Max. 124 points (up to 3 units) When using transistor output type expansion units
	With FPΣ (Sigma) expansion units		Max. 288 points (up to 4 units) When using transistor output type expansion units	Max. 280 points (up to 4 units) When using transistor output type expansion units	Max. 284 points (up to 4 units) When using NPN output type expansion units
	With FP0 and FPΣ (Sigma) expansion units		Max. 384 points When using transistor output type expansion units	Max. 376 points When using transistor output type expansion units	Max. 380 points When using NPN output type expansion units
Programming method/ Control method		Relay symbol/cyclic operation			
Program memory		Built-in flash ROM (without backup battery)			
Program capacity		32k steps (32k type)			
Number of instructions	Basic		93		
	High-speed		218	216	218
Operation speed		Basic instruction: 0.32μs/step (32k type)			
Operation memory area	Relay	Internal relays (R)	4096 points (32k type): R0 to R255F		
		Timers/Counters (T/C)	1024 points ^{1) 2)} (for initial setting, timer: 1008 points (T0 to T1007), counter: 16 points (C1008 to C1023) Timer: counts each unit up to 32767 times (units: 1ms, 10ms, 100ms, or 1s). Counter: Counts 1 to 32,767		
		Link relays (L)	2048 points (32k type)		
	Memory area	Data register (DT)	32,765 words (DT0 to DT32764) ¹⁾		
		Link data register (LD)	256 words (32k type)		
		Index register (IX,IY)	14 words (I0 to ID)		
Master Control Relay points (MCR)		256			
Labels (JMP + LOOP)		256			
Differential points		Unlimited			
Number of step ladder		1000 stages			
Number of subroutines		100			
Pulse catch input		8 points (X0 to X7)			
Interrupt program		9 programs (8 external input points (X0 to X7), 1 periodical interrupt point 0.5ms to 30s)			
Self-diagnostic function		E. g. watchdog timer, program syntax check			
Clock/Calendar function		Available (year, month, day, hour, minute, second and day of week); however, this function can only be used when a battery has been installed ³⁾ .			
Potentiometer (Volume) input		2 points, resolution: 10 bits (K0 to K1000)			
Battery life		220 days or more (actual usage value: approx. 840 days (25°C). Suggested replacement interval: 1 year. Value applies when no power at all is supplied.			
Comment storage		All kinds of comments, including I/O comments, remarks and block comments, can be stored (without backup battery).			
Link function		Computer Link (1:1, 1:N) ⁴⁾ General-purpose communication (1:1, 1:N) ^{4) 5)} PLC Link ⁶⁾			
Other functions		Program edition during RUN, constant scan, forced on/off, password, floating-point operation and PID processing			
Linear/Circular interpolation for positioning		Available		Not available	Available

Notes: 1) If no battery is used, only the fixed area is backed up (counters 16 points: C1008 to C1023, internal relays 128 points: R900 to R97F, data registers 55 words: DT32710 to DT32764). When the optional battery is used, data can be backed up. Areas to be held and not held can be specified using the system registers.
2) The number of points can be increased by using an auxiliary timer.
3) Precision of calendar timer: - At 0°C 32°F, less than 119 seconds error per month.
- At 25°C, less than 51 seconds error per month.
- At 55°C, less than 148 seconds error per month.

4) An optional communication cassette (RS232C type) is required in order to use 1:1 communication.
5) An optional communication cassette (RS485 type) is required in order to use 1:N communication.
6) An optional communication cassette (RS485 type) is required. The number of points actually available for use is determined by the hardware configuration.

Control units: Outstanding performance in a compact design

FPΣ – Transistor output type



28 points	
Input 16 points	Output PNP 12 points
MIL connector type FPG-C28P2H-A	



32 points	
Input 16 points	Output NPN 16 points
MIL connector type FPG-C32T2H-A	

FPΣ – Relay output type



24 points	
Input 16 points	Output relay 8 points
Screw terminal type FPG-C24R2H-A	

FPΣ – Transistor output type with thermistor input



28 points	
Input 16 points	Output PNP 12 points
2 thermistor inputs FPG-C28P2HTM	



32 points	
Input 16 points	Output NPN 16 points
2 thermistor inputs FPG-C32T2HTM	

FPΣ – Relay output type with thermistor input



24 points	
Input 16 points	Output relay 8 points
2 thermistor inputs FPG-C24R2HTM	

High expansion capability


FPΣ can use the expansion units of the FP0 on the right-hand side. New FPΣ units can be added to the left hand side.

Max. 4 expansion units
each 64 I/Os = 256 I/Os


...up to 384 I/O!

Control unit
max. 32 I/Os


Max. 3 expansion units
each 32 I/Os = 96 I/Os

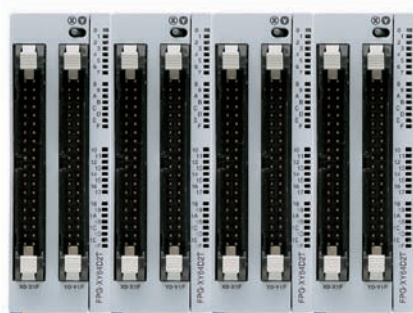

Parallel expansion BUS



Serial expansion BUS



Expansion units: Wide variety - left side

FPΣ
I/O expansion unit



64 points	
Input 32 points	Output (PNP) 32 points
MIL connector type FPG-XY64D2P-A	

FPΣ
I/O expansion unit



64 points	
Input 32 points	Output (NPN) 32 points
MIL connector type FPG-XY64D2T-A	

FPΣ
Memory expansion unit



FPG-EM1
Memory: 256k words
FPG-EM1

FPΣ
Analog unit



8 points	
Input 4 points	Output 4 points
MIL connector type FPGAD44D50 (with 50 →) FPGAD44D250 (with 250 →)	

- Input (16 bit):
0 – 10V, 0 – 20mA
- Output (12 bit):
0 – 10V, ± 10V,
4 – 20mA

FPΣ positioning expansion units RTEX Real-time Ethernet system for Minas A4N servo drives



2-axis
FPG-PN2AN



4-axis
FPG-PN4AN



8-axis
FPG-PN8AN

FPΣ positioning expansion units



1-axis
Transistor output FPG-PP11



1-axis
Line driver output FPG-PP12



2-axis
Transistor output FPG-PP21



2-axis
Line driver output FPG-PP22

Expansion units left side: Network units

FPΣ
PROFIBUS expansion unit



PROFIBUS Master
FPG-DPV1-M

FPΣ
CANopen expansion unit



CANopen Master
FPG-CAN-M

FPΣ
DeviceNet expansion unit



DeviceNet Master
FPG-DEV-M

FPΣ
S-Link expansion unit



S-Link Master
FPG-SL

FPΣ Fieldbus slave expansion units



CC-Link Slave
FPG-CCLS



PROFIBUS Slave
FPG-DVP1-S



DeviceNet Slave
FPG-DEV-S



CANopen Slave
FPG-CAN-S



PROFINET I/O Slave
FPG-PRT-S

Communication cassette



Communication Cassette
FPG-COM1-A: 1 channel RS232C
FPG-COM2-A: 2 channels RS232C
FPG-COM3-A: 1 channel RS485
FPG-COM4-A: 1 channel RS232C
& 1 channel RS485

Other network units



Ethernet
FPWEB2



FP Modem 56k
FP Modem-56k



3channel RS485
AFPG951T34

Analog value processing: Analog units FPGAD44D50 / FPGAD44D250

Features

- Multimode A/D or D/A conversion. Voltage or current can be set separately for each channel
- 4 analog inputs (current input: 50Ω input impedance, AD44D50)
4 analog inputs (current input: 250Ω input impedance, AD44D250)
- standard 0 to 10V or 0 to 20mA
- 4 analog outputs: -10V to +10V, 4 to 20mA
- High resolution: 16-bit input and 12-bit output
- Fast conversion speed: Inputs: 10ms / 4 channels: outputs: 10ms / 4 channels
- MC terminal type connector



Allgemeine Spezifikationen

	Description
Rated voltage	24VDC
Operating voltage	21.6 to 26.4VDC
Current consumption	< 100mA
Ambient temperature	0°C to +55°C
Storage temperature	-20°C to +70°C
Size	90 x 30 x 60mm (W x L x H)
Weight	150g

Analog specification

Article no.	FPGAD44D50	FPGAD44D250	
No. of channels	4 channels/unit	4 channels/unit	
Input range	Voltage:	0 to 10V	
	Current:	0 to 20mA	
Digital value	0 to 10V, 0 to 20mA; K0 to K65535		
Resolution	16-bit (1/65536)		
Conversion speed	Voltage:	10ms / 4 channels	
	Current:		
Accuracy	Voltage:	0.1% over the entire range from 0 to 25°C, 1% over the entire range from 0 to 55°C	
Input impedance	Voltage:	100kΩ	
	Current:	50Ω	250Ω
Max. input range	Voltage:	+15V	
	Current:	+30mA	
Insulation method	Between analog input terminals and FPΣ Circuit: Optocoupler (no isolation between channels)		

Analog output specifications

Article no.	FPGAD44D50	FPGAD44D250	
No. of channels	4 channels/unit	4 channels/unit	
Output range	Voltage:	0 to 10V, -10V to +10V	
	Current:	4 to 20mA	
Digital value	4 to 20mA, 0 to 10V; K0 to K4095		
	-10V to +10V; K-4095 to K4095		
Resolution	12-bit (1/4096) plus sign		
Conversion speed	10ms / 4 channels		
Accuracy	Voltage:	0.1% over the entire range from 0 to 25°C	
	Current:	0.3% over the entire range from 0 to 55°C, 3% at 55°C	
Input impedance	Voltage:	100kΩ	
	Current:	50Ω	250Ω
Max. input range	Voltage:	+/-15mA	
Permissible load resistance	Current: < 300Ω	Voltage: > 1kΩ	
Insulation method	Between analog input terminals and FPΣ Circuit: Optocoupler (no isolation between channels)		

Specially designed for positioning application


Max. 100kHz pulse output performance is now standard.

Powerful device capable of linear interpolation and circular interpolation.

Pulse output max. 100kHz

Because command processing at speeds up to 100kHz is available, high-speed, high-precision positioning is enabled. Along with stepping motor control, the specs also ensure plenty of scope for controlling servo motors.

Possible to combine with pulse-train input drivers. Single unit enables two-axis control.

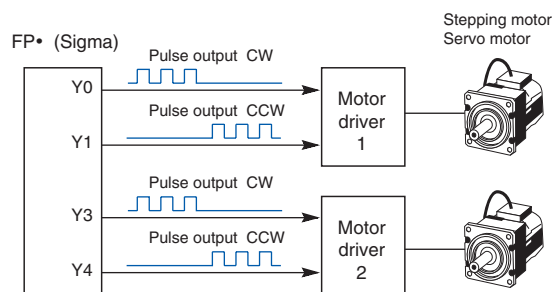


Rapid 0.02ms start (when JOG operation controls are executed)

The time taken to execute the JOG operation, from the instant the trigger (execution condition) goes on to the time of pulse output, is 0.02ms and 0.2ms even with trapezoidal control. Control time is reduced even for machines that quickly and repeatedly restart.

Linear interpolation and circular interpolation are built-in (FPG-C32T2H-A and FPG-C28P2H-A)

Interpolation functions enable simultaneous control of two axes. Applications that a compact PLC couldn't previously cope with are no longer a challenge.

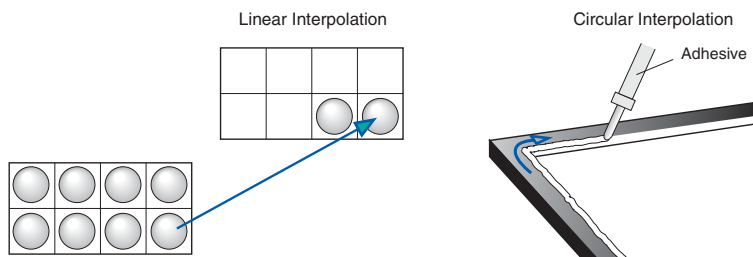


And there's more:

Smooth acceleration/deceleration


You can choose to set either 30 or 60 steps of acceleration/ deceleration. This feature means you can achieve smoother movement during long acceleration/ deceleration periods of stepping motors.

The settings are there for a maximum 60 acceleration/ deceleration steps.



Support for CW/CCW method

Reduce overall costs by designing systems that combine with servo motors and small stepping motors without support for Pulse and Sign method.

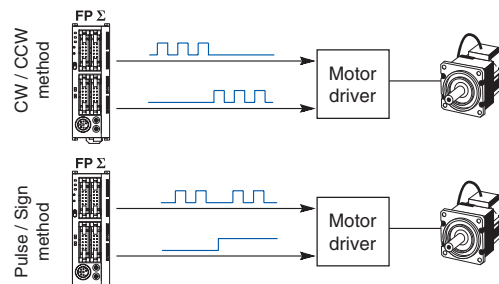

High-speed, high-precision positioning

Programming with convenient and easy-to-understand instructions


- Uses a preset value table for starting speed, target speed, acceleration/deceleration time, and other factors. Easy-to-understand programming is possible since numbers can be specified intuitively.
- Comes with dedicated instructions for each mode: trapezoidal control, home return, JOG operation, free table operation, linear interpolation and circular interpolation.

Selectable home return mode

- The home return method may be specified even in situations such as when only a single sensor is being used, depending on the design.
- When the home position return is completed, a deviation counter clear signal can also be output.

Home position return


- Pulse output diagram (when the home position proximity input is not used).

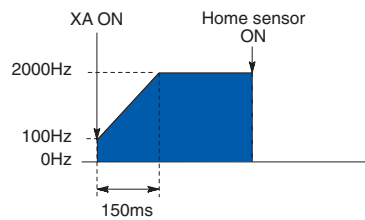

Home search automatically reverses the motor rotation upon Over limit input(+) or Over limit input (-) input and searches for the home position or near home position.

JOG operation


- Pulse output diagram.

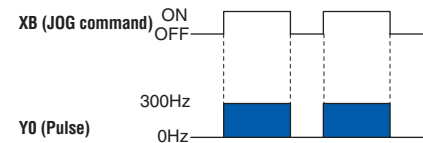

This refers to an operation in which the motor is rotated only while operation commands are being input. This is used to forcibly rotate the motor using input from an external switch, for instance when making adjustments. Depending on the circumstances, unlimited feeding can be accomplished with the JOG operation.

Linear interpolation


- Positioning locus.

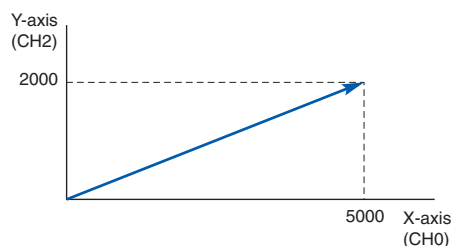

A control function that automatically defines the continuum of points in a straight line based on only two coordinate positions.

Circular interpolation

- Positioning locus.
- Center-radial setting methods are also available.

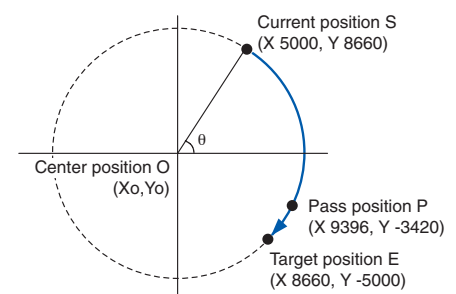

Allows points to be smoothly traversed by arced paths for which the user specifies the orientation plane, the radius of curvature, motion path profile and direction of motion.

Precise positioning

Features

- Fast startup of 0.02 or 0.005ms makes cycle time reduction possible
- Feedback pulse count function makes output pulse counting from external encoders possible
- JOG positioning control supports a wide range of applications
- 4 types of S-curve acceleration/deceleration control makes smooth startup and stopping possible:
Sine curve, quadratic curve, cycloid curve and cubic curve



FPG-PP11



FPG-PP12



FPG-PP21




FPG-PP22


- The FPΣ (Sigma) positioning unit can handle simultaneous startup of multiple axes, enabling simultaneous control of linear interpolation and other elements through user programs
- Transistor output type (open collector) and line driver output type are available

Unit type and product number		
Type	Output type	Part number
1-axis type	Transistor output type	FPG-PP11
2-axis type	Transistor output type	FPG-PP21
1-axis type	Line driver output type	FPG-PP12
2-axis type	Line driver output type	FPG-PP22

Positioning control using a stepping motor

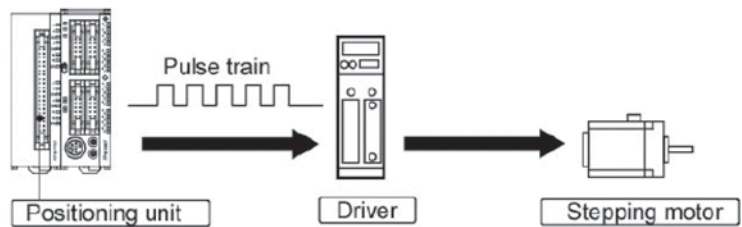

Positioning control using a servo motor

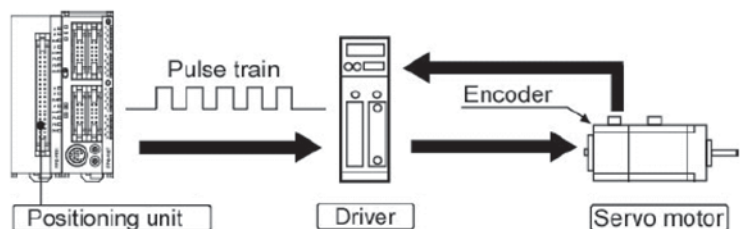


1-axis and 2-axis types are available.

Multiple axes (up to 2 axes) can be controlled with a single unit.

RTEX multi-axis network servo system

The RTEX positioning units support Minas A4N network servo drives. A mutually optimized system consisting of PLC and servo drive greatly simplifies installation.

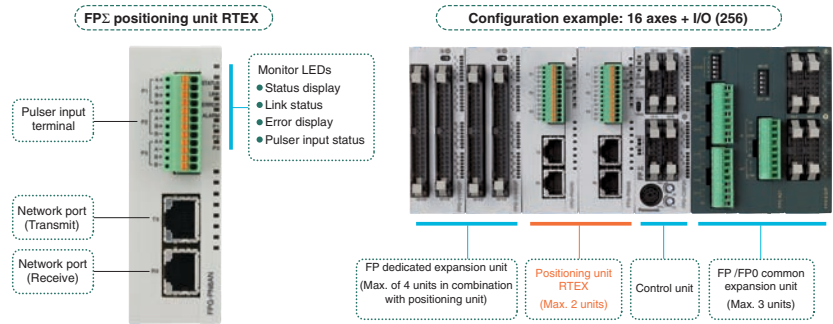

System configuration:


- Maximum number of control axes: 16. Realization of highly accurate 2-axis circular interpolation, 3-axis linear interpolation and 3-axis spiral interpolation with high-speed 100Mbps communication.
- With 3 types in the product range, for 2 axes, 4 axes and 8 axes provide flexible support even for control of small numbers of axes.
- Loop wiring Realtime Express* provides high reliability by creating smooth communication conditions in which data always flows in the same direction.

*Matsushita Electric Industrial network servo systems

Specifications:

		2-axis type	4-axis type	8-axis type	
Part number FP Σ (Sigma) / FP2		FPG-PN2AN	FPG-PN4AN	FPG-PN8AN	
Unit specifications	Positioning control functions	Control method			PTP Control, Cursor Path (CP) Control
		Interpolation control			2-axis/3-axis linear interpolation, 2-axis circular interpolation, 3-axis spiral interpolation
		Control units			Pulse/ μ m/inch/degree
		Position data			600 points for each axis
		Backup			Parameters and data file can be saved to FROM
		Acceleration/deceleration method			Linear acceleration/deceleration/S-curve acceleration/deceleration
		Acceleration/deceleration time			0 to 10,000ms (1ms units) different settings for acceleration and deceleration are possible
		Positioning area			(-1,073,741,823 to 1,073,741,823 pulse) increment and absolute specification
	Speed control functions		Supported with JOG operation (free run operation)		
	Origin functions	Search method	Origin proximity (DOG) search		
Creep speed		Free settings possible			
Other functions	Pulser input operation support				
	Auxiliary output code, auxiliary output contact support				
	Dwell time support				
Communication specifications	Communication speed		100Mbps		
	Cable		Commercially available LAN straight cable (shielded category 5e)		
	Connection method		Ring method		
	Communication cycle/no. of terminals		0.5ms; max. 8 axes/system (command cycle: 1ms)		
	Transmission distance		Between terminals: 60m; total length: 200m		

FP-X series

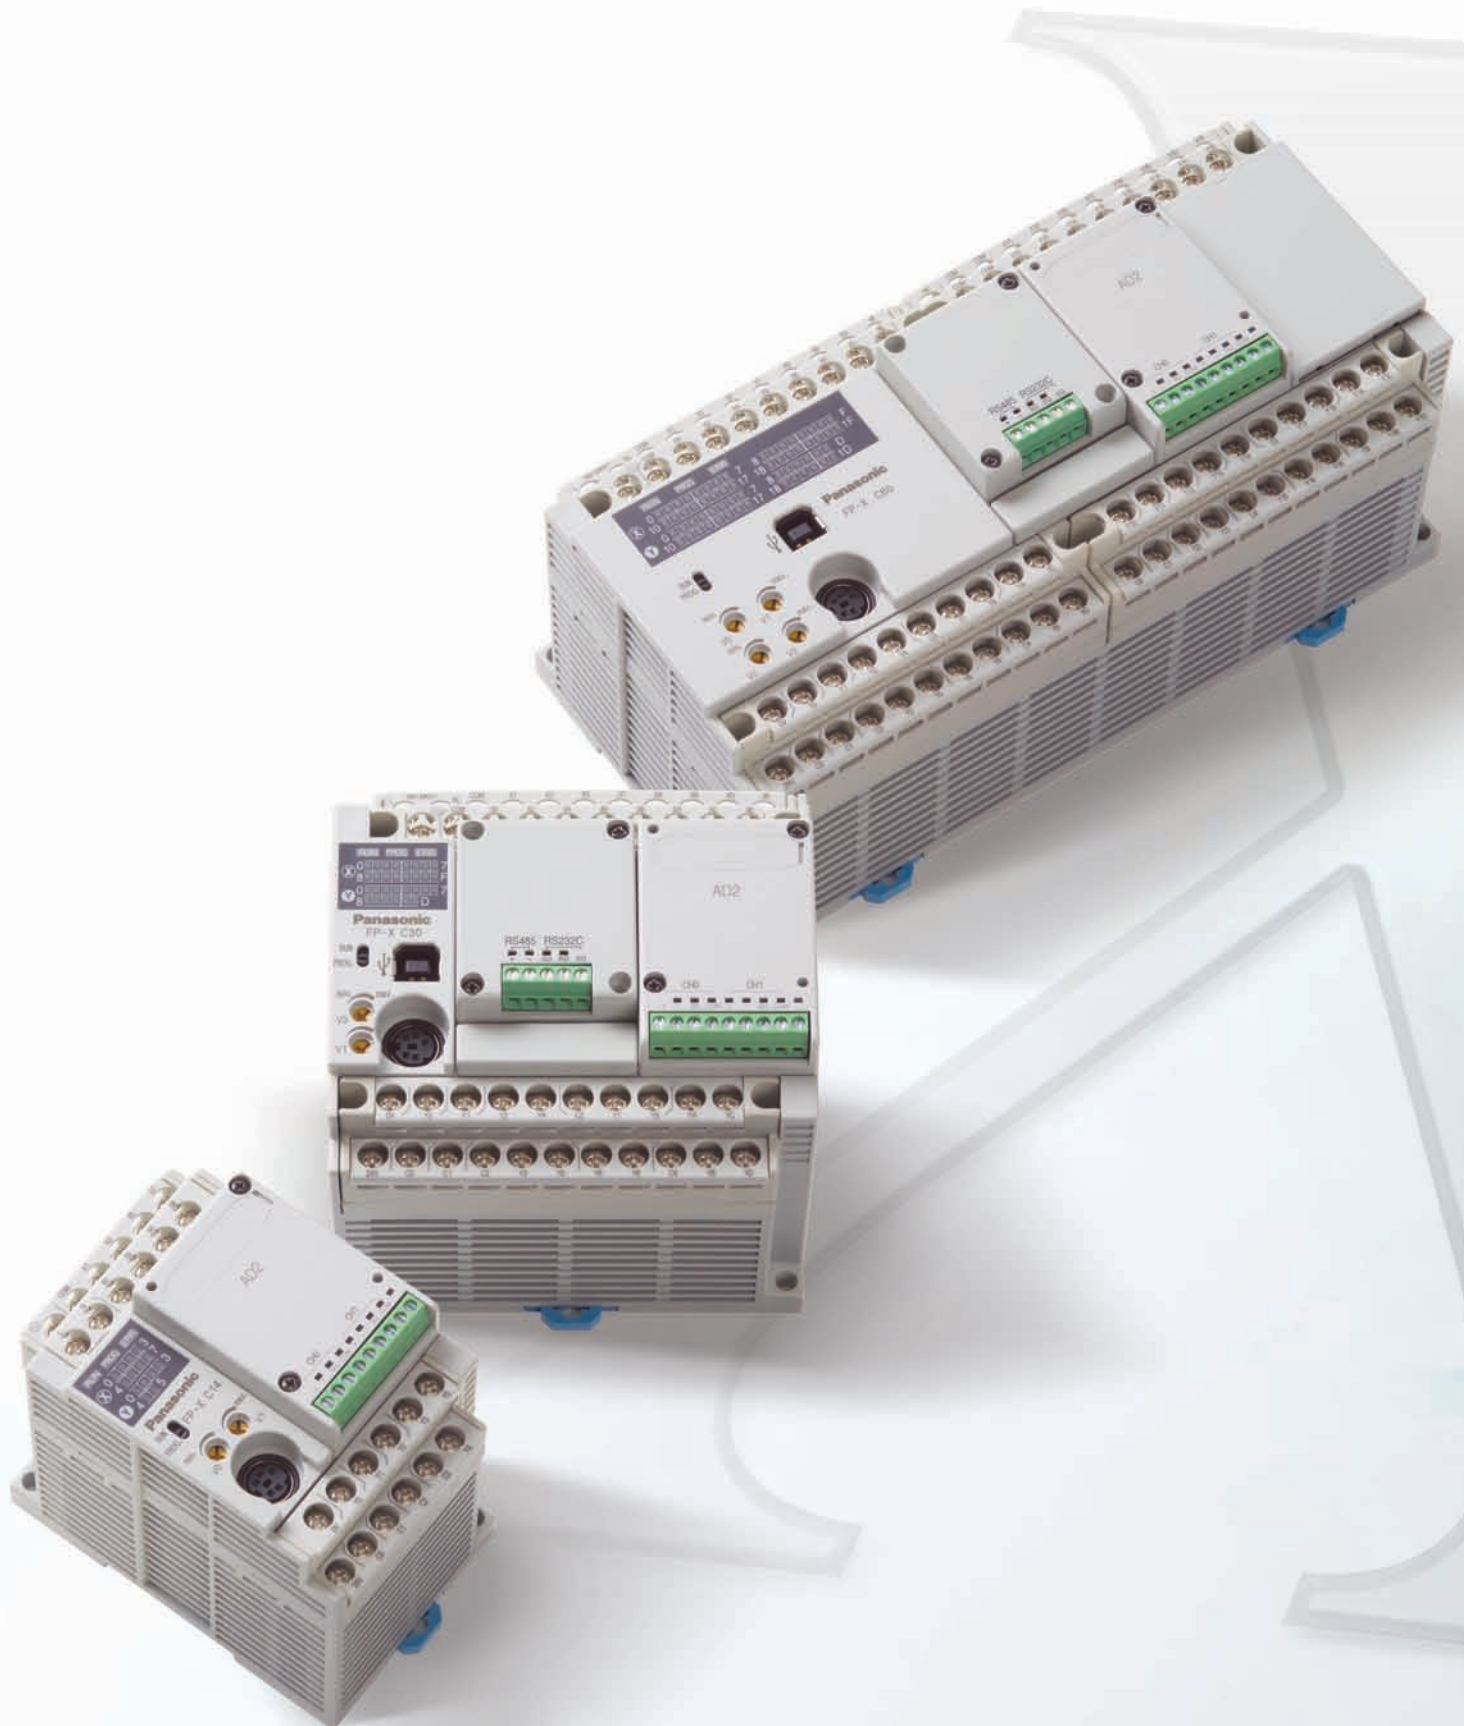

An advanced compact model

Features

- Abundant program capacity – 32k steps
The 32k-step program capacity can accommodate an increase in the number of programs accompanying functionality enhancements, expansions, or changes of equipment.
- Equipped with an independent comment memory
All of 100,000 I/O comments, 5000 lines of line-space comments and 5000 lines of remark comments are saved in FP-X together with programs.
- Equipped with a high-speed RISC processor
Equipped with a RISC processor, achieving high-speed processing with a scan time of less than 2ms for 5000 steps.
- Add-on cassettes can expand the functionality, maintaining the space-saving size
Up to three add-on cassettes can be attached to the control unit. Functionality can be enhanced without increasing the required footprint. The 16 types of add-on cassettes, including the communication and analog types, cover a wide variety of applications.
- Multi-axis control by the built-in pulse output
The transistor output type controller has a built-in pulse output that allows multi-axis control of the servo and stepping motors.
C14: 3 axes, C30/C60: 9 axes.



High security program protection with an 8-digit password and a function prohibiting uploads

USB-port * Easy direct connection with a PC via a commercial USB cable (AB type)

* Not provided with a C14

PLC type	AFPX-C14	AFPX-C30	AFPX-C60
Number of inputs	8	16	32
Number of outputs	6 relays or transistors	14 relays or transistors	28 relays or transistors
Output capacity	Relay outputs: 2A, transistor outputs: 0.5A		
Max. number of digital I/Os	366	352	382
Max. number of analog I/Os	26		
Processing speed	0.32µs/step (basic instruction)		
Memory			
Memory type	Built-in Flash ROM		
Program capacity	C14: 16k steps, C30/C60: 32k steps		
Data register	C14: 12,285 words, C30/C60: 32,765 words		
Special functions			
High-speed counter	Input of main unit: Transistor output types: Single-phase 8ch (50kHz x 4ch + 10kHz x 4ch), Two-phase 4ch (35kHz x 1ch, 25kHz x 1ch, 5kHz x 2ch) Relay output types: Single-phase 8ch (10kHz x 8ch), Two-phase 4ch (5kHz x 4ch)		
Pulse output	Input of pulse I/O cassette AFPX-PLS (for relay output types): Single-phase: 2 channels 80kHz or 4 channels 50kHz Two-phase: 1 channel: 30kHz or 2channels: 25 kHz Built-in transistor outputs: 100kHz x 2ch + 20kHz x 2ch Pulse I/O cassette AFPX-PLS (for relay output types only): One unit (one axis) 100kHz, or two units (two axes) 80kHz		
Serial interfaces	Up to 3 serial interfaces, C30/C60 also USB port		
Real-time clock	Available when AFPX-MRTC installed		
Other functions	Password (4 digits, 8 digits), upload protection, comment storage (328kByte)		
Operating voltage range	85 to 264VAC (AC power), 20.4 to 28.8VDC (DC power)		

High adaptability

Add the cassettes you need to meet your individual needs

The add-on cassettes can easily be mounted onto the control unit, up to 2 cassettes on the C14 or 3 cassettes on the C30/C60. By using one communication cassette, which can be stacked on top of another expansion cassette, even the FP-X's communication can be expanded.




Easily removable
(two screws to secure the unit)


Built-in 4-axis pulse output: 2-axis linear interpolation simultaneously in two sets

The transistor output type C14 comes with 3-axis while C30/60 comes with 4-axis pulse output inside the control unit. The multi-axis control, which previously required a higher-level PLC or additional positioning unit, or two or more PLC units, can now be achieved with only one FP-X transistor output type unit in a small space at a low cost.

FP-X transistor output type is capable of simultaneously controlling 2-axis linear interpolation, for the first time in the industry with a compact pulse-output PLC.




XY Table + Processing Head



3-axis Control with C14.


Semiconductor Wafer Takeout Blade



4-axis Control with C30/C60


The master memory cassette makes transferring a program easy, and a real-time clock is also included

- The built-in 1MB Flash-ROM can store a 32k-step program as well as the comments of FPWIN Pro source file.
- The master memory cassette allows you to conveniently update a program on an FP-X in the field.
- Because the master memory cassette can store password information, you can easily enjoy all the security features the FP-X offers even when transferring programs in the field.
- The built-in real-time clock enables repeated periodical control and data logging.

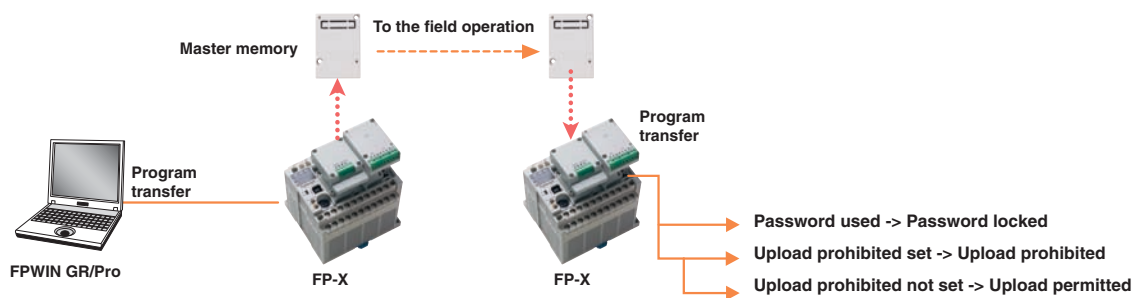




Expensive USB conversion adapter/cable unnecessary

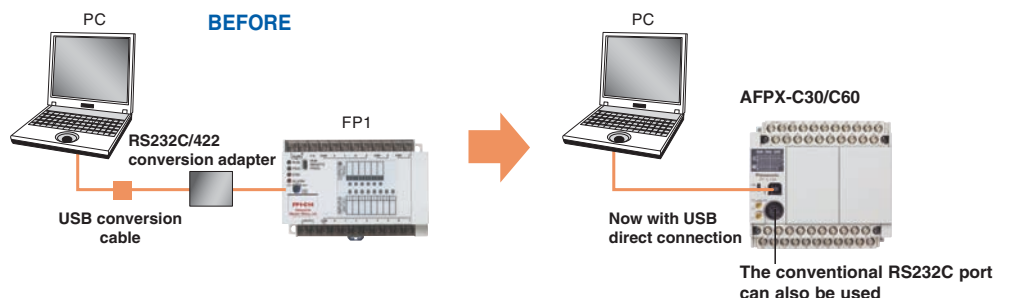


Now you can connect your PC directly to the FP-X C30's or C60's USB port.





Product lineup


The highly expandable lineup satisfies a wide range of demands

Control unit	Relay output		Transistor output	
	DC power supply	AC power supply	DC power supply	AC power supply
 Program capacity: 16k steps 2-point potentiometer	AFPX-C14RD	AFPX-C14R	AFPX-C14TD (NPN) AFPX-C14PD (PNP)	AFPX-C14T (NPN) AFPX-C14P (PNP)
	8-point input of 24VDC 6-point output of 2A relay	8-point input of 24VDC 6-point output of 2A relay	8-point input of 24VDC 0.5A/5 to 24VDC 6-point output of transistor	8-point input of 24VDC 0.5A/5 to 24VDC 6-point output of transistor
 Program capacity: 32k steps 2-point potentiometer, equipped with a USB communication port	AFPX-C30RD	AFPX-C30R	AFPX-C30TD (NPN) AFPX-C30PD (PNP)	AFPX-C30T (NPN) AFPX-C30P (PNP)
	16-point input of 24VDC 14-point output of 2A relay	16-point input of 24VDC 14-point output of 2A relay	16-point input of 24VDC 0.5A/5 to 24VDC 14-point output of transistor	16-point input of 24VDC 0.5A/5 to 24VDC 14-point output of transistor
 Program capacity: 32k steps 4-point potentiometer, equipped with a USB communication port	AFPX-C60RD	AFPX-C60R	AFPX-C60TD (NPN) AFPX-C60PD (PNP)	AFPX-C60T (NPN) AFPX-C60P (PNP)
	32-point input of 24VDC 28-point output of 2A relay	32-point input of 24VDC 28-point output of 2A relay	32-point input of 24VDC 0.5A/5 to 24VDC 28-point output of transistor	32-point input of 24VDC 0.5A/5 to 24VDC 28-point output of transistor

Expansion unit	Relay output		Transistor output	
	DC power supply	AC power supply	DC power supply	AC power supply
 Remarks: 2 or more E16s cannot be connected serially because they cannot supply the power to other units.	AFPX-E16R	AFPX-E14YR	AFPX-E16T (NPN) AFPX-E16P (PNP)	
	8-point input of 24VDC 8-point output of 2A relay	14-point output of 2A relay	8-point input of 24VDC 0.5A/5 to 24VDC 8-point output of transistor	
 Remarks: Addition of up to 8 units is possible including E16 and EFP0.	AFPX-E30RD	AFPX-E30R	AFPX-E30TD (NPN) AFPX-E30PD (PNP) AFPX-E16X (16-point input only)	AFPX-E30T (NPN) AFPX-E30P (PNP)
	16-point input of 24VDC 14-point output of 2A relay	16-point input of 24VDC 14-point output of 2A relay	16-point input of 24VDC 0.5A/5 to 24VDC 14-point output of transistor	16-point input of 24VDC 0.5A/5 to 24VDC 14-point output of transistor
	Input only AFPX-E16X			
	16-point input of 24VDC.			

Add-on cassette

	Application cassette	
	Part number	Description
	AFPX-IN4T3	Input/output cassette (4-point input of 24VDC, NPN 0.3A/3-point output of 24VDC)
	AFPX-IN8	Input cassette (8-point input of 24VDC)
	AFPX-TR8	Output cassette (NPN 0.3A/8-point output of 24VDC)
	AFPX-TR6P	Output cassette (PNP 0.5A/6-point output of 24VDC)
	AFPX-PLS	Pulse I/O cassette (High-speed counter input: single phase 80kHz 2ch, 2-phase 30kHz 1ch) (Pulse output: 1 axis 100kHz < CW/CCW, pulse + sign >) *Cannot be built into a transistor output type.
	AFPX-AD2	Analog input cassette (2 points, 0 to 10 V/0 to 20mA 12-bit non-insulated)
	AFPX-A21	Analog I/O cassette Input: 2ch (0 to 5V/0 to 10V or 0 to 20mA 12-bit insulated) Output: 1ch (0 to 10V or 0 to 20mA 12-bit insulated)
	AFPX-DA2	Analog output cassette 2ch (0 to 10V or 0 to 20mA 12-bit insulated 2ch)
	AFPX-TC2	Thermocouple input cassette, (K/J type, resolution: 0.2°C, insulated 2ch)
	AFPX-RTD2	RTD input with 2 channels (insulated)
	AFPX-MRTC	Master memory cassette with a real-time clock* (32k-steps program memory + real-time clock in year/month/day/hour/minute) *Real-time clock requires an optional battery. (Real-time clock → Calendar timer)

	Communication cassette	
	Part number	Description
	AFPX-COM1	Communication cassette (RS232C 1ch)
	AFPX-COM2	Communication cassette (RS232C 2ch)
	AFPX-COM3	Communication cassette (RS485/422 selectable 1ch insulated)
	AFPX-COM4	Communication cassette (RS485 1ch insulated + RS232C 1ch)
	AFPX-COM5	Communication cassette (Ethernet 1ch + RS232C 1ch)
	AFPX-COM6	Communication cassette (RS485 2ch insulated)

Expansion FP0 adapter

Part number	Description
AFPX-EFP0	Up to 3 FP0/FP0R expansion units can be connected.

Add-on cassette (Ethernet)

This Ethernet cassette fulfills user requirements such as the “easy collection of inspection/production data” or “remote changing of PLC programs” using LAN (Ethernet).

AFPX-COM5




Enables easy Ethernet connections with a compact PLC, which were previously not possible. Also equipped with an RS232C port. Together with the tool port (programming port), a total of 3 communication ports are available, which is remarkable for a compact PLC. For example, the following operations are simultaneously available with this cassette attached:

1. I/O control
2. Reading data from a tester (measuring instrument) of inspection equipment (RS232C)
3. Collecting read data from host computer (Ethernet)
4. Setting/monitoring via a touch panel (Tool port)


Application

- Data collection

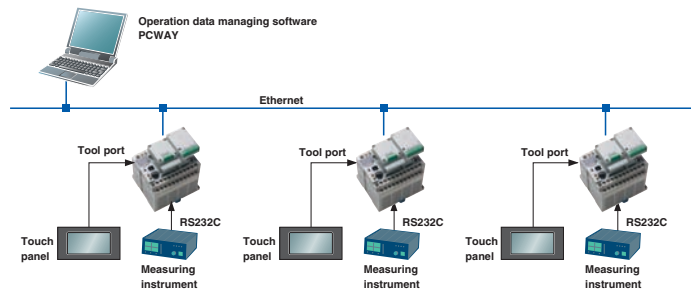

- Remote maintenance

Program/monitoring

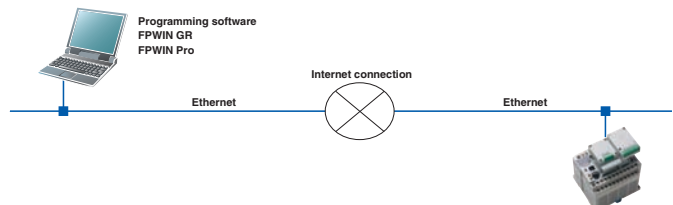


Interface	Specifications and functions
Ethernet (COM1)	10BASE-T, 100BASE-TX, TCP/IP, Baud rate: 9600bit/s/115,200bit/s • MEWTOCOL-COM master/slave (3 connections max.) • General-purpose serial communication (1 connection max.) Server function, client function
RS232C (COM2)	• 3-wire (RD, SD, SG), Asynchronous, Baud rate: 300bps to 115,200bit/s • MEWTOCOL-COM master/slave • General-purpose serial communication • Modbus-RTU master/slave

Ethernet port functions		Specifications
MEWTOCOL-COM master/slave		• Automatically sends responses without communication programs to commands of Matsushita's open protocol MEWTOCOL. • Contact/word data writing/reading, program editing • PCWAY, FPCWIN GR and FPCWIN Pro are supported
General purpose serial communication	Server function	• Waits for a connection from a client PC (personal computer), and after the connection has been established, receives data from the PC
	Client function	• After the power has been turned on, establishes a connection to a preset IP address and sends data

Use our free software “Configurator WD” for setting up the Ethernet port (e.g. IP address and operation mode).

Download the software free of charge from:
www.panasonic-electric-works.com

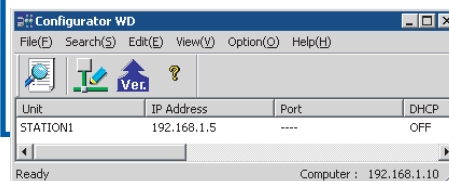


Positioning

FP-X perfectly fits the need for low cost “multi-axis positioning control in small-scale equipment”.


Built-in 4-axis pulse output (transistor output type)

The transistor output type C14 comes with 3-axis while C30/C60 comes with 4-axis pulse output inside the control unit. Multi-axis control, which previously required a higher-level PLC or additional positioning unit, or 2 or more PLC units, can now be achieved with only 1 FP-X transistor output type unit in a small space at a low cost. In addition, as this type does not require a pulse I/O cassette as needed for a relay output type, other function expansion cassettes such as communication or analog input can be attached for more diversified applications.

Item	Specification
Pulse output Max. frequency	C14: 100kHz(CH0,1), 20kHz(CH2) C30,C60: 100kHz(CH0,1), 20kHz(CH2,3)
Output type	CW/CCW, Pulse + Direction Output
Function	Trapezoidal control, table shaped control, jog operation, home return, 2-axis linear interpolation

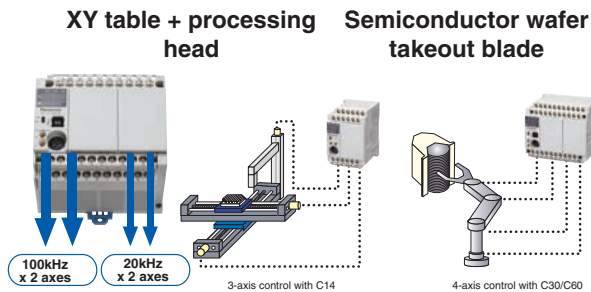

The relay output type can control 2 axes by using the expansion cassettes




Pulse output up to 2-axis 80kHz is possible by loading 2 pulse I/O cassettes (AFPX-PLS). Also capable of performing 2-axis linear interpolation.

Remark:
Pulse I/O cassette does not work with control unit transistor output type.


2-axis linear interpolation simultaneously in 2 sets (transistor output type)

2-axis linear interpolation refers to moving a robot arm or equipment head diagonally on a straight line by simultaneously controlling 2 motor shafts. It is used for palletizing, component pick and place, XY table control, contour cutting of a PC board, etc. The FP-X transistor output type is capable of simultaneously controlling 2-axis linear interpolation, for the first time in the industry with a compact pulse-output PLC. This unit dramatically expands the range of applications along with the added convenience of programming by using the linear interpolation command F175 (SPSH).

Simultaneous control of 2 mechanisms

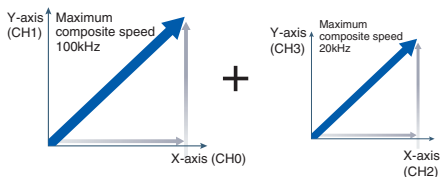

Controls 2 units of 2-axis XY table

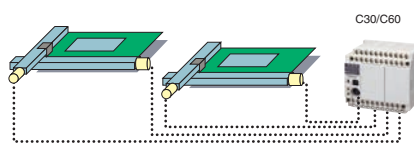


The relay output type is also capable of 2-axis linear interpolation.

By adding 2 pulse I/O cassettes (AFPX-PLS), linear interpolation is possible at the maximum composite speed of 80kHz. The command used for this unit is F175 (SPSH), the same as that for the transistor output types.

High-speed counters 8 built-in sets

8 single-phase or 4 dual-phase sets (X0-X7)



Model type	Input mode	1 channel in use	All channels in use
Transistor output type	Single phase	100kHz	50kHz x 4ch + 10kHz x 4ch
	Dual Phase	35kHz	20kHz x 2ch + 5kHz x 2ch
Relay output type	Single phase	10kHz	10kHz x 8ch
	Dual phase	5kHz	5kHz x 4ch

When adding a pulse I/O cassette to the relay output type, 2 high-speed counter sets can be added to every cassette. Please refer to the user manual for counter specification.


FP2/FP2SH series



FP2 series: Basic CPUs

Features

- Compact body 140 x 100mm (WxH)*
The functions for a medium-scale PLC are squeezed into a compact body which requires minimal installation area for an overall reduction in the device size.
*The five-module type. D: 108.3mm
- Module specifications that allow you to design as you desire
Backplanes for 5, 7, 9, 12, and 14 modules are available, and since the units have the same width, you can choose the most economical design for your application.
- Standard equipped with RS232C port
RS232C port allows connection with operation display panels and host computers, as well as remote surveillance using modems.
- Different memory options are available to meet your application
Memory units for comment, calendar timer, expansion RAM and ROM operation are available so you can add just the options you need.
- Dedicated instructions for high level data processing
Real number data operation is supported, too, enabling you to simplify programs for data processing.

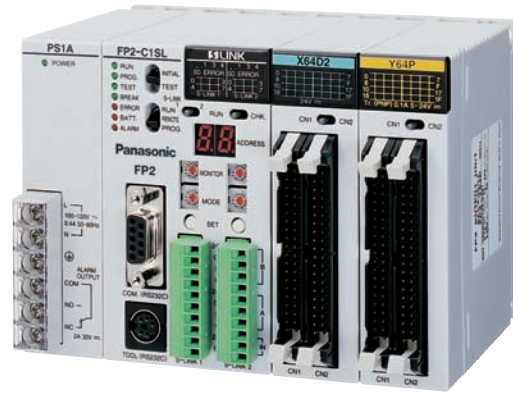

Power supply/I/O specifications

Item	Description
Power supply	100V to 120VAC/200V to 240VAC/100V to 240VAC, 24V DC (varies with different models)
Input	12V to 24V DC, 24VDC ±common
Output	Relay 2A to 5A/ Transistor 0.1A to 0.5A (varies with different models)

Performance specifications

Item	Description
Number of I/O points	Up to 768 points
Expansion	Standard Units: 25 max. I/O points: 1600 max. Remote I/O points: 2048 max.
Output	H type Up to 3 backplanes Units: 32 max. I/O points: 2048 max. Remote I/O points: 2048 max.
Operation speed	0.35µs/step (basic instruction)
Built-in memory	RAM (ROM is optional)
Memory capacity	Approx. 16k steps
Operation memory	Internal relays
	Timer/Counter (T/C)
	Data register

Special functions

Item	Description
Analog I/O	Available by adding analog input and analog output units
High-speed counter	Available by adding high-speed counter unit (max. 200kHz)
Pulse output	Positioning unit 2-axis positioning unit 4-axis
Serial	RS232C port
	RS422 RS485
Interrupt input	Available by adding high-speed counter unit or pulse I/O unit

Special network functions


Item	Description
Remote I/O	S-LINK, MEWNET-F
PLC Link/ Fieldbus network	MEWNET-W2 (Wire) MEWNET-W0 PROFIBUS, DeviceNet, CANopen, PROFINET IO
Computer Link	Linkable by using tool port or COM. port on CPU unit. Also available by adding MCU and CCU
Modem connection	Available

Other built-in functions

Item	Description
Program block-edit during RUN	Available
Constant scan	Available
Clock/Calendar function	Can be used with the addition of the calendar function option

Item	Part numbers
Standard type CPU	FP2-C1
CPU with 64points input	FP2-CS1D
CPU with S-LINK	FP2-C1SL

Positioning units (interpolation type)

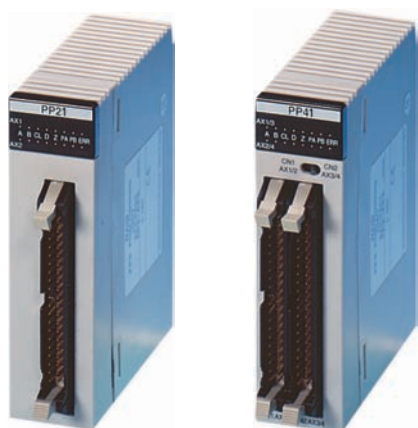

Features

- Synchronized operation is supported in addition to linear, circular and helical interpolation controls
Ideal for palletizing, pick-and-place operations, coil winding machines, transfer equipment, etc.
- Open collector and line driver types are available
The line driver type is recommended for high-speed pulse outputs, higher reliability or long distance wiring.
- Configurator PM facilitates settings, reducing the number of man-hours required for startup
The dedicated setting software reduces programming labor and supports quick startup.
- Speed command of a maximum of 4Mpps (line driver)
The industry's fastest class 4Mpps output allows for use in high-speed transfer equipment.
- Sufficient number of positioning tables: 600 points/axis
The number of tables is effective for complicated processing or highmix production.

Specifications

Functions	2-axis type	4-axis type
Interpolation control	Two-axis linear/circular, two-axis synchronized	Two-axis linear/circular, three axis linear/helical, two-axis synchronized
Positioning method	Absolute/incremental positioning	
Positioning unit	Pulse / 1 μ m / 0.1 μ m / 0.0001 inch / 0.00001 inch / 1 degree / 0.1 degree	
Positioning command range	-1,073,741,823 to 1,073,741,823 x positioning unit	
Speed command range	pulse: 1 to 32,767,000pps \pm m: 1 to 32,767,00 \pm m/s inch: 0.001 to 32,767.000 inch/s degree: 0.001 to 32,767.000 rev/s	
Acceleration/deceleration method	Linear/S-curve acceleration and deceleration	
Acceleration/deceleration time	0 to 10,000ms (in increments of 1ms)	
Number of positioning tables	Each axis: 600 point (standard area), 25 points (expansion area)	
Startup speed	3ms max. (standard area), 5ms max. (expansion area)	
Manual operation	JOG operation, home return, pulser operation (with pulser input)	
Home return method	Home proximity (dog): 3 types, Limit: 2 types, Data setting, Z-phase	
Internal current consumption/ Max. number of connectable units	300mA max (5V DC) / 15 units max. (Requirements: 5A output type power supply + FP2-C1 + H type backplanes (Master: 1, Expansion: 1))	


Products

Product name	Number of axes	Output method	Part number
FP2 positioning units (Interpolation type)	2 axes	Open collector	FP2-PP2T
		Line driver	FP2-PP2L
	4 axes	Open collector	FP2-PP4T
		Line driver	FP2-PP4L
Control configurator PM (English)	Position data setting, interpolation/synchronization axis setting, JOG operation control, status check, etc.		AFPS66510

FP2H series: Ultra-high performance

Features

- Scanning time of 1ms for 20k steps
An operating speed at the top of its class enables high-speed processing and a dramatically decreased tact time.
- Large programming capacity of up to 120k steps
60k and 120k programming capacities are available depending on the model.
- Optional small PC card is also available
The small PC card is available for programming backup or data memory expansion. This allows great amounts of data to be processed.
- Built-in comment and calendar timer functions
These functions, options with the FP2, are built right into the FP2SH
- The I/O unit and intelligent unit are the same as for the FP2 series.

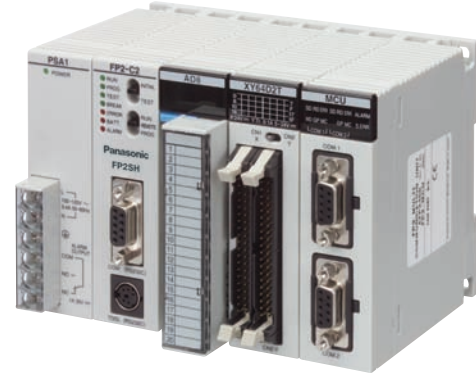

Power supply/I/O specifications

Item	Description
Power supply	100V to 120VAC / 200V to 240VAC 100V to 240VAC, 24VDC (varies with different models)
Input	12V to 24VDC, 24VDC ±common
Output	Relay 2A to 5A / Transistor 0.1A to 0.5A (varies with different models)

Performance specifications

Item	Description
Number of I/O points	Up to 768 points
Expansion	Standard Up to 1 backplane Units: 25 max. I/O points: 1,600 max. Remote I/O points: 8,192 max.
	H type Up to 3 backplanes Units: 32 max. I/O points: 2,048 max. Remote I/O points: 8,192 max.
Operation speed	0.03µs/step (basic instruction)
Built-in memory	RAM (ROM/Small PC card is optional)
Memory capacity	Approx. 60k steps/approx. 120k steps (varies with different models)
Operation memory	Internal relays 14,192 points
	Timer/Counter (T/C) 3072 points in total
	Data register 10,240 words
	File register 32,765 words x 3 banks

Special functions

Item	Description
Analog I/O	Available by adding analog input and analog output units
High-speed counter	Available by adding high-speed counter unit (max. 200kHz)
Pulse output	Positioning unit 2-axis positioning unit 4-axis
Serial	RS232C port Standard equipped with CPU unit Expandable by adding CCU, MCU and serial data unit
	RS422 RS485 Expandable by adding MCU
Interrupt input	Available by adding high-speed counter unit or pulse I/O unit

Special network functions

Item	Description
Remote I/O	S-LINK, MEWNET-F
PLC Link/ Fieldbus network	MEWNET-W2 (Wire) MEWNET-W0 MEWNET-VE PROFIBUS DeviceNet CANopen PROFINET I/O
	Computer Link Linkable by using tool port or COM. port on CPU unit. Also available by adding MCU and CCU
	Modem connection Available

Other built-in functions

Item	Description
Program block-edit during RUN	Available
Constant scan	Available
Clock/Calendar function	Built-in type


Item	Part numbers
Standard type CPU (60k steps)	FP2-C2
CPU for small PC card (60k steps)	FP2-C2P
CPU for small PC card (120k steps)	FP2-C3P

FP2/FP2SH series


FP2/FP2SH system configurations and unit lineup

Unit combinations

- Most units occupy one slot, though some units occupy two slots.
- When selecting a backplane, carefully consider the units and number of slots you need.
- The power supply unit and CPU unit must be mounted on the CPU backplane.



Power supply units

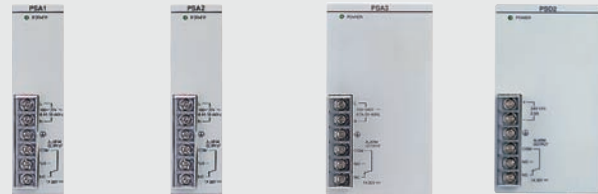

100 V AC,
2.5 A type
FP2-PSA1

200 V AC,
2.5 A type
FP2-PSA2

100 to 240 V AC,
5 A type
FP2-PSA3

24 V DC,
5 A type
FP2-PSD2

Backplanes

(For use with both master and expansion backplanes. Only the 5-module type can not be used with expansion backplane.)



5-module type
FP2-BP05



7-module type
FP2-BP07



9-module type
FP2-BP09



12-module type
FP2-BP12



14-module type
FP2-BP14

H type backplanes



H type master backplane
(11 modules): 8 slots
FP2-BP11MH



H type expansion backplane
(10 modules): 8 slots
FP2-BP10EH

■ Units that occupy two modules each

Type	Model No.
Power supply unit, 5 A type	FP2-PSA3 FP2-PSD2
CPU unit with 64 input points	FP2-C1D
CPU unit with S-LINK ports	FP2-C1SL



Expansion cable
(60cm)
FP2-EC



Expansion cable
(2m)
FP2-EC2



Dummy unit
FP2-DM

CPU units

FP2



Standard type
FP2-C1



With 64-point input
FP2-C1D



With S-LINK
FP2-C1SL

FP2SH



Standard type
(60k steps)
FP2-C2



For small PC card
(60k steps)
FP2-C2P




For small PC card
(120k steps)
FP2-C3P

- Except for the 5-module expansion backplane, all backplanes can be expanded.
- If the backplane is of the H type, up to three backplanes can be added.
- Most of the units can be used in any combination; however, some combinations are subject to constraints due to the unit type, current consumption, etc.

Please contact us for details.

Input and Output units




16-point DC input
FP2-X16D2

16-point NPN transistor output
FP2-Y16T

16-point PNP transistor output
FP2-Y16P

6-point relay output (5A)
FP2-Y6R


16-point relay output (2A)
FP2-Y16R



32-point DC input
FP2-X32D2

32-point NPN transistor output
FP2-Y32T

32-point PNP transistor output
FP2-Y32P



64-point DC input
FP2-X64D2

64-point NPN transistor output
FP2-Y64T

64-point PNP transistor output
FP2-Y64P

32-point input/32-point NPN output mixed
FP2-XY64D2T


FP2-XY64D7T

32-point input/32-point PNP output mixed
FP2-XY64D2P


FP2-XY64D7P

Optional memories

For FP2



FP2-EM1
FP2-EM2




FP2-EM3
FP2-EM6
FP2-EM7


Type of memory unit

Product number	Part number	Comment input function	Clock/calendar function	With 16k expansion RAM	ROM socket
FP2-EM1	AFP2201	A	A	N/A	N/A
FP2-EM2	AFP2202	A	A	A	N/A
FP2-EM3	AFP2203	A	A	A	A
FP2-EM6	AFP2206	N/A	N/A	A	A
FP2-EM7	AFP2207	N/A	N/A	N/A	A


A: Available
N/A: Not available



F-ROM
FP2-EM4 (AFP2204)




EP-ROM
FP2-EM5 (AFP2205)




FP Memory Loader


For FP2SH




Memory unit with ROM socket
FP2-EM7 (AFP2207)




F-ROM (AFP5208)



Small PC card (2MB)
F-ROM (AIC50020)




Small PC card (2MB)
SRAM (AIC52000)




EP-ROM (AFP5209)

Data clear/
Data hold type
AFP8670/
AFP8671


Analog input/output units




Voltage/current input unit
FP2-AD8VI



Multiple analog input unit
FP2-AD8X




Resistance thermometer device input unit
FP2-RTD




Analog output unit
FP2-DA4


Positioning units




(2-axis)
Positioning units
RTEX
FP2-PN2AN




(4-axis)
Positioning units
RTEX
FP2-PN4AN



(8-axis)
Positioning units
RTEX
FP2-PN8AN




(2-axis)
Positioning units
FP2-PP21 FP2-PP22
FP2-PP2T FP2-PP2L




(4-axis)
Positioning units
FP2-PP41 FP2-PP42
FP2-PP4T FP2-PP4L


Link-related units




High-speed counter unit
FP2-HSCT FP2-HSCP




Pulse I/O unit
FP2-PXYT FP2-PXPY



Multi-communication unit
FP2-MCU




Serial data unit
FP2-SDU




Computer communication unit
FP2-CCU

* The communication blocks are available separately.


Link-related units




FP2 VE-LINK
FP2-VE2




ET-LAN
FP2-ET2



Multi-wire link unit
FP2-MW




Fieldbus Master units
FP2-DPV1/DEV/CAN-M
Fieldbus Slave units
FP2-DVP1/DZV/CANPRT-S




S-LINK
FP2-CL2

Panasonic Servo MINAS A5 Series



DVOP0988W



RTEX positioning units for FP2/FP2SH


"RTEX" positioning units

Compatible with Realtime Express MINAS A4N* network servo systems

Facilitate multi-axis high precision positioning

- High-accuracy multi-axis positioning control achieved by high-speed 100Mbps communication.
- Compatible with commercially available LAN cables, significantly reducing wiring costs.
- Two-axis unit available in addition to the four- and eight-axis units.
- Data from a maximum of 600 points can be registered for each axis.
- Three-axis helical interpolation supported in addition to two-axis linear and two-axis circular interpolation functions.
- Dedicated tool software "Configurator PM" supports operations from setup through startup and monitoring.
- Equipped with a manual pulser input terminal, allowing for fine teaching.

High-speed 100Mbps communications

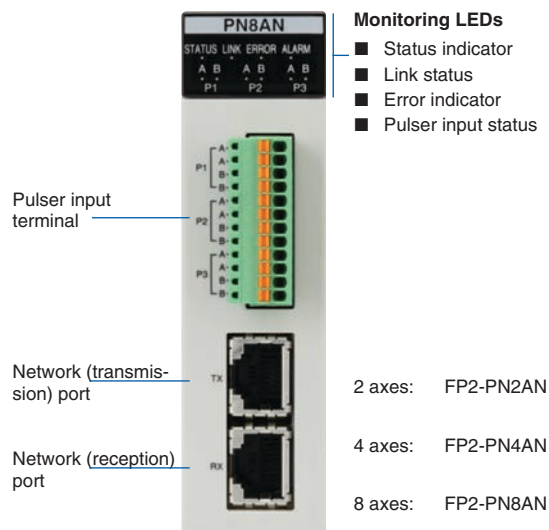

* Realtime Express and MINAS A4N are a trademark and a product name of Panasonic Electric Works

Controls up to 256 axes, adequately supporting large-scale equipment control


- Up to 32 eight-axis units can be connected and up to 256 axes controlled (when using FP2SH with H type backplane).
- Selectable among two, four, and eight-axis types to flexibly support control system configurations of a few or multiple axes.
- Use in combination with the ultra-high speed and large capacity FP2SH CPU unit (20k steps/1ms measured by our company, program capacity of 120k steps) adequately supports the control of large-scale equipment.

No. of positioning units per RTEX unit

FP2: 16 units (limited by consumption current)

FP2SH: 32 units

Control of 2 to 8 axes in one positioning unit

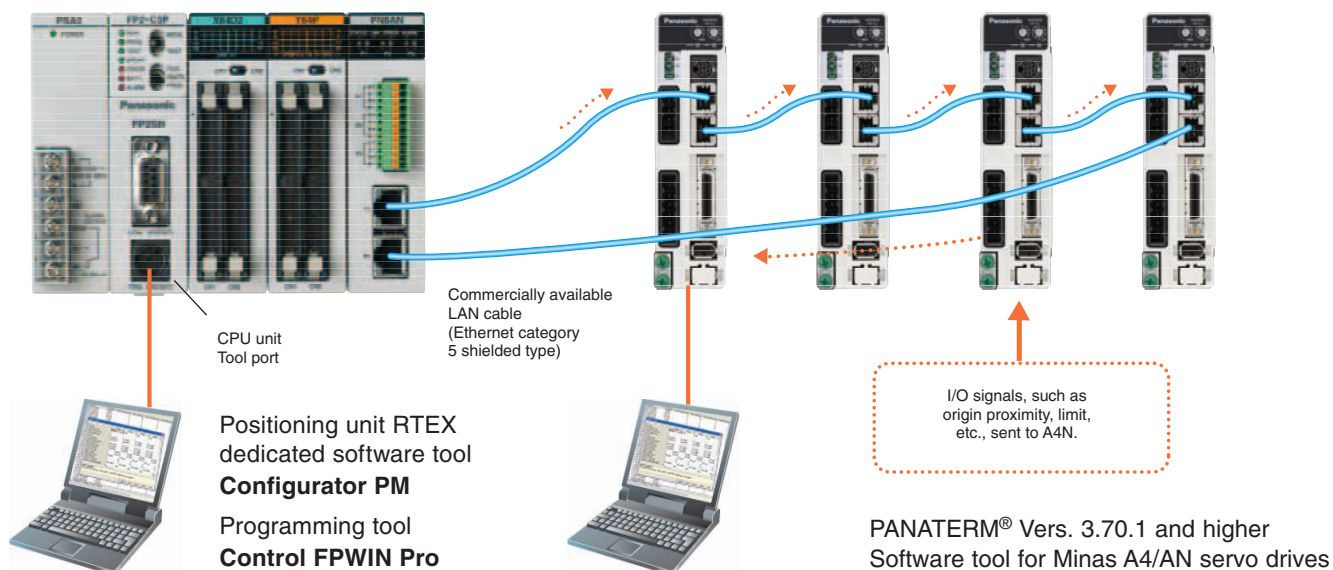


Positioning units


High-speed, high-accuracy pulse output type positioning unit. Speed command: 4Mpps, Startup time: 0.005ms

Support pulse-input type stepping motors, and servo motors. The speed command range is up to 4Mpps, allowing for high-speed and high-accuracy positioning. The startup time is as high as 0.005ms, allowing for a reduction of the tact time. (Startup time: Time between reception of a command from a CPU unit and pulse output from a positioning unit.)

- The feedback pulse count function counts output pulses from encoders or other devices.
- The jog positioning function widens the supported application range.
- The four types of S-curve acceleration/deceleration control allow for smooth startup and stoppage.
- Program libraries for linear interpolation and other operations are available.
- Function "Libraries for FPWIN Pro" can be downloaded from our Website: www.panasonic-electric-works.com
- Motor Driver I/F Terminal II is available for connection with MINAS servo series.



For 1 axis (AFP8503)



For 2 axes (AFP8504)




Positioning unit (2 axes)
FP2-PP21 FP2-PP22



Positioning unit (4 axes)
FP2-PP41 FP2-PP42

Configuration

- One unit can control up to 4 axes.

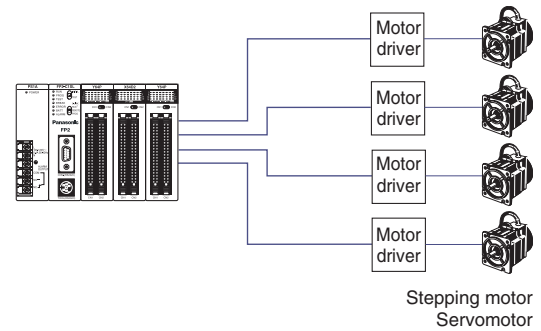

High-speed counter units and pulse I/O units

Interrupt, counting, pulse output, and PWM output functions are integrated in a single unit

- Equipped with four channels of a maximum of 200kHz high-speed counter inputs, allowing for fine control.
- Equipped with eight user-allocatable outputs for the four high-speed counter channels. The number of counter stages can be changed.
- Interrupt function can start interrupt program when the time specified elapses or via external signal.
- Control up to 100kpps pulse output and up to 30kpps PWM output.
- A single module has high-speed counter, interrupt, general I/O, pulse output*, PWM output* functions, allowing for highly efficient system configuration.

* Only available with the pulse I/O units.




High-speed counter units
FP2-HSCT(NPN)
FP2-HSCP(PNP)

Pulse I/O units
FP2-PXYT(NPN)
FP2-PXYP(PNP)



Configuration

Counts RPM based on the encoder output, compares the count with the preset RPM, and instructs the inverter to adjust the speed or stop operation.

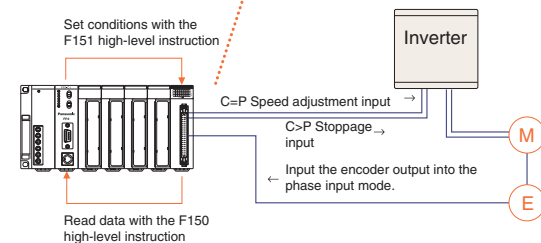


Power supply units


24VDC power supply units for FP-e, FP0R, FPΣ (Sigma), FP-X

Features

- Incredibly small size:
FP0 power supply: 90 x 60 x 30.4mm
FP power supply: 115 x 75 x 42mm
- Multiple voltage input:
85 to 265VAC
- Global approvals
UL/cUL, EN, CE-marking
- Maximum output current:
FP0 power supply: 0.7A (24VDC)
FP power supply: 2.1A (24VDC)
- Optimal protection:
overvoltage, overcurrent, overheating, etc.
- DIN-rail mounting
(FP0 power supply also sidemounting)

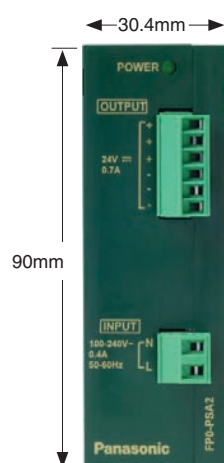

**FP0 Power Supply
FP0-PSA2**

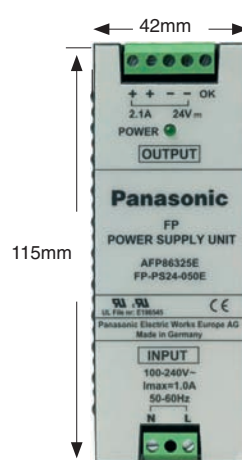

**FP Power Supply
FP-PS24-050 E**

NOTES:

- 1) Mounting distance between the FP0 power supply and the FP0 CPU is needed to permit heat radiation for the FP0-CPU
- 2) For side mounting, 2 additional blue clips are needed: order part-no. 677-021-17101 (1pce.) for FP0-PSA2
- 3) Mounting distance between the power supply FP-PS24-050E and other devices is needed for cooling/heat radiation.

Performance specifications		
Part number:	FP0-PSA2	FP-PS24-050E
Primary side:		
Rated operating voltage	115/230VAC	
Operating voltage range	85 to 265VAC	
Rated operating frequency	50/60Hz	
Operating frequency range	40 to 70Hz	
Inrush current	< 50A at 55°C	< 50A at 25°C / < 70A at 55°C
Current consumption	145mA (at 230VAC and 0.7A output current)	400mA (at 230VAC and 2.1A output current)
Over voltage protection	PROTECTED	
Secondary side:		
Rated output voltage	24VDC	
Output voltage range	23.5V to 24.5VDC	
Nominal output current	0.7A	2.1A
Output current range	0 to 0.7A	0 to 2.1A
Output ripple	< 60mVpp	< 240mVpp
Short circuit protected	Electronic, automatic restart mode	Continuous
Over voltage protected	Yes	
Over load protected	Yes (switch off at approx. 0.8A and more)	Yes (switch off at approx. 3.5A and more)
Holding time	Min. 20ms at 230VAC	Min. 110ms at 230VAC
Power OK signal	-	Yes

General specifications		
Ambient temperature	0°C to +55°C	
Storage temperature	-20°C to +70°C	
Ambient humidity	5 to 95% non-condensing	
Storage humidity	5 to 95% non-condensing	
Vibration resistance	10 to 55Hz, 1 cycle/min.: double amplitude of 0.75mm, 10 min. on 3 axes	
Shock resistance	10g min., 4 times on 3 axes	
Life time min.	7 years at nom. load, 25°C ambient temperature, 20,000h at 55°C with full load/continuous operation	
Mounting	DIN rail or FP0 flat attachment plate	DIN rail
Size	90 x 60 x 30.4mm	115 x 75 x 42mm
Input connection AC side	MC connector, 2 pin	2 pin
Output connection DC side	MC connector, 6 pin, 3 pin for "+" and 3 pin for "-"	5 pin, 2 pin for "+" and 2 pin for "-"; 1 pin Power OK
Status display	LED (green) at the front side for the secondary voltage indication	
Efficiency	≥ 80%	≥ 85%

Standards		
EMC	EN 50082-2, EN 50082-1, EN 50081-2, EN 50081-1	EN 55011/B, EN 55022/B, EN 61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-11
LVD	EN 60950, EN 50178 (overvoltage category 3)	EN 60950, EN 50178 (overvoltage category 2)
Others	UL recognized according to UL 508, UL 1950, cUL recognized according to CAN/CSA-C22.2 No. 950.95	
Protection	IP30	IP20 outside/IP67 inside

Safe, easy and cost-effective M2M communication

Worldwide communications

The FP Web-Server unit connects all FP series controllers to the Ethernet. No changes to the PLC programs are necessary. Simply assign an IP address to the FP Web-Server and connect the PLC to the FP Web-Server via the serial RS232C interface. A standard browser, e.g. MS Internet Explorer, can be used for access at the PC. Configuration of the unit is easily done with the FP Web Configurator Tool, which has to be ordered once separately.

FP Web-Server main features:

Web-Server:

- PLC data presented as HTML pages
- Access via standard Internet browser
- HTML entry field for PLC data change
- Optional password protection
- Java applet functions library

Email:

- PLC can send e-mails, also with PLC data attachments
- E-mail server access via LAN or Internet dial-up
- PLC defined or pre-stored mail text

RS232C device server:

- Ethernet ↔ RS232C conversion (MEWTOCOL)
- Transparent RS232C data tunnelling via Ethernet
- Programming and visualization access via Ethernet

Modem / Ethernet gateway:

- FP Web-Server can be dialed up via modem for local or network access
- One remote gateway for multiple FP Web-Servers in a local Ethernet network
- Remote password handling

Modbus-TCP communication:

- Modbus-TCP server or client for a PLC
- Modbus-TCP server for multiple PLCs
- Modbus-TCP server gateway for Modbus-RTU slave unit(s)
- Modbus-TCP client gateway for any Modbus-RTU master
- Modbus-TCP master or slave interface for a PLC

Other functions:

- XML file delivery for PLC data exchange
- Network time server functions

Part number	
FP Web-Server	FPWEB2
Licence to upgrade an FP Web-Server to an IEC60870 Communicator	IEC60870LIS
FP Web Configurator Tool	FPWEBTOOL2

FP Web-Server advantages:

- Uses existing Intranet, saves wiring
- Uses standard browser, saves Scada software
- Remote control
- Remote monitoring
- Remote programming
- Alarm information via Email
- Interface / protocol converter





IEC60870 Communicator

Based on the same hardware as the FP Web-Server, safe and easy telecontrol with FP series PLCs using the widespread IEC 60870-5 telecontrol standard is possible. Thus remote process stations can easily be linked to supervisory control systems or main telecontrol stations. The IEC60870 Communicator supports both IEC-60870-5-101 communication via RS232C or modem and IEC-60870-5-104 communication via Ethernet in one unit.

Specifications	
Operating voltage	24VDC (10.8 to 26.4VDC)
Current consumption	75mA
LEDs	Power, COM Ethernet connection, COM data exchange
Ambient temperature	0 to +55°C
Ethernet connection	Ethernet-COM: 100 BaseTX (via RJ 45 connector)
PLC connection	PLC COM: RS232C (via 3-pin Phoenix screw terminal)
Modem connection	Modem COM: RS232C (via 9-pin SUB-D with RTS, CTS)
Protocols and standards	TCP/IP, UDP/IP, DHCP, FTP, TELNET, HTTP, SMTP, PPP, XML, IEC60870-5-101, IEC60870-5-104, Modbus-TCP
Flash memory	8 MB
RAM memory	8 MB
Compliance with standards	CE, UL, cUL
Dimensions (WxHxD)	25 x 90 x 64mm


Website editor for FPWEB2

FP Web Designer is an easy-to-use editing tool for creating Websites for visualizing all process graphics and displaying process data collected by FP Web-Server. No programming knowledge for HTML, PHP, JavaScript or Java is required! Extensive graphic libraries help users with their design work.

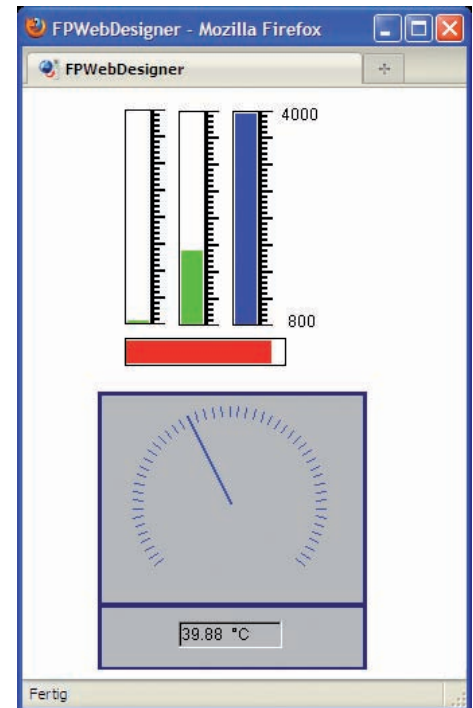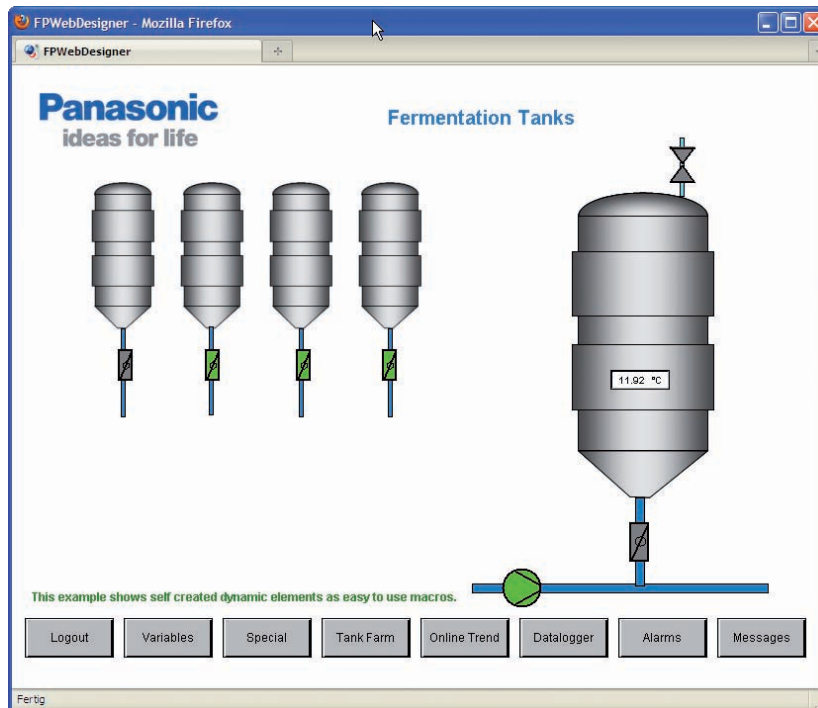

Features of FP Web Designer

- WYSIWYG (What you see is what you get) editor for graphic design of applications
- The designed pages can be called up by a Web browser on any PC connected to LAN or WAN
- All process values are shown automatically on the screen. Each diagram can display up to 5 trend curves for measured values stored in PLCs. A simple mouse click updates the page
- The measured values together with trend curves can be stored as CSV files
- Alarm information can be visualized in web browser and saved. Updating alarm information runs in the background so that the Web pages always display the current status in the browser.
- The Web pages in the browser can be password-protected to prevent unauthorized access and changes
- Process values can be imported in CSV format from PLC programs written with FPWIN Pro
- Extensive and expandable macro libraries available
- Online help in English and German

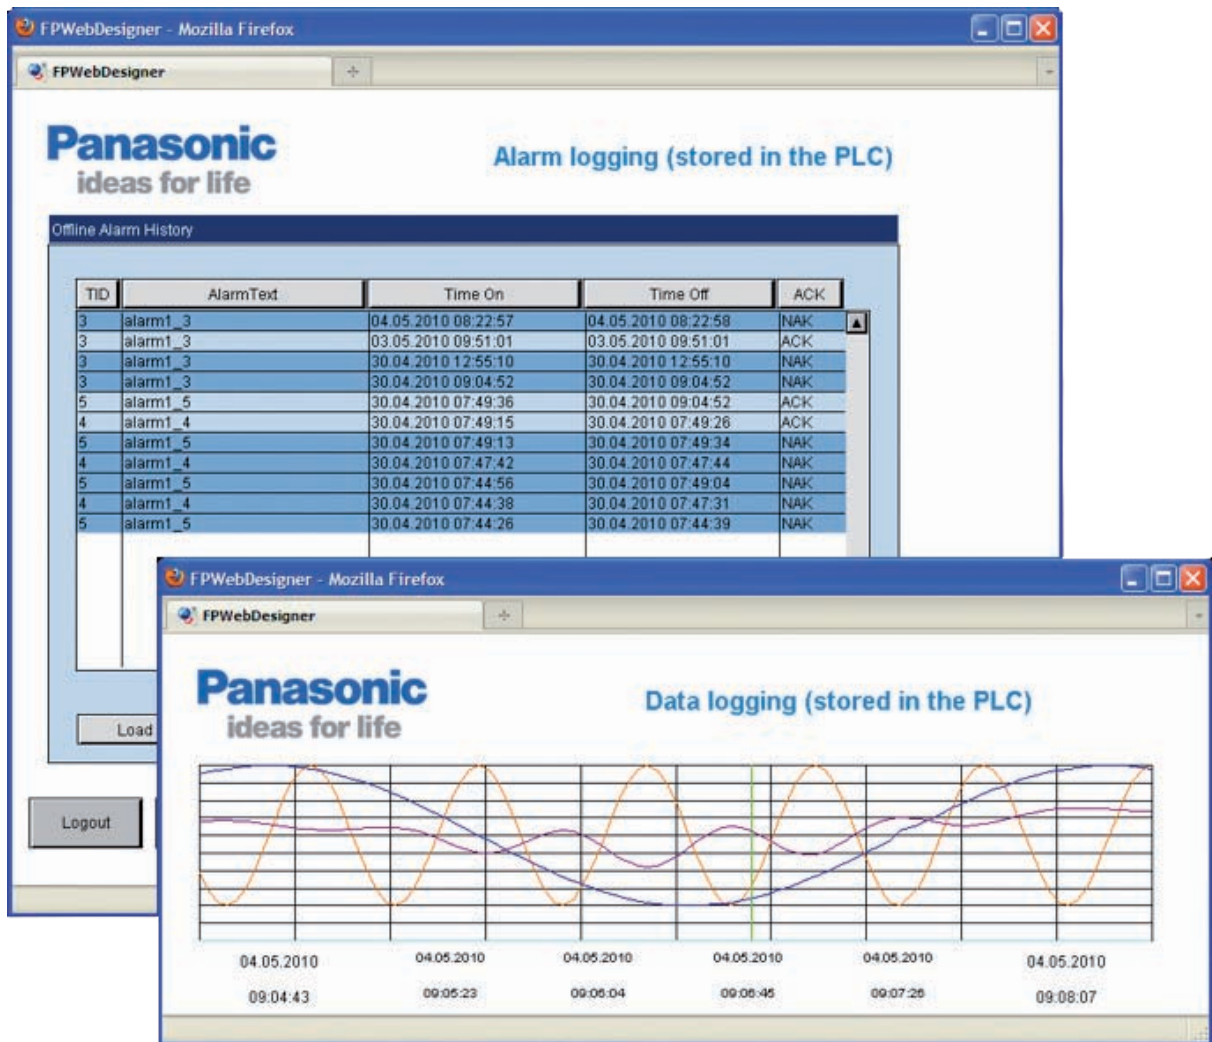

With the help of integrated macro functions in FP Web Designer, alarm reports and diagrams of measured values can be easily embedded into the designed graphic application.

Part number	Description	Comments
AFPS36510-E	FP Web Designer, economy edition	Limited for 250 process points, 15 views, 1 offline trend + 1 alarm
AFPS36510-B	FP Web Designer, basic edition	FP Web Designer, limited for 500 process points, 30 views, 3 offline trends+ 1 alarm
AFPS36510-X	FP Web Designer, extended edition	No limitation
AFPS36510-E2B	FP Web Designer, upgrade from economy to basic edition	-
AFPS36510-B2X	FP Web Designer, upgrade from basic to extended edition	-
AFPS36510-E2X	FP Web Designer, upgrade from economy to extended edition	-


Special features of the FP Modem-56k unit for industrial telecontrol:

- Very small size
- Operating voltage 24VDC
- Attachable to a 35mm DIN rail
- Maximum line speed up to 56kbit/s
- Leased line mode (pier-to-pier) up to 20km with 33.6kbit/s
- Multidrop leased line mode according to V.23 at 1200bps
- DCD output for connection to the digital input of a PLC
- PSTN text message send + receive (if supported by the PSTN)
- CLIP decoder for calling line identification and callback
- Serial communication interfaces RS232C and RS485 are built-in




Combining the FP Modem-56k with the FP Web-Server expands the horizon of telecontrol even more, e.g. internet access, send e-mails, dial up a FP Web-Server for local or network access, etc. User libraries, e.g. Panasonic CONTROL LIBRARY "MODEM" (NCL-CM-LIB), make the integration of communication functions into PLC programs easy.


Typical applications for FP Modem-56k:

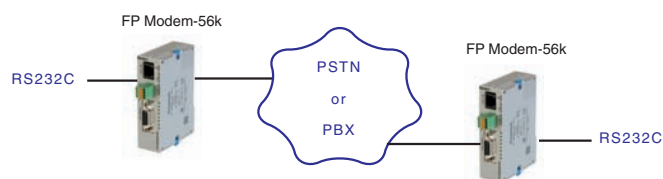

1. Dial-up mode

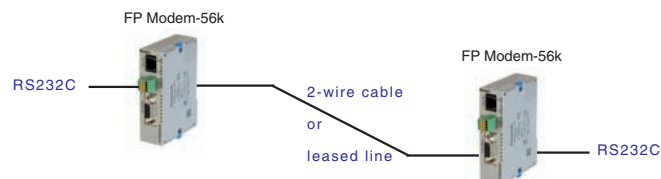

2. Leased-line mode

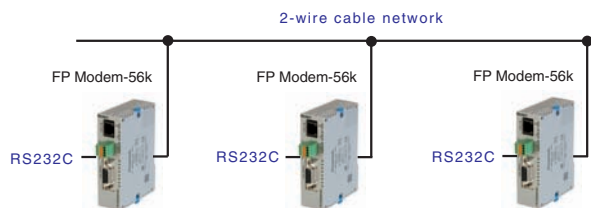

3. Multipoint mode

Specifications	
Part number	FP-MODEM-56k
Operating voltage	24VDC (10.8 to 26.6VDC)
Current consumption	Approx. 50mA
LEDs	Power, DCD (Carrier detect), RI (Ring), RTS (request to send), RxD, TxD (Data)
Ambient temperature	0 to +55°C
Connection to PLC, PC or FP Web-Server	RS232C (Sub-D 9-pin female), RS485 (Phoenix screw terminal)
Connection to the telephone network	RJ12 jack and RJ12 - RJ12 cable, national adapter is not enclosed
Carrier detect connection	Phoenix screw terminal
Error correction	V.42, LAPM, MNP
Data compression	V.42bis, V.44
Dialing method	Pulse dialing, tone dialing (DTMF)
Control / Operation	Extended AT command set, Hayes compatible (V.250)
Operation modes	Automatic selection, V.21, V.22, V.23, V.22bis, V.32, V.32bis, V.34, V.90, V.92
DTE speed (RS232C baud rate)	300, 600, 1200, 2400, 4800, 9600, 19200, 38,400, 57,600, 115,200 bps
Line transmission speed	Up to 56kbit/s with V.90
Compliance with standards	CE marking (ES-203021 approval), US approval (US: C04MM05B077FP)
Dimensions (WxHxD)	25 x 90 x 64mm

Fieldbus Master Units

The expansion Fieldbus Master Units (FMU) for FPΣ (Sigma) and FP2 PLCs are available for three bus systems: PROFIBUS, DeviceNet and CANopen. Others are planned for the future.

Advantages of the hardware:

- Up to 2 FMUs can be connected to FPΣ (Sigma) CPU. The number of FP2 FMUs is restricted by the size of the FP backplane and the power supply capacity
- One PLC hardware platform for several bus systems
- Gateway function between fieldbus types simply by connecting the corresponding expansion units to the same CPU

For each network type, free ready-made function libraries are available for the programming software Control FPGWIN Pro.

They also include a comprehensive online help and programming examples.



FPΣ FMU PROFIBUS:
FPG-DPV1-M

FPΣ FMU DeviceNet:
FPG-DEV-M

FPΣ FMU CANopen:
FPG-CAN-M

FP2 FMU PROFIBUS:
FP2-DPV1-M

FP2 FMU DeviceNet:
FP2-DEV-M

FP2 FMU CANopen:
FP2-CAN-M

Control Configurator FM is an add-on software for Control FPGWIN Pro and is used to configure and diagnose the FMUs.


Advantages of the software:

One configuration software for various fieldbus systems

- One-time cost, several network types
- Only one installation necessary

Integrated in the PLC programming software Control FPGWIN Pro

- No additional software required on the PC
- Bus-relevant global variables are automatically generated for the PLC program, preventing errors
- Fully integrated in the FPGWIN Pro project file, no separate files on PC

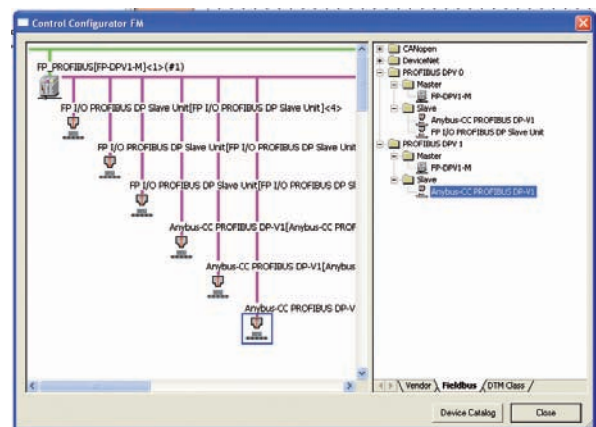

Part number: **AFPS35510**

FMU (Fieldbus Master Unit) features

Technical data	PROFIBUS	DeviceNet	CANopen
Bustype	RS485	CAN / ISO 11898	
Number of slaves	125	63	126
Number of process data	3584 bytes for inputs and 3584 bytes for outputs		
Bus length	100m (12Mbit/s) , 200m (1.5Mbit/s), 400m (500kbit/s), 1km (187.5kbit/s)	100m (500kbit/s), 250m (250kbit/s). 500m (100kbit/s)	40m (1Mbit/s), 500m (100kbit/s)
Connection types	DP-V0: process data is accessed from the PROFIBUS network as cyclical I/O data	<ul style="list-style-type: none"> • Cyclic connections • COS (Change of State) • Bit strobe connections • Polled connections • Explicit connections 	PDO (Process Data Object) exchange via: <ul style="list-style-type: none"> • Cyclic synchronous • Acyclic synchronous • COS (Change of State) • Timer-driven connections
Internal current consumption	FPG-DPV1-M: 135mA , FP2-DPV1-M: 450mA	FPG-DEV-M: 45mA, FP2-DEV-M: 150mA	FPG-CAN-M: 135mA, FP2-CAN-M: 450mA
Connector type	DB9F (9-pin Sub-D female)	5-pin terminal block	DB9F (9-pin Sub-D male)
Weight	FPG-DPV1-M: 95g, FP2-DPV1-M: 118g	FPG-DEV-M: 95g, FP2-DEV-M: 118g	FPG-CAN-M: 95g, FP2-CAN-M: 118g

High performance Fieldbus Slave Units

Powerful, compact, modular, high performance fieldbus slave units (FSU) are used together with the programmable controllers FPΣ (Sigma), FP2/FP2SH and FP0/FP0R.



3 simple steps to set up the network

1. Select network

2. Download free slave data

PROFIBUS DP	GSD file
DeviceNet	EDS file
CANopen	EDS file
PROFINET IO	GSDML file

Slave units for PROFIBUS DP
FP2-DPV1-S
FPG-DPV1-S

Slave unit for PROFIBUS DP (FP0/FP0R expansion unit also compatible with FP-X)
FP0-DPS2

Slave units for DeviceNet
FP2-DEV-S
FPG-DEV-S


Slave units for CANopen
FP2-CAN-S
FPG-CAN-S

Slave units for PROFINET IO
FP2-PRT-S
FPG-PRT-S

3. Download free, ready-made library PEW_FNS.sul

All the slave data files and ready-made function libraries can be downloaded free of charge from www.panasonic-electric-works.com

The function libraries are used for the programming software Control FPLIN Pro. They also include a complete online help file and programming examples.

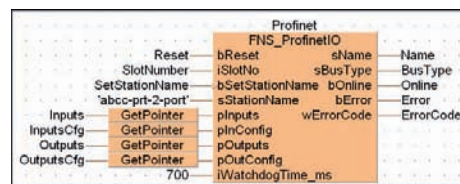


FSU (Fieldbus Slave Units) specifications:

Item	PROFIBUS DP	DeviceNet	CANopen	PROFINET IO
Part no..	FP2-DPV1-S, FPG-DPV1-S FP0-DPS2	FP2-DEV-S, FPG-DEV-S	FP2-CAN-S, FPG-CAN-S	FP2-PRT-S, FPG-PRT-S
Baud rate	• Automatic baud rate detection • 9.6kbaud to 12Mbaud	• Automatic baud rate detection • 125kbit/s to 500kbit/s	• Automatic baud rate detection • 10kbit/s to 1Mbit/s	• 100Mbit/s, full duplex (fixed)
Isolation	Galvanically isolated bus electronics	Galvanically isolated bus electronics	Galvanically isolated bus electronics	Galvanically isolated bus electronics
Connection types	DP-V0: process data is accessed from the PROFIBUS network as cyclical I/O data	• Cyclic connections • COS (Change of State) • Bit strobe connections • Polled connections • Explicit connections	PDO (Process Data Object) Exchange via: • Cyclic synchronous • Acyclic synchronous • COS (Change of state) • Timer-driven connections	PROFINET IO conformance class B Cyclic Data Exchange via PROFINET IO Real Time (RT) communication, 2ms cycle time
Maximum inputs / outputs	• 76 words altogether for inputs and outputs (in units of 1, 2 or 4 words) • FP0-DPS2: 6 words/6 words	E. g. for cyclic connections: 128 words in each direction	Data 128 words (for TPDOs and RPDOs)	128 words of real time IO data, in each direction
Additional features	Diagnostic support	• UCMM capable • CIP parameter object • Diagnostic support	Diagnostic support	Diagnostic support
Interface	DB9F (9-pin Sub-D female)	5-pin terminal block	DB9F (9-pin Sub-D male)	Integrated 2-port switch: 2 x RJ45 socket
Weight	FP2-DPV1-S: 119g FPG-DPV1-S: 92g FP0-DPS2: 80g	FP2-DEV-S: 120g FPG-DEV-S: 93g	FP2-CAN-S: 120g FPG-CAN-S: 93g	FP2-PRT-S: 119g FPG-PRT-S: 92g
Volume (WxHxD)	FP2-DPV1-S: 27.7x100x93mm FPG-DPV1-S: 30x90x60mm FP0-DPS2: 25x90x60mm	FP2-DEV-S: 27.7x100x93mm FPG-DEV-S: 30x90x60mm	FP2-CAN-S: 27.7x100x93mm FPG-CAN-S: 30x90x60mm	FP2-PRT-S: 27.7x100x93mm FPG-PRT-S: 30x90x60mm

FPWIN Pro is the Panasonic programming software developed according to the international standard IEC 61131-3 (for Windows® 2000/XP/Vista/7).

Type safe programming using simple or complex data types already supports 15 standardized data types


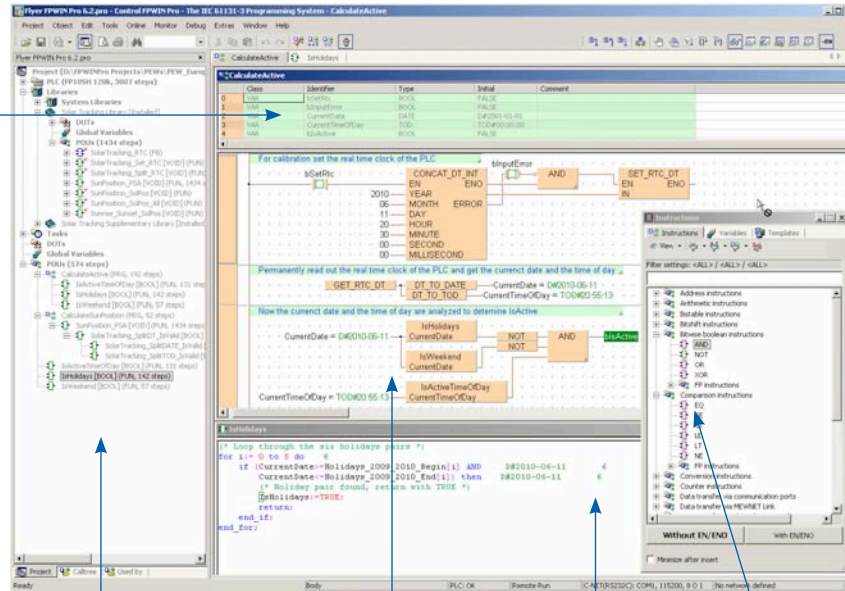


Navigator provides an overview even for very complex projects

Programming editor Ladder Diagram (LD)

Programming editor Structured Text (ST)

Selection of functions and variables



FPWIN Pro highlights

- One software for all FP series PLCs
- 5 programming languages: IL (Instruction List), LD (Ladder Diagram), FBD (Function Block Diagram), SFC (Sequential Function Chart), ST (Structured Text)
- 6 languages are fully supported: English, German, French, Italian, Spanish and Japanese
- Well-structured through program organization units, task and project management
- Remote programming, service and diagnostics via modem or Ethernet
- Extensive comments and online documentation created hand in hand with the program
- Minimum program size through optimized compiler
- Powerful debugging and monitoring tools provide information on the current status of the PLC
- Comprehensive printed documentation and support for function blocks and libraries help to get your hardware running in record time while maintaining rigorous quality standards
- Reuse of functions and function blocks saves time

Product	Part number
Control FPWIN Pro 6 full version (supports all FP series PLCs)	FPWINPRO6-FULL
Control FPWIN Pro 6 small version (supports FP-e, FP0, FPOR, FPΣ (Sigma), FP-X)	FPWINPRO6-SMALL
Control FPWIN Pro 6 Version-up full (upgrades the full version from Ver.3 or higher to Ver.6)	FPWINPROF6-UPGRADE
Control FPWIN Pro 6 Version-up small (upgrades the small version from Ver.3 or higher to Ver.6)	FPWINPROS6-UPGRADE

Ready-made Libraries	Part number:
Ethernet Library	NCL-ET1-LIB
Process and Temperature Control Library	NCL-PTC-LIB
Inverter Serial Communication Library	NCL-ISC-LIB
GSM Communication Library	NCL-CG-LIB
Modem Communication Library	NCL-CMEU-LIB
Motion Control Library	NCL-MC-LIB
Modbus Library, master and slave functionality	NCL-MODBUS-LIB
Control configurator MS open version	NCLCCMSLIB
Many other ready-made libraries including Master/Slave of PROFIBUS/DeviceNet/CANopen function blocks can be downloaded from www.panasonic-electric-works.com (download area)	

Standardized connection to SCADA/HMI software

The Panasonic OPC server allows high-performance data transfer between applications supporting the universally accepted OPC DA Standard (v1-v3) and Panasonic FP series PLCs.

The screenshot shows the 'Temperature Control - FP OPC Server' application window. It features a 'Navigator' pane on the left showing a tree structure of 'Const' and 'Temperature' elements. The main area displays a table of tag elements with columns for Name, Address, Data Type, Time Stamp, Access Right, and Description. Below this are a 'System Log' pane and a 'Server Status' pane.

Navigator pane shows the hierarchical structure of channel, device and tag group elements.

Tag pane shows the tag elements in a list structure. Multiple rows can be selected and changes applied to all selected elements.

System log pane displays information, warnings and error event messages.

Server status pane shows actual status information about the server application, e.g. server time, up time, connected clients and number of tags.

Features of the FP OPC server

- Modern and intuitive user interface allows you to configure the server. While creating the application, sophisticated user assistance and help is omnipresent.
- The server complies to the following OPC DA client/server technologies:
 - OPC DA 1.0a
 - OPC DA 2.05a
 - OPC DA 3.0
- The PLCs can be accessed via serial, modem and Ethernet communication lines.
- State-of-the-art import / export mechanism allows you to save, exchange or edit data in XML format. Data can also be exchanged with other Panasonic software products, e. g. FPWIN Pro, using a CSV file.
- An icon or tool tip notifies the user about possible errors in configuration.
- The FP OPC Server allows you to clearly structure your application, e.g. by grouping elements in meaningful hierarchies.
- Tolerant of interruptions: if a connected device stops responding, e. g. because the line is interrupted, the communication is carried on for the other connected devices.


Part number	
FP OPC Server software with one license	AFPS03510D

Read and display PLC data

The FP Data Analyzer is a software tool for acquisition, logic analysis and representation of recorded data on multiple channels connected to any Panasonic PLC. The software is a stand-alone tool. You need not install any other software to run the FP Data Analyzer.


The FP Data Analyzer can be connected to any Panasonic PLC by utilizing the integrated MEWNET Manager, for instance via any COM port. Recording and analyzing remote PLCs, sensors, actuators, etc. via LAN or modem is just a matter of seconds.

In addition, not only PLCs can be analyzed with the FP Data Analyzer! Via the integrated OLE interface, the P500 image processing software can also send samples to the analyzer.

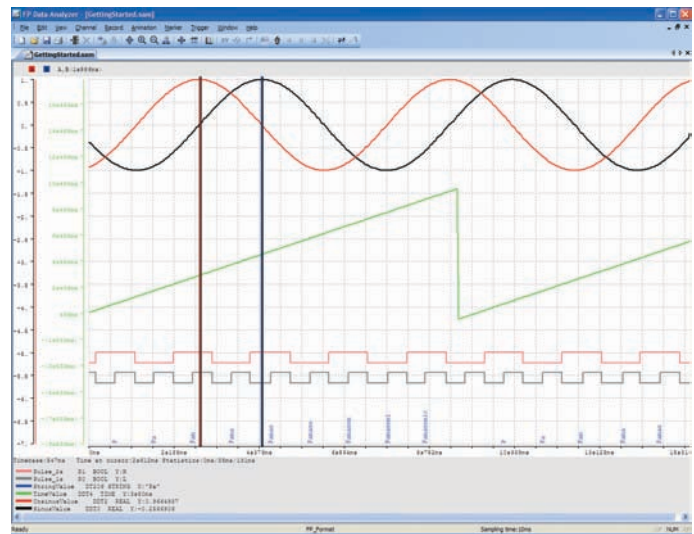

Features of the FP Data Analyzer

- LAN and modem connection for remote control via LAN, Internet or telephone line
- Concurrent data acquisition from several independent PLCs
- Acquisition of all internal and external PLC registers, relays, counters, timers, arrays and even DUTs
- Connection to P500 image processing software
- Data types can be recorded and displayed as: BOOL, INT, DINT, WORD, DWORD, REAL, STRING, ARRAY of type
- Adding new channels while recording
- Variable list compatible to FPWIN Pro GVL export
- Trigger functions with pre-trigger, post-trigger
- User-defined sampling rate from a few milliseconds to hours or even days
- Each channel can be displayed in any color and trace width
- Display signals graphically as single channels, in XY-mode or in tables
- Time measuring function with up to 4 markers plus 2 trigger markers
- Jump to time
- Jump to an analog value
- Virtually unlimited number of samples

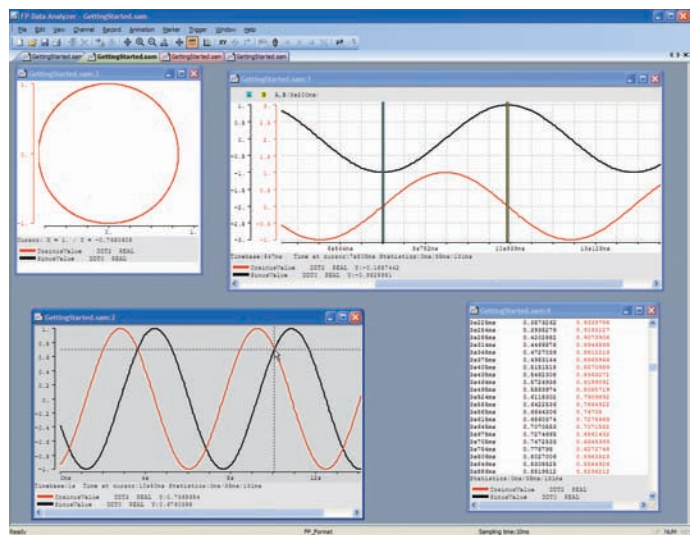

Part number

FP Data Analyzer software	AFPS04510D
---------------------------	------------

The connection in ActiveX[®] technology

Connecting your application to Panasonic PLCs

Main advantages:

- FP Connect provides One ActiveX control for Microsoft Foundation Classes (MFC), Microsoft.NET (Visual Basic and C#), Office applications and COM applications.
- No knowledge of Panasonic PLC communication protocol (MEWTOCOL) is needed for developing applications which communicate with Panasonic FP series PLCs, no matter which programming language is used: VB, C#, C, HTML, JavaScript, Delphi, etc.
- FP Connect provides many ready-to-use function sets for easy application development.

Control:

- AboutBox
- ShowParameter
- PortOpen
- PortClose
- AttachHostHandle
- ChangeTimeOut

PLC read:

- AreaRead
- ReadBits
- ReadINT
- ReadDINT
- ReadWORD
- ReadDWORD
- ReadREAL
- ReadICCard
- MonitorRead

PLC write:

- AreaWrite
- WriteBits
- WriteINT
- WriteDINT
- WriteWORD
- WriteDWORD
- WriteREAL
- WriteICCard
- WriteSharedMemory

Special commands:

- TransparentMode
- ReadPLCInformation
- ChangePLCMode
- PLC Password
- UploadPLCCode
- DownloadPLCCode

Specifications

- FP Connect available for all Windows operation systems
- Support multiple connections to Panasonic PLCs and HMIs with integrated MEWNET Manager
- Communicate with FP series PLCs using via interface such as RS232C, RS485, modem, Ethernet
- Read/Write PLC contacts, registers and shares memory
- Up and downloads of PLC programs and system registers
- Provides many high-level commands like ReadPLCInformation for easy data acquisition
- Display or change status of the PLC (RUN/PROG)
- Provide PLC password function

Part number	
Control FP Connect	AFPS37510

One tool for GTs and PLCs to transfer project data without having an engineering system

The system information, program and data from Panasonic GT-series and FP series can be uploaded with this software tool. The uploaded data can either be downloaded immediately to another GT or PLC of the same type or saved on disk for later usage.



GT features

- Read panel system information
- Upload project file
- Download project file
- Save panel project as single file
- Download firmware

PLC features

- Upload program and data
- Download program and data
- Register types and ranges of variables for up/download freely definable by user
- Include Flash & EEPROM data
- Save PLC project as single file

Part number	
FPGT loader	AFPS77510

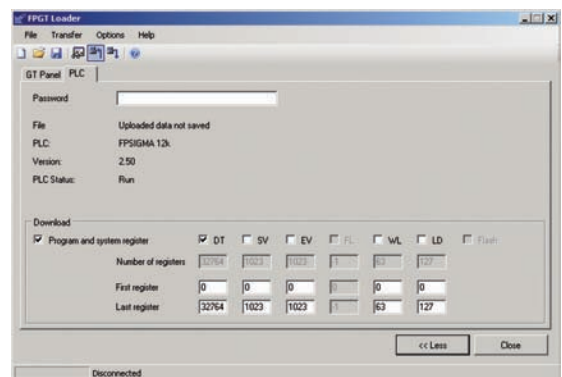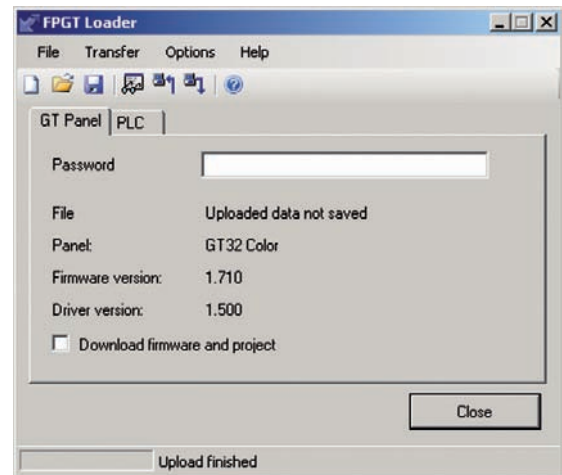


PCWAY data monitoring, logging and setting software based on Excel®

PCWAY is a unique add-in software for Microsoft Excel. With PCWAY, it is possible to display PLC data on an Excel sheet. Thereby animated visual displays are possible. It is also possible to display internal matters, such as accumulating data on a file, or a sound. A trigger, which can be a relay or an event, can be used to start such internal tasks. When the trigger changes from OFF to ON, the internal processing tasks start.

Features

- Real-time display of the PLC memory area in the Excel cell
- Changing the PLC memory area directly from the Excel cell
- Saving PLC data to a file and displaying the data saved
- Booting Excel macros automatically
By combining the macro with PCWAY, it is possible to automatically generate reports or to change the colors of the charts based on the PLC information
- E-mail function
PCWAY monitors internal relays of the PLC and sends the equipment status information to a PC or a cellular phone via e-mail when the internal relay changes from OFF to ON


Part number	
PCWAY software with USB port dongle	AFW10031
USB port dongle for PCWAY and CommX	AFW1033

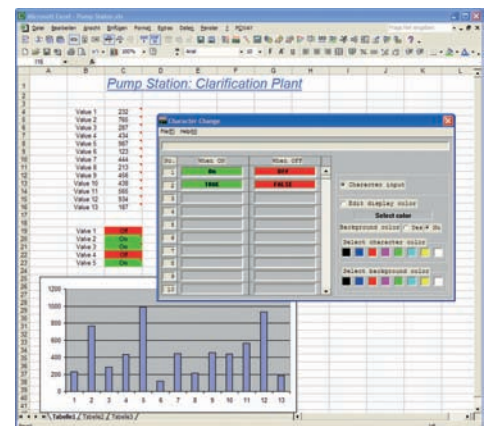

Signal converter for RS232C/RS485 <-> Ethernet

- Easy to connect
The connectors are located on the front panel
- Easy to configure
The IP address can easily be set by using the "Configurator WD" software
- Easy-to-install DIN-rail mountable type

System configurations example

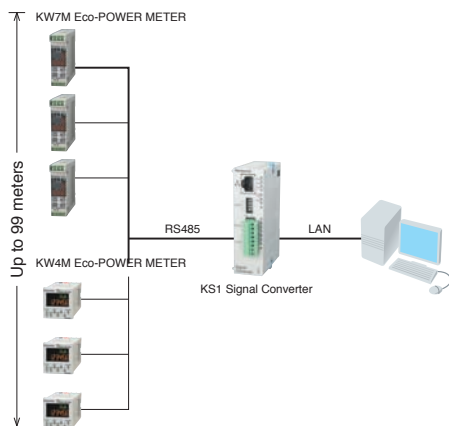

General specifications	
Part number	AKS1202
Rated voltage	24V DC
Operating voltage range	90 to 110%V of rated voltage (21.6 to 26.4 V DC)
Rush current	12A or less
Current consumption	200mA or less
Allowed momentary power off time	10ms
Fuse	Built-in type
Terminal screw	M2
Ambient temperature	0 to 55°C
Storage temperature	-20 to +75°C
Ambient humidity	30 to 85% RH (at 20°C, non-condensing)
Breakdown voltage	500V AC 1 minute
Insulation resistance	100MW or higher (500V DC using an insulation resistance meter)
Vibration resistance	10 to 55Hz, 1 cycle/min.: double amplitude of 0.75mm, 1 hour on 3 axes
Shock resistance	294m/s ² or more, 5 times on 3 axes
Dimensions (in mm)	25 x 60 x 90 (W x D x H)
Weight	Approx. 80g

Communication specifications interface: RS232C and RS485

Interface	RS232C (non insulated)	RS485 (insulated)
Conversion COM port	COM1	COM2
Communication style	1:1 communication	1:N communication
Number of connectable stations	1 station	99 stations max.
Communication method	Full duplex	Half duplex
Transmission distance	15m	Max. 1200m
Communication speed	2400, 4800, 9600, 19,200, 38,400, 57,600 and 115,200bit/s	
Number of connectable connections	3	3
COM receive time out	Setting range: 10ms to 60s	Setting range: 10ms to 60s
Non-communication time before disconnection	Setting range: 0 to 1800s	
Conversion and transmission format	Data length	8 bits fixed
	Parity	Odd/Even/None
	Stop bit	1 bit/2 bits
	End code	CR, CR+LF, None
Ethernetto Serial conversion	Command/Response system	

Communication Specifications Interface: Ethernet

Interface	IEEE802.3u, 10BASE-T/100BASE-TX	
Connector shape	RJ45	
Transmission specifications	Transmission speed	10Mbit/s/100 Mbit/s
	Transmission method	Base band
	Max. segment length	100 m
Communication cable	Category 5 UTP cable	
Protocol	TCP/IP	
Functions	Auto negotiation function, MDI/MDI-X, Auto crossover function	

FP-e control units

Description	Part number
FP-e control unit, 8 IN/6 OUT (5 NPN, 0.5A ; 1 relay, 2 A), RS232C, 24VDC	AFPE224300
FP-e control unit, 8 IN/6 OUT (5 NPN, 0.5A ; 1 relay, 2 A), RS485, 24VDC	AFPE224302
FP-e control unit, 8 IN/6 OUT (5 NPN, 0.5A ; 1 relay, 2 A), RS232C, RTC, 24VDC	AFPE224305
FP-e control unit, 6 IN/6 OUT (5 NPN, 0.5A ; 1 relay, 2 A;), plus 2 thermocouple input, RS232C, RTC, 24VDC	AFPE214325
FP-e control unit, 6 IN/6 OUT (5 NPN, 0.5A ; 1 relay, 2 A;), plus 2 thermocouple input, RS485, 24VDC	AFPE214322
FP-e control unit, 6 IN/6 OUT (5 NPN, 0.5A ; 1 relay, 2 A;), plus 2 analog input (0-20mA), RS232C, RTC	AFPE214325T06

FP-e option

Description	Part number
Backup battery	AFPG804
Rubber gasket	ATC18002
Panel cover (black) 20 pcs	AFPE803
Protective cover	AQM4803
Terminal socket set (4 terminal blocks)	AFPE804

FP0R control units

Description	Part number
FP0R C10 control unit, 16k steps, 6 IN/4 OUT relay(2A), screw terminal block , 24VDC	AFP0RC10RS
FP0R C10 control unit with RS232C , 16k steps, 6 IN/4 OUT relay (2A), screw terminal block, 24VDC	AFP0RC10CRS
FP0R C14 control unit, 16k steps, 8 IN/6 OUT relay (2A), screw terminal block , 24VDC	AFP0RC14RS
FP0R C14 control unit with RS232C, 16k steps, 8 IN/6 OUT relay (2A), screw terminal block, 24VDC	AFP0RC14CRS
FP0R C16 control unit, 16k steps, 8 IN/8 OUT (0.2A), MIL connector, 24VDC	AFP0RC16P (PNP) AFP0RC16T (NPN)
FP0R C16 control unit with RS232C, 16k steps, 8 IN/8 OUT (0.2A), MIL connector, 24VDC	AFP0RC16CP (PNP) AFP0RC16CT (NPN)
FP0R C32 control unit, 32k steps, 16 IN/16 OUT (0.2A), MIL connector, 24VDC	AFP0RC32P (PNP) AFP0RC32T (NPN)
FP0R C32 control unit with RS232C, 32k steps, 16 IN/16 OUT (0.2A), MIL connector, 24VDC	AFP0RC32CP (PNP) AFP0RC32CT (NPN)
FP0R T32 control unit with RS232C, 32k steps, 16 IN/16 OUT (0.2A), RTC, MIL connector, 24VDC	AFP0RT32CP (PNP) AFP0RT32CT (NPN)
FP0R F32 control unit with RS232C, 32k steps, 16 IN/16 OUT (0.2A), battery-less data backup, 24VDC	AFP0RF32CP (PNP) AFP0RF32CT (NPN)

FP Σ (Sigma) control units

Description	Part number
FPG-C24R2 control unit, 32k steps, 16 IN / 8 relay OUT, terminal block, 24VDC	FPG-C24R2H-A
FPG-C28P2 control unit, 32k steps, 16 IN/ 12 OUT transistor (PNP), MIL connector, 24VDC	FPG-C28P2H-A
FPG-C32T2 control unit, 32k steps, 16 IN/ 16 OUT transistor (NPN), MIL connector, 24VDC	FPG-C32T2H-A
FPG-C24R2TM control unit, 32k steps, 16 IN/ 8 relay OUT, plus 2 thermistor input, terminal block, 24VDC	FPGC24R2HTM
FPG-C28P2TM control unit, 32k steps, 16 IN/ 12 OUT transistor (PNP), plus 2 thermistor input, MIL connector, 24VDC	FPGC28P2HTM
FPG-C32T2TM control unit, 32k steps, 16 IN/ 16 OUT transistor (NPN), plus 2 thermistor input, MIL connector, 24VDC	FPGC32T2HTM

FP Σ (Sigma) serial communication cassettes/modules

Description	Part number
FPG-COM1 cassette, 1x RS232C (5 pin)	FPG-COM1-A
FPG-COM2 cassette, 2x RS232C (2x 3pin)	FPG-COM2-A
FPG-COM3 cassette, 1x RS485 (3 pin)	FPG-COM3-A
FPG-COM4 cassette, 1x RS232C (3 pin) and 1x RS485 (2 pin, 19.2 and 115.2kBaud)	FPG-COM4-A
FPG-COM4 cassette, 1x RS232C (3 pin) and 1xRS485 (2 pin, 2.4 and 9.6kBaud)	AFPG806T17
FPG-SDU module, 3x RS485 (5 pin), terminal block	AFPG951T34

Part number list

FP Σ (Sigma) option

Description	Part number
FPG-EM1 data memory expansion unit, 256k Words (512k Byte)	FPGEM1
Battery for FP Σ (Sigma)/FP-e and AX30/AX40 (CR2025/S5P)	AFPG804

FP Σ (Sigma) digital expansion units (left side)

Description	Part number
FPG-XY64D2P expansion, 32 IN/ 32 OUT transistor (PNP), MIL connector, 24VDC	FPG-XY64D2P-A
FPG-XY64D2T expansion, 32 IN/ 32 OUT transistor (NPN), MIL connector, 24VDC	FPG-XY64D2T-A

FP Σ (Sigma) analog expansion units (left side)

Description	Part number
FP Σ (Sigma) analog expansion, 4*16bit IN (0-10V; 0-20mA with 50 ohm resistance) and 4 12bit OUTPUT (0-10V, -10 to +10V; 4 to 20mA), MIL connector, 24VDC	FPGAD44D50
FP Σ (Sigma) expansion, 4*16bit IN (0-10V; 0-20mA with 250 ohm resistance) and 4 12bit OUTPUT (0-10V, -10 to +10V; 4 to 20mA), MIL connector, 24VDC	FPGAD44D250

FP Σ (Sigma) motion control

Description	Part number
FPG-PP11, 1-axis motion control unit with transistor outputs	FPGPP11
FPG-PP12, 1-axis motion control unit with line driver outputs	FPGPP12
FPG-PP21, 2-axis motion control unit with transistor outputs	FPGPP21
FPG-PP22, 2-axis motion control unit with line driver outputs	FPGPP22
FPG-PN2AN, 2-axis RTEX motion control unit	FPGPN2AN
FPG-PN4AN, 4-axis RTEX motion control unit	FPGPN4AN
FPG-PN8AN, 8-axis RTEX motion control unit	FPGPN8AN
RTEX configuration software	AFPS66510

FP0R/FP Σ (Sigma)/FP-X digital expansion units (right side)

Description	Part number
FP0-E8 expansion unit, 8 input, MIL connector, 24VDC	FP0-E8X
FP0-E8 expansion unit, 4 input / 4 relay output, terminal block, 24VDC	FP0-E8RS
FP0-E8 expansion unit, 8 relay output, terminal block, 24VDC	FP0-E8YRS
FP0-E8 expansion unit, 8 transistor output, MIL connector, 24VDC	FP0-E8YP (PNP), FP0-E8YT (NPN)
FP0-E16 expansion unit, 16 input, MIL connector, 24VDC	FP0-E16X
FP0-E16 expansion unit, 8 input / 8 relay output, terminal block, 24VDC	FP0-E16RS
FP0-E16 expansion unit, 8 input / 8 transistor output, MIL connector, 24VDC	FP0-E16P (PNP), FP0-E16T (NPN)
FP0-E16 expansion unit, 16 transistor output, MIL connector, 24VDC	FP0-E16YP (PNP), FP0-E16YT (NPN)
FP0-E32 expansion unit, 16 input / 16 transistor output, MIL connector, 24VDC	FP0-E32P (PNP), FP0-E32 (NPN)

FP0R/FP Σ (Sigma)/FP-X analog expansion units (right side)

Description	Part number
FP0 analog I/O unit, input 2 points (0-5V, -10 to +10V, 0 to 20mA); output 1 point (-10 to +10V, 0 to 20mA); resolution 12 bits, 24VDC	FP0-A21
FP0 A/D converter unit, analog input 8 points (0-5V, -10 to +10V, -100 to +100V, 0 to 20mA), resolution 12 bits, 24VDC	FP0-A80
FP0 D/A converter unit, analog output 4 points: FP0-A04V: -10 to +10V (12bits) FP0-A04I: 4 to 20 mA (12bits)	FP0-A04V FP0-A04I

FP0R/FP Σ (Sigma)/FP-X temperature units (right side)

Description	Part number
FP0 thermocouple unit, resolution: 0.1°C, 4 input channels	FP0TC4
FP0 thermocouple unit, resolution: 0.1°C, 8 input channels	FP0TC8
FP0 RTD unit, Pt100, Pt1000, Ni1000, 6 input channels (3-wire), -200°C to + 500°C, resolution 0.1°C	FP0RTD6

FP0R/FP Σ (Sigma) cables and accessories

Description	Part number
I/O cable with 10pin-MIL connector and 10 wires, set of two cables (1x blue, 1x white), 1m	AFP0521D
I/O cable with 10pin-MIL connector and 10 wires, set of two cables (1x blue, 1x white), 3m	AFP0523D
I/O cable with 10pin-MIL connector and 10 wires, set of two cables (blue), 1m	AFP0521BLUED
I/O cable with 10pin-MIL connector and 10 wires, set of two cables (blue), 3m	AFP0523BLUED
I/O cable with 10pin-MIL connector and 10 wires, set of two cables (orange),1m	AFP0521ORANGED
I/O cable with 10pin-MIL connector and 10 colored wires, set of two cables, 1m	AFP0521COLD
I/O cable with 10pin-MIL connector and 10 colored wires, set of two cables, 2m	AFP0522COLD
I/O cable with 40pin-MIL connector and 40 blue wires, 1m	AYT58403BLUED
I/O cable with 40pin-MIL connector and 40 blue wires, 3m	AYT58406BLUED
I/O cable with 40pin-MIL connector and 40 colored wires based on DIN 47100, 1m	AYT58403COLD
I/O cable with 40pin-MIL connector and 40 colored wires based on DIN 47100, 3m	AYT58406COLD
Power supply cable for FPWEB2, FP0R and FP Σ (Sigma), 1m	AFPG805J
Power supply cable for FP0/FP0R, FP Modem-56k, 1m	AFP0581J
Plastic plate to mount FP Σ (Sigma) units and expansion units on a panel, 10 pcs per set	AFP0811
Plastic plate to mount FP0 expansion units on a wall (including 10 pieces)	AFP0803
FP Σ (Sigma) high capacity battery holder. Battery CR123A is not included.	AFPG807
Backup battery for FP Σ (Sigma)	AFPG804
FP Memory Loader, data clear type	AFP8670
FP Memory Loader, data hold type	AFP8671
Wire-press socket, attaches to transistor output type. Maintenance part. (2 sockets per pack)	AFP0807
Multi-wire connector pressure contact tool for MIL connection	AXY52000

FP-X control units

Description	Part number
FP-X C14R control unit, 8 IN (24V DC) /6 OUT (2A relay), terminal block, 230V AC	AFPXC14R
FP-X C14RD control unit, 8 IN (24V DC) /6 OUT (2A relay), terminal block, 24V DC	AFPXC14RD
FP-X C14 control unit, 8 IN (24V DC) /6 OUT (transistor, 0.5A), terminal block, 230V AC	AFPXC14P (PNP), AFPXC14T (NPN)
FP-X C14 control unit, 8 IN (24V DC) /6 OUT (transistor, 0.5A), terminal block, 24V DC	AFPXC14PD (PNP), AFPXC14TD (NPN)
FP-X C30R control unit, 16 IN (24V DC) /14 OUT (2A relay), terminal block, 230V AC	AFPXC30R
FP-X C30R control unit, 16 IN (24V DC) /14 OUT (2A relay), terminal block, 24V DC	AFPXC30RD
FP-X C30 control unit, 16 IN (24V DC) /14 OUT (transistor, 0.5A), terminal block, 230V AC	AFPXC30P (PNP), AFPXC30T(NPN)

FP-X control units

Description	Part number
FP-X C60R control unit, 32 IN (24V DC) / 28 OUT (2A relay), terminal block, 230V AC	AFPXC60R
FP-X C60R control unit, 32 IN (24V DC) / 28 OUT (2A relay), terminal block, 24V DC	AFPXC60RD
FP-X C60 control unit, 32 IN (24V DC) /28 OUT (transistor, 0.5A), terminal block, 230V AC	AFPXC60P (PNP), AFPXC60T (NPN)
FP-X C60 control unit, 32 IN (24V DC) /28 OUT (transistor, 0.5A), terminal block, 24V DC	AFPXC60PD (PNP), AFPXC60TD (NPN)

Part number list

FP-X expansion units

Description	Part number
FP-X E16R expansion unit, 8 IN (24V DC) / 8 OUT (2A relay), terminal block	AFPXE16R
FP-X E16 expansion unit, 8 IN (24V DC) / 8 OUT (transistor, 0.5A), terminal block	AFPXE16P (PNP), AFPXE16T (NPN)
FP-X E16X expansion unit, 16 IN (24V DC), terminal block	AFPX-E16X
FP-X E14YR expansion unit, 14 OUT (2A relay), terminal block	AFPX-E14YR
FP-X E30R expansion unit, 16 IN ((24V DC) / 14 OUT(2A relay), terminal block, 230V AC	AFPXE30R
FP-X E30RD expansion unit, 16 IN (24V DC) / 14 OUT(2A relay), terminal block, 24V DC	AFPXE30RD
FP-X E30 expansion unit, 16 IN (24V DC) / 14 OUT (transistor, 0.5A), terminal block, 230V AC	AFPXE30P (PNP), AFPXE30T (NPN)
FP-X E30 expansion unit, 16 IN (24V DC) / 14 OUT (transistor, 0.5A), terminal block, 24V DC	AFPXE30PD (PNP), AFPXE30TD (NPN)
Adapter for connecting FP0 expansion units, 24V DC	AFPXEFP0

FP-X add-on cassettes

Description	Part number
FP-X I/O cassette, 4 IN (24 V DC) / 4 OUT (NPN, 0.3A), terminal block	AFPX-IN4T3
FP-X input cassette, 8 IN (24V DC), terminal block	AFPXIN8
FP-X output cassette, 6 OUT (PNP, 0.5A), terminal block	AFPXTR6P (PNP)
FP-X output cassette, 8 OUT (NPN, 0.3A), terminal block	AFPXTR8 (NPN)
FP-X pulse I/O cassette, HSC input (single-phase 2 ch., each 80 kHz or two-phase 1ch., 30 kHz, Pulse output: one axis 100kHz/ch. cannot be used with a transistor output control unit.	AFPXPLS
FP-X analog input cassette, 2 inputs (0-10V or 0-20mA, 12-bit, 2ms/2ch.)	AFPXAD2
FP-X analog output cassette, 2 outputs (0-10V or 0-20mA, 12-bit, 2ms/2ch.)	AFPXDA2
FP-X analog I/O cassette, 2 ch. inputs (0-10V or 0-20mA, 12-bit, 2ms/2ch.), 1 ch. output (0-10V or 0-20mA, 12bit, 1ms/ch) (insulated)	AFPX-A21
FP-X thermocouple input cassette, 2-point thermocouple input, K/J type, -50°C to +500°C, resolution 0.2°C, 200 ms/2 ch. (insulated)	AFPX-TC2
FP-X RTD cassette, 2-point RTD input, PT100, -200°C to +850°C, resolution 0.1°C	AFPX-RTD2
FP-X master memory cassette with a real-time clock	AFPXMRTC
FP-X COM1 communication cassette, 1ch. RS232C (5 pin)	AFPXCOM1
FP-X COM2 communication cassette, 2ch. RS232C (2x3 pin)	AFPXCOM2
FP-X COM3 communication cassette, 1ch. RS485 (3 pin)	AFPXCOM3
FP-X COM4 communication cassette, 1ch. RS232C (3 pin) and 1ch. RS485 (2 pin)	AFPXCOM4
FP-X COM5 communication cassette, 1ch. Ethernet (10Base-T, 100Base-TX) and 1ch. RS232C (3 pin)	AFPXCOM5
FP-X COM6 communication cassette, 2x RS485, 115.2 kbit/s	AFPXCOM6
Control Configurator WD, tool software for setting the Ethernet port of the COM5 communication cassette	Free to download from our homepage

FP-X options

Description	Part number
FP-X backup battery for backing up the operation memory and real-time clock	AFPXBATT
FP-X expansion cable	AFPXEC08 (8 cm), AFPXEC30 (30cm), AFPXEC80 (80cm)
FP-X terminal block for C30, C60 and E30, 21 pins, cover with no marking, set of 5 pcs.	AFPXTAN1

24VDC power supply units

Description	Part number
Power supply unit (24V DC, 0.7A), short-circuit proof	FPOPSA2
Power supply unit (24V DC, 2.1A), short-circuit proof	FPPS24050ED

FP0R/FP Σ (Sigma)/FP-X network communication

Description	Part number
FP Web-Server 2, Ethernet with 10/100MBit/s and Modem interface	FPWEB2
IEC license for FPWEB2	IEC60870LIS
Control FP WEB configurator tool version 2	FPWEBTOOL2D
FP Web Designer, economy version	AFPS36510-E
FP Web Designer, basic version	AFPS36510-B
FP Web Designer, extended version	AFPS36510-X
FP Web Designer, upgrade from economy to basic version	AFPS36510-E2B
FP Web Designer, upgrade from economy to extended version	AFPS36510-E2X
FP Web Designer, upgrade from basic to extended version	AFPS36510-B2X
Connection cable from FP series PLC's tool port to FPWEB2, 2m	AIGT8192
FP Σ (Sigma) PROFIBUS DP master unit	FPG-DPV1-M
FP Σ (Sigma) DeviceNet master unit	FPG-DEV-M
FP Σ (Sigma) CANopen master unit	FPG-CAN-M
Control configurator FM for fieldbus master units	AFPS35510
FP Σ (Sigma) PROFIBUS DP slave unit	FPG-DPV1-S
FP Σ (Sigma) DeviceNet slave unit	FPG-DEV-S
FP Σ (Sigma) CANopen slave unit	FPG-CAN-S
FP Σ (Sigma) PROFINET IO slave unit	FPG-PRT-S
FP0/FP0R PROFINET DP slave unit, or works as remote IO unit without controller	FP0DPS2D
MEWNET-F slave unit	FP0IOL
FP Σ (Sigma) S-Link master unit as expansion	FPGSL
FP Σ (Sigma) CC-Link slave unit as expansion	FPGCCL
C-NET Adapter (RS232C/RS422), 100-240VAC	AFP8536CEJ
C-NET module (RS485) S2-Type, 30 cm cable for FP0/FP Σ (Sigma)/FP2 Tool port	AFP15402J
Communication cable, FP series PLC Com port to FP2/2SH Com port / FP C-Net adapter, 2m	AIP81842D
Programming cable for FP and GT series (9-pin SUB-D to 5-pin miniDIN), L type, 3m	AFC8513D
FP Modem-56k (56kBaud, V.23/V.32bis/V.34/V.90, RS232/RS485)	FP-modem-56k
RS232C cable for FP Modem-56k/FP-Safe <---> FP series PLC COM port (3 pins), 0.5m	CABMODPLC111D
RS232C cable for FP Modem-56k/FP-Safe <---> FP series PLC COM port (9 pins), 0.5m	CABMODPLC211D
RS232C cable for FP Modem-56k/FP-Safe <---> FP series PLC tool port (5 pins), 2m	CABMODPLC311D
RS232C cable for FP Modem-56k/FP-Safe <---> FP series PLC tool port (5 pins), 0.5m	AFS8TP
KS1 signal converter, Ethernet <--> RS232C/RS485, 24VDC	AKS1202

FP2/FP2SH control units (built-in RAM)

Description	Part number
FP2 controller unit with COM port , 16k steps, battery included	FP2C1J
FP2 controller unit with 64-point input and COM port, 16k steps, battery included	FP2C1DJ
FP2 controller unit with 2x S-Link interface and COM port, 16k steps, battery included	FP2C1SLJ
FP2SH controller unit with COM port, 60k steps, RTC, battery included	FP2C2J
FP2SH controller unit with COM port, 60k steps, IC memory card interface, RTC, battery included	FP2C2PJ
FP2SH controller unit with COM port, 120k steps, IC memory card interface, RTC, battery included	FP2C3PJ

Part number list

FP2 optional memory

Description	Part number
Expansion memory unit, comment input, RTC	FP2EM1J
Expansion memory unit, comment input, RTC and 16k steps RAM	FP2EM2J
Expansion memory unit, comment input, RTC and 16k steps RAM, ROM socket	FP2EM3J
F-ROM for program copy and ROM operation	FP2EM4J
EPROM for program storage and ROM operation	FP2EM5J
ROM socket and 16k-steps RAM	FP2EM6J
Expansion memory unit , ROM socket for FP2 and FP2SH	FP2EM7J

FP2H optional memory

Description	Part number
Expansion memory unit, ROM socket for FP2 and FP2SH	FP2EM7J
F-ROM for program copy and ROM operation	AFP5208
EPROM for program storage and ROM operation	AFP5209
IC memory card, F-ROM, 2MB	AIC50020
IC-card memory card, 2MB, SRAM	AFP2209

FP2/FP2SH backplane

Description	Part number
Conventional type, 5-module type (for basic)	FP2BP05
Conventional type, 7-module type (for basic and expansion)	FP2BP07
Conventional type, 9-module type (for basic and expansion)	FP2BP09
Conventional type, 12-module type (for basic and expansion)	FP2BP12
Conventional type, 14-module type (for basic and expansion)	FP2BP14
FP2 expansion cable, 0.6m	FP2ECJ
FP2 expansion cable, 2m	FP2EC2J
H type 8 slots (for basic)	FP2-BP11MH
H type 8 slots (for expansion)	FP2-BP10EH

FP2/FP2SH power supply unit

Description	Part number
FP2 power supply unit, input: 100 to 120VAC, output: 2.5A	FP2PSA1J
FP2 power supply unit, input: 200 to 240VAC, output: 2.5A	FP2PSA2J
FP2 power supply unit, input: 100 to 240VAC, output: 5A	FP2PSA3J
FP2 power supply unit, input: 24 VDC, output: 5A	FP2PSD2J

FP2/FP2SH analog expansion unit

Description	Part number
FP2 analog output unit, 4 ch. resolution 12 bits, (-10V to +10V/0...20mA)	FP2DA4J
FP2 analog input unit, 8 ch. resolution 13-16 bits, (+-10V, PT100, PT1000)	FP2AD8X
FP2 analog input unit, 8 ch. resolution 13-16 bits, (4 to 20mA, -10V to +10V)	FP2AD8VIJ
FP2 analog RTD input unit, 8 ch. PT100/PT1000	FP2RTDJ

FP2/FP2SH digital I/O expansion unit

Description	Part number
FP2 DUMMY UNIT	FP2DMJ
FP2 input unit, 16 IN (12-24VDC)	FP2X16D2J
FP2 input unit, 32 IN (12-24VDC)	FP2X32D2J
FP2 input unit, 64 IN (12-24VDC)	FP2X64D2J
FP2 output unit, 6 OUT relay, 5A 250V AC(10A/common), 5A 30V DC(10A/common)	FP2Y6RJ
FP2 output unit, 16 OUT relay, 2A 250V AC (5A/common), 2A 30V DC (5A/common)	FP2Y16RJ
FP2 output unit, 16 OUT transistor, 0.5A (12-24V DC), 0.1A (5V DC)	FP2Y16PJ (PNP), FP2Y16TJ (NPN)
FP2 output unit, 32 OUT transistor, 0.1A (12-24V DC), 50 mA (5V DC)	FP2Y32PJ (PNP), FP2Y32TJ (NPN)
FP2 output unit, 64 OUT transistor, 0.1A (12-24V DC), 50 mA (5V DC)	FP2Y64PJ (PNP), FP2Y64TJ (NPN)
FP2 I/O unit, 32 IN (24V DC), 32 OUT transistor, 0.1A (12-24V DC), 50 mA (5V DC)	FP2XY64D2PJ (PNP), FP2XY64D2TJ (NPN)
FP2 I/O unit, 32 IN (24V DC), 32 OUT transistor, 0.1A (12-24V DC), 50 mA (5V DC), with on pulse catch input	FP2XY64D7PJ (PNP), FP2XY64D7TJ (NPN)

FP2/FP2SH positioning unit, high-speed counter and pulse I/O unit

Description	Part number
FP2 positioning unit multifunction type, transistor output, 2 axes, independent	FP2PP21J
FP2 positioning unit multifunction type, line drive output, 2 axes, independent	FP2PP22J
FP2 positioning unit multifunction type, transistor output, 4 axes, independent	FP2PP41J
FP2 positioning unit multifunction type, line drive output, 4 axes, independent	FP2PP42J
FP2 positioning unit RTEX, network type, 2 axes	FP2PN2AN
FP2 positioning unit RTEX, network type, 4 axes	FP2PN4AN
FP2 positioning unit RTEX, network type, 8 axes	FP2PN8AN
Software RTEX Control configurator PM	AFPS66510
FP2 positioning unit, interpolation type, transistor output, 2 axes (linear/circular, synchronization)	FP2-PP2T
FP2 positioning unit, interpolation type, transistor output, 4 axes (2 axes linear/ 2 axes circular, 3 axes helical interpolation, 2 axes synchronization)	FP2-PP4T
FP2 positioning unit, interpolation type, line drive output, 2 axes (linear/circular, synchronization)	FP2-PP2L
FP2 positioning unit, interpolation type, line drive output, 4 axes (2 axes linear/ 2 axes circular, 3 axes helical interpolation, 2 axes synchronization)	FP2-PP4L
FP2 high-speed counter unit, 8 interrupt inputs, 4-channel HSC, 8 comparison outputs, input: 24 VDC, output: 5 to 24 VDC (0.1A, 12 points/0.8A, 4 points)	FP2HSCT (NPN) FP2HSCTP (PNP)
FP2 pulse I/O unit, 8 interrupt inputs, 4-channel HSC, 8 comparison outputs, 4 pulse output channels, 4 PWM output channels, input: 24 VDC, output: 5 to 24 VDC (0.1A, 12 points/0.8A, 4 points)	FP2PXYTJ (NPN) FP2PXYPJ (PNP)

FP2/FP2SH cables and accessories

Description	Part number
FP2 connector set - loose wiring pressure	AFP2801J
FP2 connector set - flat cable socket	AFP2802J
I/O cable with 40pin-MIL connector and 40 blue wires, 1m	AYT58403BLUED
I/O cable with 40pin-MIL connector and 40 blue wires, 3m	AYT58406BLUED
I/O cable with 40pin-MIL connector and 40 colored wires based on DIN 47100, 1m	AYT58403COLD
I/O cable with 40pin-MIL connector and 40 colored wires based on DIN 47100, 3m	AYT58406COLD
Battery for FP2, button type battery, CR2450 or equivalent	AFC8801
Battery for FP2SH CPU unit, battery with cable	AFP8801

FP Memory loader

Description	Part number
FP Memory loader, data non-hold type	AFP8670
FP Memory loader, data hold type	AFP8671

Part number list

FP2/FP2SH network communication

Description	Part number
FP2SH VE-link unit, MEWNET-VE Link unit (VE mode and FL-net mode) using Ethernet cable (10BaseT)	FP2-VE2
FP2 ET-LAN unit, Ethernet LAN (10BaseT, 100BaseT, TCP/IP, UDP/IP, MEWTOCOL)	FP2-ET2
Ethernet configurator software for ET-LAN	AFPS32510J
FP2 multi-wire link unit, compatible with MEWNET-W/MEWNET-W2, can connect as the remote I/O system MEWNET-F master station	FP2MWJ
FP2 multi-communication unit, up to two blocks to be attached (RS485/ RS232C/ RS422 blocks, ASCII-MEWTOCOL. COM/DAT)	FP2MCU
FP2 RS232C communication block for FP2MCU, 300 to 230,400bps, 15m max.	FP2CB232
FP2 RS422 communication block for FP2MCU, 300 to 230,400bps, 1200m max.	FP2CB422
FP2 RS485 communication block for FP2MCU, 300 to 230,400bps, 1200m	FP2CB485
FP2 S-Link unit, 128 points per one unit	FP2SL2J
FP2 computer communication unit, for 1:1 communication between FP2 and a computer, RS232C x 2ch. connection with a control panel is also possible	FP2CCU
FP2 serial data unit, for communication with general-purpose RS232C devices	FP2SDU
FP2 PROFIBUS DP Master unit	FP2-DPV1-M
FP2 DeviceNet Master unit	FP2-DEV-M
FP2 CANopen Master unit	FP2-CAN-M
Control configurator FM for fieldbus master units	AFPS35510
FP2 PROFIBUS DP slave unit	FP2-DPV1-S
FP2 DeviceNet slave unit	FP2-DEV-S
FP2 CANopen slave unit	FP2-CAN-S
FP2 PROFINET IO slave unit	FP2-PRT-S
FPWEB2 (see page.57)	
FP-Modem-56k (see page 57)	

Control FPWIN Pro

Description	Part number
Control FPWIN Pro programming software, version 6, full version for all FP series PLCs	FPWINPRO6-FULL
Control FPWIN Pro programming software, version 6, small version (not useful for FP2/FP2SH)	FPWINPRO6-SMALL
FPWIN PRO upgrade to full version 6	FPWINPROF6-UPGRADE
FPWIN PRO upgrade to small version 6	FPWINPROS6-UPGRADE
Ethernet Library	NCL-ET1-LIB
Process and Temperature Control Library	NCL-PTC-LIB
Inverter Serial Communication Library	NCL-ISC-LIB
GSM Communication Library	NCL-CG-LIB
Modem Communication Library	NCL-CMEU-LIB
Motion Control Library	NCL-MC-LIB
Modbus library, master and slave functionality	NCL-MODBUS-LIB
Control Configurator MS open version	NCLCCMSLIB
More ready-made libraries are available for download from internet: www.panasonic-electric-works.com	-
More application specific ready-made libraries are available, please contact our sales and support team: Contact information: www.panasonic-electric-works.com	Example: telecontrol
Programming cable (FP0R/FP0/FP-e/FPG/FPX/FP2 Tool port to PC) miniDIN5 to SUB-D9; 2m	AFC8513D
Cable with USB 1.1 to RS232 with sub-D9 converter; 2m	CABUSBSER9D
Programming cable: USB A to USB B, 2m	AFPXCABUSB2D
Programming cable, USB A- mini USB B (5pin), 2m, USB2.0 compatible	CABMINIUSB5D

Other software products

Description	Part number
FPWEB Configurator Tool ver.2	FPWEBTOOL2
FP Web Designer, economy edition – HTML visualization for FPWEB2, limited for 250 process points, 15 views, 1 offline trend+ 1 alarm	AFPS36510-E
FP Web Designer, basic edition – HTML visualization for FPWEB2, limited for 500 process points, 30 views, 3 offline trends+ 1 alarm	AFPS36510-B
FP Web Designer, extended edition – HTML visualization for FPWEB2, no limitation	AFPS36510-X
FP Web Designer, upgrade from economy edition to basic edition	AFPS36510-E2B
FP Web Designer, upgrade from economy edition to extended edition	AFPS36510-E2X
FP Web Designer, upgrade from basic edition to extended edition	AFPS36510-B2X
Control Configurator FM for Fieldbus Master Units	AFPS35510
Control Configurator MS, Setup software for alarm message system based on FP0	AFPS34610D
Configurator ET, for FP2-ET2	AFPS32510D
Control Configurator WD for Ethernet configuration DLU, GT32T1, AFPX-COM5 and KS1, free download from www.panasonic-electric-works.com/peweu/en/html/	Control Configurator WD
Configurator for switching FP0R mode to FP0 mode, free download from internet	Configurator FP0R mode <-> FP0 mode
FP OPC Server	AFPS03510D
FP Data Analyzer, monitoring software for all FP series PLCs	AFPS04510
PCWAY software + USB port dongle: Data monitoring in Excel format	AFW10031J
USB port dongle for PC Way software	AFW1033J
FP GT loader: up/download all programs and data from FP series PLCs and GT panels	AFPS77510
FP Connect software: One ActiveX control for MFC, Visual Basic and C#, Office applications and COM applications to communicate with FP series PLCs	AFPS37510

Connection technology: UM connector terminal

Description	Part number
UM connector – terminal without LED (8 I/O connection to PLC, via flat cable to FP0/FP0R/FPG)	UM45-FLK14PLC
UM connector – terminal with LED (8 I/O connection to PLC, via flat cable to FP0/FP0R/FPG)	UM45-FLK14LAPLC
Flat cable with connector, UM (14 pins) <-> FP0/FP0R/FPG input connector (10 pins)	CABUM45005X (0.5m), CABUM4501X (1m), CABUM4503X (3m)
Flat cable with connector, UM (14 pins) <-> FP0/FP0R/FPG output connector (10 pins)	CABUM45005Y (0.5m), CABUM4501Y (1m), CABUM4503Y (3m)

Connection technology: PLC relay terminal

Description	Part number
PLC relay terminal with 8 relays (changeover contact with screw terminal) for connecting to FP-series PLCs	PLC-BSC
Flat cable with connector, PLC-BSC (14 pins) <-> FP0/FP0R (10 pins), 1m	CABPLCBSC01
Flat cable with connector, PLC-BSC (14 pins) <-> FP0/FP0R (10 pins), 3m	CABPLCBSC03
Relay terminal with 8 relays (changeover contact with screw terminal) for connecting to FP-series PLCs	AFPRT8
Flat cable with connector, AFPCT10PINS/AFPRT8 (10 pins) <-> FP0/FPG I/O (10 pins), 1m	CABAFPCT10PINS
FP0-RT80-6A, relay terminal with 8 relays AC250V/6A, MC connector	FP0-RT8Y-6A

Connection technology: MMFP power relay terminal

Description	Part number
Power relay unit, 32 relays (24 VDC, switching current 10A), connection via 40-pin header	MMFP30R
Flat cable with connector, MMFP30R <-> PLC, 40 pins, 1m	FC40FF/1

Please refer to connection technology catalog for details.

Part number list

Connection technology: MF connector terminal

Description	Part number
MF20 connector terminal (20 screw terminal connection using 20-pin header)	MF20MD
MF40 connector terminal (40 screw terminal connection using 40-pin header)	MF40MD
Flat cable with connector, MF40MD <-> PLC, 40 pins, 1m	FC40FF/1
Flat cable with connector, AFPRT8/AFPCT10PINS <-> PLC, 40 pin via 4x 10 pin, 1m	AFP0541
Flat cable with connector, MF20MD <-> FP0-PLC, 20 pins via 2x10 pin, 1m	CFP0-I
Connector terminal with LED (8 connection via flat cable to FP0/FPG)	AFPCT10PINS
Flat cable with connector, AFPCT10PINS/AFPRT8 (10 pins) <-> FP0/FPG I/O (10 pins), 1m	CABAFPCT10PINS

Connection technology: RT3 relay terminal

Description	Part number
RT3S relay terminal with 4 exchangeable relays, 24VDC coil, screw terminal, max. switching power: 30VDC, 250VAC, 2A	RT3S24J
RT3S PhotoMOS relay terminal with 4 exchangeable relays, 24VDC coil, screw terminal, max. switching power: 30VDC, 2A	RT3SP124J
RT3S PhotoMOS relay terminal with 4 exchangeable relays, 24VDC coil, screw terminal, max. switching power: 30VDC, 250VAC, 0.3A	RT3SP224J

FP-Safe, safety solution for FP-series PLCs

Description		Part number
FP-Safe controller, 16 redundant digital Inputs, 4 redundant outputs (PNP) and 3 freely configurable outputs (PNP), spring terminal, 24VDC	5.20 x 10 ⁻⁹	AFSC1605
FP-Safe controller with relay expansion unit, 16 redundant digital Inputs, 4 redundant outputs (PNP) and 3 configurable outputs (PNP), 4 safety relay outputs (each contains 2 redundant contacts and 1 signaling contact), spring terminal, 24VDC	1.04 x 10 ⁻⁸	AFSCR1613
FP-Safe controller with transistor I/O expansion unit, 24 redundant digital inputs, 4 redundant outputs (PNP), 13 freely configurable outputs (PNP), spring terminal, 24VDC	9.46 x 10 ⁻⁹	AFSCP2410
FP-Safe controller with Motion Monitoring Unit, 22 redundant digital inputs, 2 inputs for 2 incremental measuring systems, 4 redundant and 7 freely configurable outputs (PNP), spring terminal, 24VDC	9.46 x 10 ⁻⁹	AFSCM2207
FP-Safe controller with Relay and Motion Monitoring Unit, 22 redundant digital inputs, 2 inputs for 2 incremental measuring systems, 4 redundant and 7 freely configurable outputs (PNP), 4 safety relay outputs, spring terminal, 24VDC	1.47 x 10 ⁻⁸	AFSCRM2215
FP-Safe controller with transistor I/O expansion and motion monitoring unit, 30 redundant digital inputs, 2 inputs for 2 incremental measuring systems, 4 redundant and 17 freely configurable outputs (PNP), spring terminal, 24VDC	1.37 x 10 ⁻⁸	AFSCPM3012
FP-Safe controller with relay expansion unit and transistor I/O expansion unit, 24 redundant digital inputs, 4 redundant and 13 freely configurable outputs (PNP), 4 safety relay outputs, spring terminal, 24VDC	1.47 x 10 ⁻⁸	AFSCR2418
FP-Safe controller with relay expansion unit and transistor I/O expansion unit and motion monitoring unit, 30 redundant digital inputs, 2 inputs for 2 incremental measuring systems, 4 redundant and 17 freely configurable outputs (PNP), 4 safety relay outputs, spring terminal, 24VDC	1.89 x 10 ⁻⁸	AFSCWH3020
Connecting cable between FP-Safe and FP-series PLC (3-pin COM port), 0.5m	-	CABMODPLC111D
Connecting cable between FP-Safe and FP-series PLC (9-pin COM port), 0.5m	-	CABMODPLC211D
Connecting cable between FP-Safe and FP-series PLC (5-pin mini-DIN), 0.5m	-	AFS8TP
Programming cable for FP-Safe controller, sub-D (9pin, male), 3m	-	AFS8PG9

Web Datalogger unit

Description	Part number
Web Datalogger unit (DLU), log data of up to 99 devices	AFL1200
IP setting tool, Control Configurator WD	free to download
RS485 cassette pack including DLU, RS485 communication cassette, battery	AFL1200T20
"Eco Starter Pack including DLU, RS485 Cassette Pack, DLU setting tool, Operation checking tool (KW Watcher), Cables, Manuals	AFL1200T10

Please refer to FP-Safe brochure for details.

Further Panasonic products

Panasonic Electric Works offers a wide product range from one source, from individual components to complete systems. Technology support for advice, design-in, installation and commissioning by our qualified application engineers round off the Panasonic service profil.



Programmable controllers

Programmable controllers from Panasonic represent "control advantages" that pay for themselves right from the start.



Servo Drives

Panasonic servo drives enable high performance motion control to be applied to almost all types of machines, including chip mounting machines and general industrial machines.



UV curing systems

Aicure UJ30 is a LED curing system that quickly hardens UV-sensitive resins such as adhesives, ink and coatings. Its cutting edge LED technology is especially suited for precise, high-intensity curing.



ACD components

Components such as Eco-power meters, timers/counters, temperature controllers, limit switches and fans round off our wide Factory Automation product range.



Machine Vision Systems

Panasonic offers the complete range of high quality industrial Machine Vision Systems. From the easy Vision-Sensor to the high-end inspection machine, 100% quality inspection and process control is assured.



Human Machine Interfaces

Our compact size, bright and easy-to-read Human Machine Interfaces can be used to visualize inspection results. Touch panels can even replace the standard keypad if you so desire.



Laser Markers

SUNX/Panasonic laser markers are ideal for non-contact, permanent labelling of most materials, e.g. plastics, glass, paper, wood and leather. Several CO₂ laser marking systems and a unique FAYb laser marker can be easily integrated into existing production systems for a great variety of labelling tasks.

Global Network

North America

Europe

Asia Pacific

China

Japan

Panasonic Electric Works

Please contact our Global Sales Companies in:

Europe

▶ Headquarters	Panasonic Electric Works Europe AG	Rudolf-Diesel-Ring 2, 83607 Holzkirchen, Tel. +49 (0) 8024 648-0, Fax +49 (0) 8024 648-111, www.panasonic-electric-works.com
▶ Austria	Panasonic Electric Works Austria GmbH	Josef Madersperger Str. 2, 2362 Biedermannsdorf, Tel. +43 (0) 2236-26846, Fax +43 (0) 2236-46133 www.panasonic-electric-works.at
	PEW Electronic Materials Europe GmbH	Ennschafenstraße 30, 4470 Enns, Tel. +43 (0) 7223 883, Fax +43 (0) 7223 88333, www.panasonic-electronic-materials.com
▶ Benelux	Panasonic Electric Works Sales Western Europe B.V.	De Rijn 4, (Postbus 211), 5684 PJ Best, (5680 AE Best), Netherlands, Tel. +31 (0) 499 372727, Fax +31 (0) 499 372185, www.panasonic-electric-works.nl
▶ Czech Republic	Panasonic Electric Works Czech s.r.o.	Průmyslová 1, 34815 Planá, Tel. (+420)-374 799 990, Fax (+420)-374 799 999, www.panasonic-electric-works.cz
▶ France	Panasonic Electric Works Sales Western Europe B.V.	Succursale française, 10, rue des petits ruisseaux, 91370 Verrières Le Buisson, Tél. +33 (0) 1 6013 5757, Fax +33 (0) 1 6013 5758, www.panasonic-electric-works.fr
▶ Germany	Panasonic Electric Works Europe AG	Rudolf-Diesel-Ring 2, 83607 Holzkirchen, Tel. +49 (0) 8024 648-0, Fax +49 (0) 8024 648-111, www.panasonic-electric-works.de
▶ Hungary	Panasonic Electric Works Europe AG	Erdőalja út 91/a, 1037 Budapest, Tel. +36 (0) 20 9715688, www.panasonic-electric-works.hu
▶ Ireland	Panasonic Electric Works UK Ltd.	Dublin, Tel. +353 (0) 14600969, Fax +353 (0) 14601131, www.panasonic-electric-works.co.uk
▶ Italy	Panasonic Electric Works Italia srl	Via del Commercio 3-5 (Z.I. Ferlina), 37012 Bussolengo (VR), Tel. +39 (0) 456752711, Fax +39 (0) 456700444, www.panasonic-electric-works.it
▶ Nordic Countries	Panasonic Electric Works Nordic AB	Sjöängsvägen 10, 19272 Sollentuna, Sweden, Tel. +46 859476680, Fax +46 859476690, www.panasonic-electric-works.se
▶ Poland	Panasonic Electric Works Polska sp. z o.o.	Jungmansgatan 12, 21119 Malmö, Tel. +46 40 697 7000, Fax +46 40 697 7099, www.panasonic-fire-security.com
▶ Portugal	Panasonic Electric Works España S.A.	Portuguese Branch Office, Avda Adelino Amaro da Costa 728 R/C J, 2750-277 Cascais, Tel. +351 214812520, Fax +351 214812529
▶ Spain	Panasonic Electric Works España S.A.	Barajas Park, San Severo 20, 28042 Madrid, Tel. +34 913293875, Fax +34 913292976, www.panasonic-electric-works.es
▶ Switzerland	Panasonic Electric Works Schweiz AG	Grundstrasse 8, 6343 Rotkreuz, Tel. +41 (0) 41 7997050, Fax +41 (0) 41 7997055, www.panasonic-electric-works.ch
▶ United Kingdom	Panasonic Electric Works UK Ltd.	Sunrise Parkway, Linford Wood, Milton Keynes, MK14 6LF, Tel. +44 (0) 1908 231555, Fax +44 (0) 1908 231599, www.panasonic-electric-works.co.uk

North & South America

▶ USA	PEW Corporation of America	629 Central Avenue, New Providence, N.J. 07974, Tel. 1-908-464-3550, Fax 1-908-464-8513, www.pewa.panasonic.com
--------------	-----------------------------------	---

Asia Pacific/China/Japan

▶ China	Panasonic Electric Works (China) Co., Ltd.	Level 2, Tower W3, The Towers Oriental Plaza, No. 2, East Chang An Ave., Dong Cheng District, Beijing 100738, Tel. (010) 5925-5988, Fax (010) 5925-5973
▶ Hong Kong	Panasonic Electric Works (Hong Kong) Co., Ltd.	RM1205-9, 12/F, Tower 2, The Gateway, 25 Canton Road, Tsimshatsui, Kowloon, Hong Kong, Tel. (0852) 2956-3118, Fax (0852) 2956-0398
▶ Japan	Panasonic Electric Works Co., Ltd.	1048 Kadoma, Kadoma-shi, Osaka 571-8686, Japan, Tel. (06) 6908-1050, Fax (06) 6908-5781, http://panasonic-electric-works.net
▶ Singapore	Panasonic Electric Works Asia Pacific Pte. Ltd.	101 Thomson Road, #25-03/05, United Square, Singapore 307591, Tel. (06255) 5473, Fax (06253) 5689

Panasonic[®]