

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM 20 2TT, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us



LOGOSCREEN es



Paperless Recorder for secure acquisition of FDA-compliant measurement data


Brief description

Together with its PC software components, this paperless recorder provides a closed system for the electronic acquisition, storage and archiving of process data that fulfills the requirements of FDA 21 CFR Part 11.


The presentation is mainly determined by a 5.7" color screen, on which the measurement data are displayed in different formats (numbers, diagrams, bar graph...).

The integrated Security Manager ensures that only authorized persons can operate the instrument, and the integrated Audit-Trail Manager ensures seamless documentation of all operative actions.

Measurement data are electronically stored and available for evaluation both locally and on a PC. Front bezel size is 144 mm x 200 mm, maximum mounting depth is 228 mm.

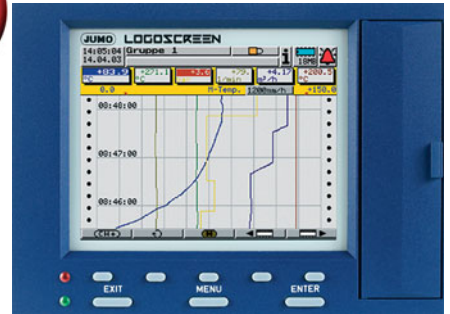


Type 706560/...

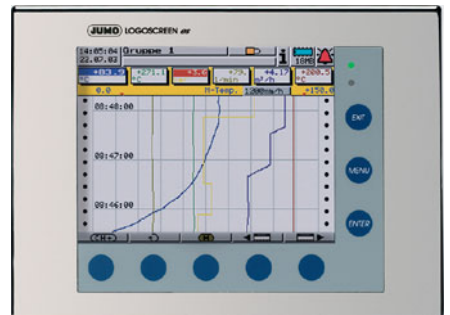

Type 706560/..., stainless steel front

Block structure

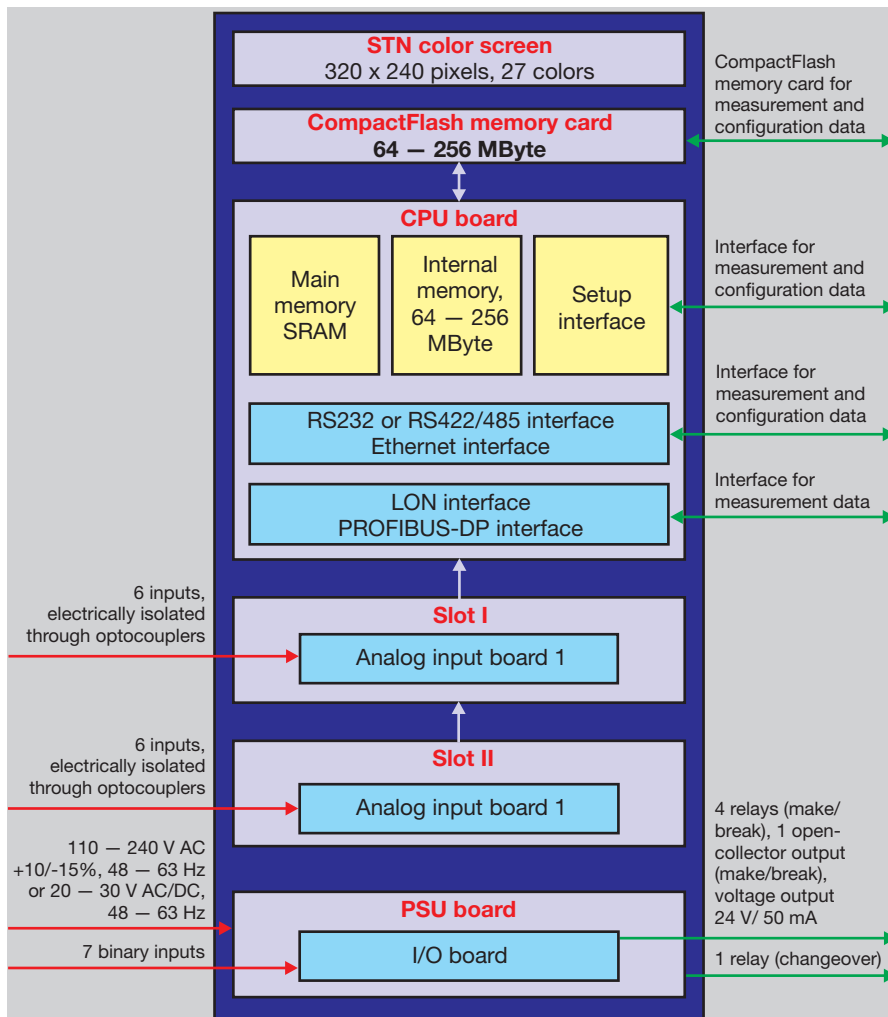

Key features

- conforms to FDA CFR Part 11
- monitored back-panel cover
- no chart/pens
- presentation of the measurement data in vertical/horizontal diagrams, bar graph, numerical, ...
- batch reporting
- local availability of the measurement data stored in RAM
- data records can be saved to a CompactFlash memory card
- instrument can be configured from the keypad, via the CompactFlash memory card or serial interface
- evaluation of the archived data through the PC evaluation software
- adaptation of the storage cycles to the individual process through
 - normal operation
 - event operation
 - day-time operation
- report with minimum/maximum/average values and integrator
- freely programmable inputs for resistance thermometers, thermocouples, DC current and DC voltage
- sampling cycle minimum 125msec with 12 analog inputs
- PROFIBUS-DP and Ethernet connection

Technical data

Internal analog inputs (channels 1 to 12)

Thermocouple

| Designation | Type | Standard | Range | Linearization accuracy ¹ |
|--------------------------------------|---|------------|--|-------------------------------------|
| Fe-Con | L | DIN 43 710 | -200 to + 900°C | ±0.1% |
| Fe-Con | J | EN 60 584 | -210 to +1200°C | ±0.1% above -100°C |
| Cu-Con | U | DIN 43 710 | -200 to + 600°C | ±0.1% above -150°C |
| Cu-Con | T | EN 60 584 | -270 to + 400°C | ±0.15% above -150°C |
| NiCr-Ni | K | EN 60 584 | -270 to +1372°C | ±0.1% above -80°C |
| NiCr-Con | E | EN 60 584 | -270 to +1000°C | ±0.1% above -80°C |
| NiCrSi-NiSi | N | EN 60 584 | -270 to +1300°C | ±0.1% above -80°C |
| Pt10Rh-Pt | S | EN 60 584 | -50 to +1768°C | ±0.15% above 0°C |
| Pt13Rh-Pt | R | EN 60 584 | -50 to +1768°C | ±0.15% above 0°C |
| Pt30Rh-Pt6Rh | B | EN 60 584 | 0 to 1820°C | ±0.15% above 400°C |
| Shortest span | | | Types L, J, U, T, K, E, N: Types S, R, B: | 100°C 500°C |
| Range start/end | freely programmable within the limits in 0.1 °C steps | | | |
| Cold junction | Pt100 internal or thermostat external constant | | | |
| Cold junction accuracy (internal) | ± 1°C | | | |
| Cold junction temperature (external) | -50 to +100°C, adjustable through setup software | | | |
| Sampling cycle | 6 or 12 channels 125msec | | | |
| Input filter | 2nd order digital filter; filter constant adjustable from 0 – 10.0sec | | | |
| Test voltage | 500V (across optocoupler) | | | |
| Resolution | better than 14 bit | | | |
| Features | also programmable in °F | | | |

¹ The linearization accuracy refers to the maximum range span.
The linearization accuracy is reduced for shorter spans.

Resistance thermometers

| Designation | Standard | Connection | Range | Linearization accuracy | Measuring current |
|-----------------------|---|------------|----------------|------------------------|-------------------|
| Pt 100 | EN 60 751 | 2/3-wire | -200 to +500°C | ±0.4°C | 500µA |
| | | 2/3-wire | -200 to +850°C | ±0.8°C | 250µA |
| | | 4-wire | -200 to +500°C | ±0.4°C | 500µA |
| | | 4-wire | -200 to +850°C | ±0.5°C | 250µA |
| Pt 100 JIS | | 2/3-wire | -200 to +500°C | ±0.4°C | 500µA |
| | | 2/3-wire | -200 to +650°C | ±0.8°C | 250µA |
| | | 4-wire | -200 to +500°C | ±0.4°C | 500µA |
| | | 4-wire | -200 to +650°C | ±0.5°C | 250µA |
| Pt 500 | EN 60 751 | 2/3-wire | -200 to +500°C | ±0.4°C | 250µA |
| | | 2/3-wire | -200 to +850°C | ±0.8°C | 250µA |
| | | 4-wire | -200 to +500°C | ±0.4°C | 250µA |
| | | 4-wire | -200 to +850°C | ±0.5°C | 250µA |
| Pt 1000 | EN 60 751 | 2/3-wire | -200 to +500°C | ±0.4°C | 500µA |
| | | 2/3-wire | -200 to +850°C | ±0.8°C | 250µA |
| | | 4-wire | -200 to +500°C | ±0.4°C | 500µA |
| | | 4-wire | -200 to +850°C | ±0.5°C | 250µA |
| Ni 100 | EN 60 751 | 2/3-wire | -60 to +180°C | ±0.4°C | 500µA |
| | | 4-wire | -60 to +180°C | ±0.4°C | 500µA |
| Connection type | 2-, 3- or 4-wire circuit | | | | |
| Shortest span | 15°C | | | | |
| Probe lead resistance | max. 30Ω per core for 3- and 4-wire circuit max. 10Ω per core for 2-wire circuit | | | | |
| Range start/end | freely programmable within the limits in 0.1°C steps | | | | |
| Sampling cycle | 6 or 12 channels 125msec | | | | |
| Input filter | 2nd order digital filter; filter constant adjustable from 0 – 10sec | | | | |
| Test voltage | 500V (across optocoupler) | | | | |
| Resolution | better than 14 bit | | | | |
| Features | also programmable in °F | | | | |

Resistance transmitter and potentiometer

| Range | Accuracy | Measuring current |
|-----------------------|--|-------------------|
| up to 180Ω | ±150mΩ | 500μA |
| up to 390Ω | ±300mΩ | 250μA |
| up to 2000Ω | ±2Ω | 500μA |
| up to 4000Ω | ±4Ω | 250μA |
| Connection type | resistance transmitter: 3-wire circuit potentiometer: 2-/3-wire circuit | |
| Shortest span | 6Ω | |
| Probe lead resistance | max. 30Ω per core in 4-wire circuit max. 20Ω per core in 2- and 3-wire circuit up to 200Ω range: max. 10Ω per core in 2-and 3-wire circuit | |
| Resistance values | freely programmable within the limits in 0.1Ω steps | |
| Sampling cycle | 6 or 12 channels 125msec | |
| Input filter | 2nd order digital filter; filter constant adjustable from 0 – 10.0sec | |

Input for DC voltage or DC current

| Basic range | Accuracy | Input resistance |
|-----------------|---|--|
| -20 to +70mV | ±80μV | R _{IN} ≥ 1 MΩ |
| -5 to +105mV | ±100μV | R _{IN} ≥ 1 MΩ |
| -10 to +210mV | ±240μV | R _{IN} ≥ 1 MΩ |
| -0.5 to +12 V | ±6mV | R _{IN} ≥ 470 kΩ |
| -0.05 to + 1.2V | ±1 mV | R _{IN} ≥ 470 kΩ |
| -1.2 to + 1.2V | ±2mV | R _{IN} ≥ 470 kΩ |
| -12 to +12 V | ±12mV | R _{IN} ≥ 470 kΩ |
| Shortest span | 5mV | |
| Range start/end | freely programmable within the limits (up to 999mV in 0.01mV steps, above 1V in 1mV steps) | |
| -2 to +22mA | ±20μA | burden voltage 1V max. burden voltage 1V max. |
| -22 to +22mA | ±44μA | |
| Shortest span | 0.5mA | |
| Range start/end | freely programmable within the limits in 0.1mA steps | |
| Sampling cycle | 6 or 12 channels 125msec | |
| Input filter | 2nd order digital filter; filter constant adjustable from 0 – 10.0sec | |
| Features | adjustable linearizations for thermocouples and resistance thermometers (for connection to transmitters without linearization) | |

Transducer short-circuit/break

| | Short-circuit ¹ | Break ¹ |
|------------------------|----------------------------|--------------------|
| Thermocouple | not detected | detected |
| Resistance thermometer | detected | detected |
| Resistance transmitter | detected | detected |
| Potentiometer | not detected | detected |
| Voltage up to ± 1V | not detected | detected |
| Voltage above ± 1V | not detected | not detected |
| Current | not detected | not detected |

¹ Programmable reaction of instrument, e.g. triggering alarm

Binary inputs (extra code)

| | |
|----------------|--|
| Number | 7 to DIN VDE 0411, Part 500; 25Hz max., 32V max. |
| Level | logic "0": -3 to +5V, logic "1": 12 to 30V |
| Sampling cycle | minimum 1 sec |

Outputs

| | |
|--------------------------------------|--|
| 1 relay (ex-factory) | changeover (SPDT), 3A, 230V AC ¹ |
| 4 relays (extra code) | make/break (SPST-NO/SPST-NC), 3A, 230V AC ¹ |
| 1 open-collector output (extra code) | 25V max., 100mA max. |

¹ with resistive load. It is not permissible to mix SELV circuits and supply circuits.

Screen

| | |
|------------------|------------------|
| Resolution | 320 x 240 pixels |
| Size | 5.7" |
| Number of colors | 27 colors |

Electrical data

| | |
|---|--|
| Supply (switch-mode power supply) | 110 – 240V AC +10/-15%, 48 – 63Hz or 20 – 30V AC/DC 48 – 63Hz |
| Electrical safety | to EN 61 010, Part 1, August 2002 overvoltage category II, pollution degree 2 |
| Test voltages (type test) | |
| - mains supply circuit to measurement circuit | with AC supply: 3.7kV 50Hz, 1 min, with AC/DC supply: 510V 50Hz, 1 min |
| - mains supply circuit to housing (protective earth) | with AC supply: 2.3kV 50Hz, 1 min, with AC/DC supply: 510V 50Hz, 1 min |
| - measurement circuits to measurement circuit and housing | 510V 50Hz, 1 min |
| - electrical isolation between the analog inputs | up to 30V AC and 50V DC |
| Supply voltage error | less than 0.1 % of span |
| Power consumption | 25VA approx. |
| Data backup | see page 7 |
| Electrical connection | at rear through plug-in screw terminals, max. conductor cross-section 2.5mm ² or 2x 1.5mm ² with ferrules |

Environmental influences

| | |
|----------------------------|--|
| Ambient temperature range | 0 to +45°C |
| Ambient temperature error | 0.03 % per °C |
| Storage temperature range | -20 to +60°C |
| Climatic conditions | not exceeding 75% relative humidity, no condensation |
| EMC | EN 61 326 |
| - interference emission | Class A |
| - immunity to interference | to industrial requirements |

Housing

| | |
|--------------------|--|
| Housing front | zinc die-casting |
| Housing type | housing for flush-panel mounting to DIN 43 700, galvanized steel |
| Bezel size | 200mm x 144mm |
| Depth behind panel | 233mm |
| Panel cut-out | 138 ^{+1.0} mm x 138 ^{+1.0} mm |
| Housing fixing | in panel to DIN 43 834 |
| Operating position | unrestricted, taking into account the viewing angle of the screen, horizontal ±50°, vertical ±30° |
| Protection | to EN 60 529 Category 2, front IP54 (IP65 with extra code stainless steel front), rear IP20 |
| Weight | 3.5kg approx. |


External analog measurement inputs / binary inputs / binary outputs

| | |
|----------------|--|
| Type | JUMO mTRON automation system |
| Sampling cycle | 1 sec |
| Technical data | see Data Sheet: 70.4015 Relay module 70.4020 Analog input module 70.4030 Logic module |
| Configuration | iTOOL Project design software (70.4090) |

Operation and configuration

On the recorder

The instrument is configured from eight keys under menu guidance. Functions of 5 keys (softkeys) on the instrument alter according to the context so that there are always unique key functions during operation. Softkey functions are indicated on the screen in plain text or through symbols.

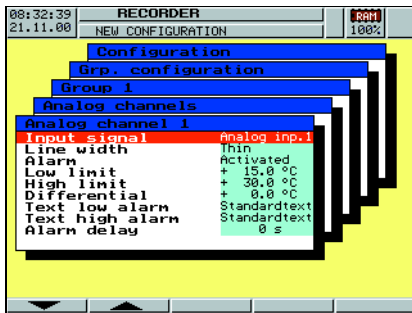


Integrated user lists (for various users with different access rights) protect the recorder from unauthorized access.

Via setup program for PC (extra code)

More conveniently than from the instrument keys, the recorder can be configured via the setup program for PC.

Communication between the PC setup program and the paperless recorder can be made through:

- the setup interface
- the serial interface
- the Ethernet interface, or
- the CompactFlash memory card.

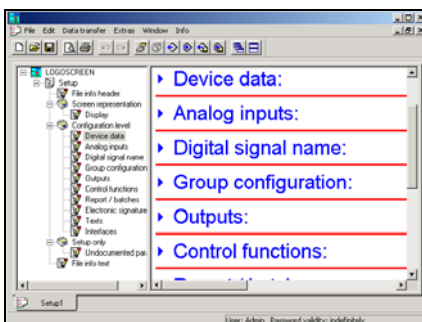

The configuration data can be archived on a data storage medium and can be output to a printer.

Via CompactFlash memory card

The configuration can be saved to a CompactFlash memory card, and read into the instrument from this card.


Operating language

The operating language for the instrument can be configured for different languages. English, German, French, Dutch, Italian, Spanish, Hungarian, Czech, Swedish, Polish, Danish, Finnish, Portuguese and Russian have already been implemented.

PC programs (accessories)

PC evaluation program (PCA 3000)

The PC evaluation program (PCA 3000) is a program which runs under Windows NT4.0/2000/XP, and is used to manage, archive, visualize and evaluate the recorder data.

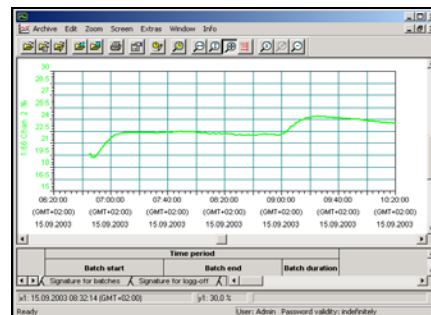

- The data of instruments with different configurations are recognized by the evaluation program and stored in an archive database. The complete management is performed automatically. The user only has to enter an identifier (supplementary description) manually.
- The user can at any time access specific sets of data which can be distinguished by the identifier. In addition, the time ranges to be evaluated can be limited.
- Any analog and digital channels of a paperless recorder can be subsequently combined into PCA groups in the PCA3000 software.
- Since each group is displayed in a separate window, several groups can be shown simultaneously on the screen and compared.
- Operation by mouse and keys.
- It is possible to export the stored data via the export filter, so that they can be processed in other programs, such as Excel.
- The PCA 3000 evaluation program has network capability, i.e. several users can obtain data from the same database in the network independently of each other.

PCA communications software (PCC)

- The data can be read out from the paperless recorder via the serial interface (RS232/RS422/RS485). The data can be read out either manually or automatically (e.g. daily at 23 hrs).
- Data can also be retrieved via remote control, through a modem.

PC Security Manager (PCS)

- Software for the administration of access control. This software is only accessible for administrators.

PC Audit-Trail Manager

- Software for the documentation of operational actions that could lead to alterations in the data records.

Interfaces

- Setup interface (fitted as standard)
- RS232 interface (fitted as standard)
- RS422/485 interface (extra code)
- Ethernet interface (extra code)
- LON interface (extra code)
- PROFIBUS-DP interface (extra code)

Setup interface

The setup interface is used together with the PC interface cable (including the TTL/RS232 converter and adapter) for operation of the PC setup program (see Page 5). The paperless recorder has setup interfaces (connected in parallel) on both the front and back panels. They cannot both be used at the same time.

RS232 interface

RS422/485 interface

The current process data, as well as specific instrument data, can be read out via the RS232 or RS422/RS485 interfaces. The data that are stored in the internal memory can also be read out in conjunction with the PC evaluation software PCA3000 and the PCA communications software (PCC).

Normally, the instrument is supplied with a RS232 interface which allows for a lead length of maximum 15 meters. The RS422/RS485 interface permits a lead length of 1.2 km.

Connection is by a 9-pin SUB-D connector at the back of the instrument. Modbus and Jbus protocols are available, and the transmission mode used is RTU (Remote Terminal Unit).

Ethernet interface

The Ethernet interface can be used in local networks for communication between the paperless recorder and the PC setup program or the PCA communications software. The IP address is given a fixed setting through configuration on the instrument or in the PC setup program.

When using the Ethernet interface, care must be taken to ensure that only one client at a time is permitted to access the instrument (server).

Transmission protocol: TCP/IP

Network type: 10BaseT

| | Setup interface | RS232 RS422 RS485 | Ethernet | PROFI-BUS-DP | LON | External CF card |
|--|-----------------|-------------------------|----------|--------------|-----|------------------|
| Read/write measurements (present data) | yes | yes | yes | yes | yes | no |
| Read measurements (stored data) | yes | yes | yes | no | no | yes |
| Read/write configuration | yes | yes | yes | no | no | yes |
| Write user list | yes | yes | yes | no | no | yes |
| Read screen memory | yes | yes | yes | no | no | no |

PROFIBUS-DP interface

The paperless recorder can be integrated into a fieldbus system according to the PROFIBUS-DP standard, via the PROFIBUS-DP interface. This PROFIBUS variant is particularly suitable for the communication between automation systems and distributed peripheral devices at the field level.

Data transmission takes place serially according to the RS485 standard, at a maximum of 12Mbit/sec.

Using the project design tool that is included in the delivery (GSD generator; GSD = Device Base Data), an application-specific GSD file is created, which is used to integrate the paperless recorder into the fieldbus system.

Up to 36 channels can be read in via the PROFIBUS.

LON interface

The LON interface is used to expand the measurement channels (channels 13 – 36) through modules from the JUMO mTRON automation system.

External CompactFlash memory card (CF)

The external CompactFlash memory card is used to transfer the data from the internal memory to the PC. Configuration data can be created on the PC and then transferred to the paperless recorder by means of the memory card.

On the PC side, data on the card is accessed with the help of a CompactFlash reader/writer.

Data processing

Data recording

The measurements of the analog inputs are acquired continuously in a 125msec sampling cycle. Based on these measurements, reports are compiled and limits monitored.

Depending on the programmable storage cycle and stored value (maximum/minimum/average or instantaneous value), the measurements are transferred to the main memory of the instrument.

Main memory (RAM)

The data which are stored in the RAM are regularly copied to the internal memory in 10 kByte blocks. This is written to as a ring memory, i.e. when the RAM is full, the oldest data will automatically be overwritten by new data. The storage capacity is sufficient for 350,000 measurements.

The data from the main memory can be shown as a history presentation on the paperless recorder.

Internal memory

When a block of the main memory has been filled it is copied to the internal memory. The internal memory has a capacity of 64 – 256 MByte.

Every write action is monitored, so that any errors in saving data can be immediately identified.

The instrument monitors the capacity of the internal memory and activates one of the "memory alarm" signals when the capacity has fallen below the configurable residual capacity level. These signals can be used, for instance, to operate a relay.

CompactFlash memory card (external)


The external (replaceable) CompactFlash memory card can be used to transfer the data to a PC.

Data security

The data are stored in coded form in a proprietary format. This ensures a high level of data security.

If the paperless recorder is disconnected from the supply, then:

- RAM and clock time are buffered by a lithium battery (ex-factory) for more than 4 years, or more than 2 days with a storage capacitor (at 15 to 25°C ambient temperature)
- measurement data in the internal memory will not be lost
- configuration data are saved in the non-volatile Flash memory

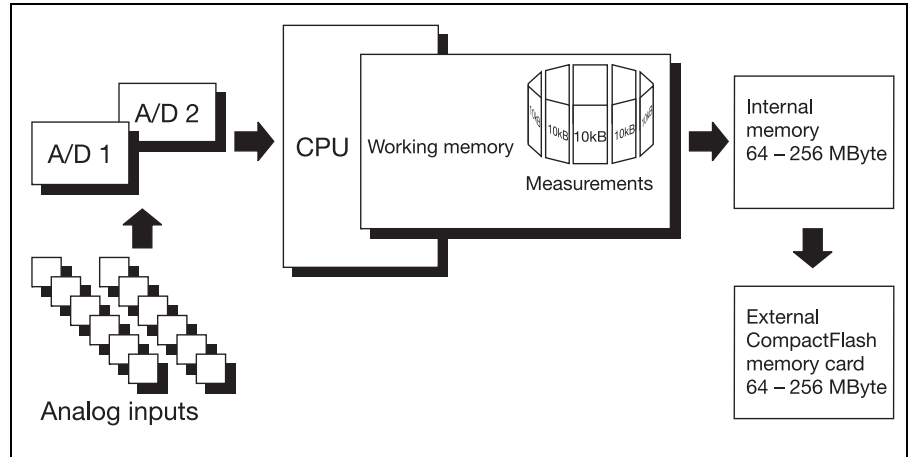

Recording duration

Depending on the configuration of the instrument, the duration of the recording can vary over a considerable range (from a few days up to several months).

Data transfer

Data transfer from the paperless recorder to a PC is made by means of the external CompactFlash memory card, via the serial interface, or via the Ethernet interface.

Reports

For each input, a report (maximum/minimum/average and integrator) can be run over a pre-defined period.

Batch reports

Batch reporting can be performed in conjunction with an external report. Start, end and duration of a batch are recorded. Together with a batch counter and freely definable texts, these times can be displayed on the paperless recorder and within the PC evaluation software PCA3000.

Batch reporting can, for instance, be started by

- binary inputs 1 – 7 (extra code)
- Modbus flag (serial interface)
- external binary inputs 1 – 6 (JUMO mTRON system)

Limit monitoring/ change of operating mode

Over/underlimit conditions trigger an alarm. The alarm can be used, for instance, as a control signal to switch the operating mode from normal/timed operation to event operation.

The storage cycle and stored value can be configured separately for all three operating modes.

With the help of the alarm delay function, brief occurrences of over/underlimit conditions can be filtered out, with the result that no alarm is produced.

Normal operation

If no alarm is present and the instrument is not in timed operation, normal operation is active.

Event operation

Event operation is activated/deactivated by a control signal (log. input, group/com-bination alarm, ...). As long as the control signal is active, the recorder is in event operation.


Timed operation

Timed operation is active on a daily basis for a programmable period of time. The operating modes have different priorities:

| Operating mode | Priority |
|------------------|------------|
| Event operation | 1 (higher) |
| Timed operation | 2 |
| Normal operation | 3 (lower) |


Presentation modes on the recorder

Group manager

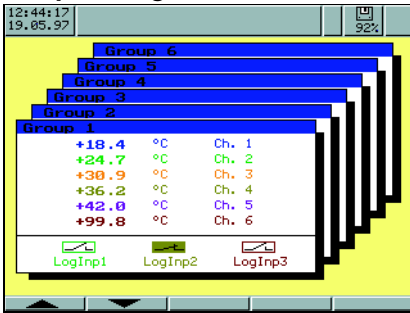


- 6 groups, each with any 6 analog and 3 binary inputs
- one input can be assigned to several groups
- display of present measurements or states of inputs
- groups can be active/inactive

Bar graph presentation

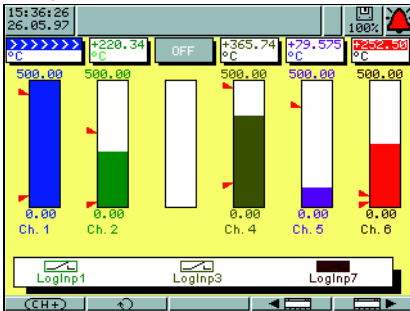


- bar graph presentation of the analog channels
- on/off presentation of the digital channels
- display of the present analog channels with scaling and limit markers
- color change of bar graph to red on overlimit condition

Report

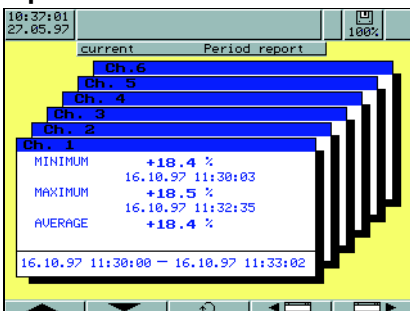

- report of one analog channel in its own window
- indication of minimum, maximum, average/integral value and time period
- display of previous report

Vertical diagram

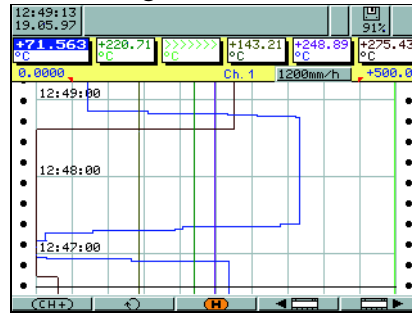


- recorder chart presentation of the analog channels
- scaling and limit marker indication on one channel
- numerical display of the present analog channels

Horizontal diagram




- graphical presentation of the analog and digital channels
- scaling and limit marker indication on one channel
- numerical display of the present measurements of the analog channels

Numerical presentation

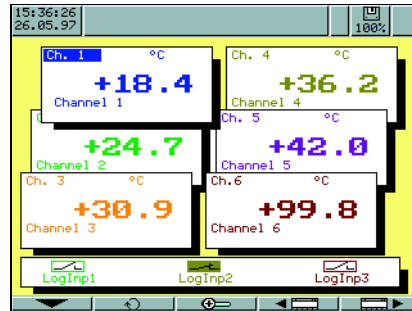


- large numerical presentation of the analog channels, including the 2-line channel description
- each analog channel can be switched to the foreground
- on/off presentation of the digital channels

Numerical 1-channel presentation

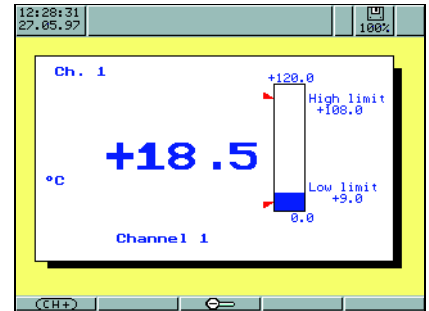


- clear presentation of one analog channel
- one analog channel is presented simultaneously as bar graph and number
- display of the 2-line channel designation
- indication of scaling and limit markers

History presentation vert./horiz.

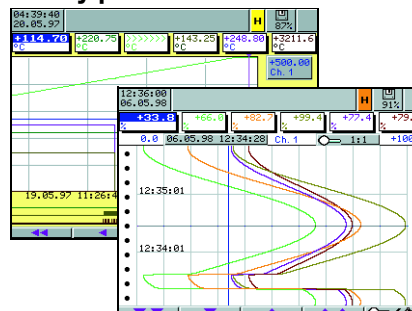


- graphical presentation of all stored measurement data at different zoom levels
- indication of scaling and limit markers for one channel
- numerical display of the measurements of the analog channels at the cursor position
- shifting of the visible window within the stored measurement data

History analysis

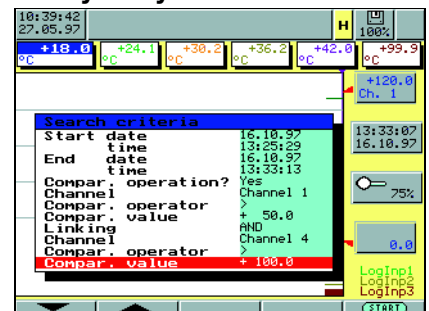



- restriction to a specific time period

Connection diagram

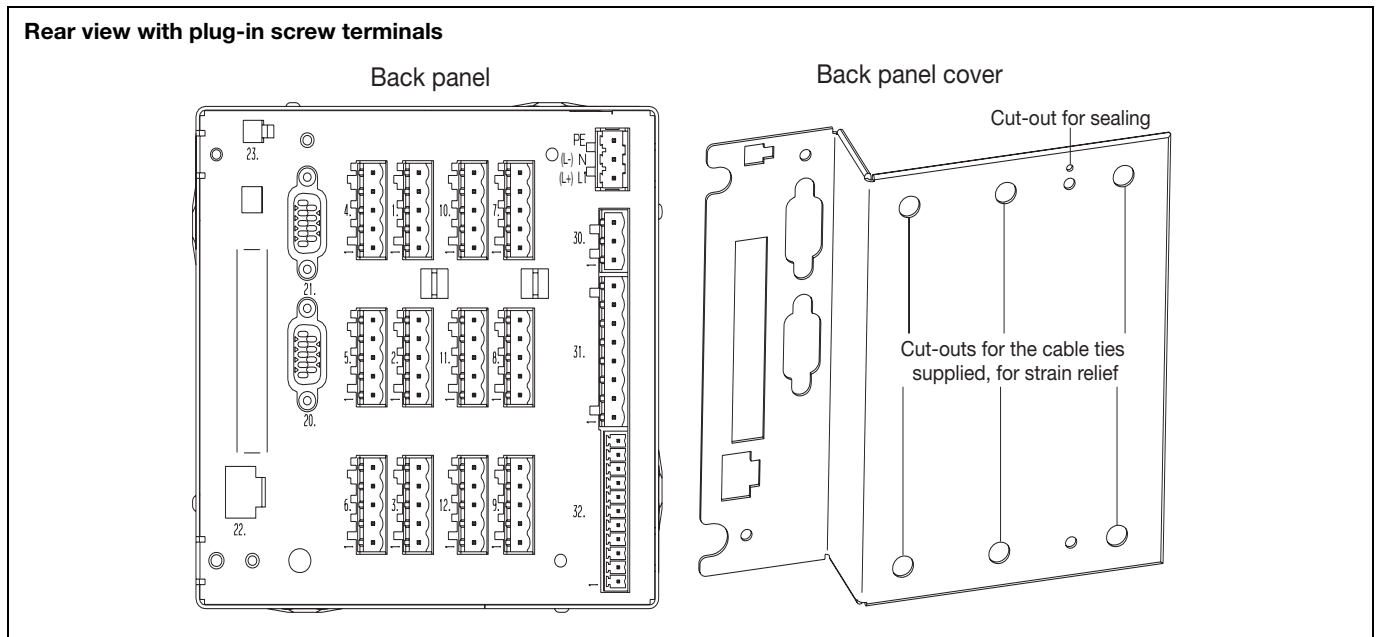


| Terminal assignment | Connector | Diagram |
|--|-------------------------|---------|
| Supply voltage | | |
| Supply voltage as per nameplate | L1 (L+) N (L-) PE | |
| Analog inputs | | |
| Thermocouple | 1 to 12 | |
| Resistance thermometer in 2-wire circuit | 1 to 12 | |
| Resistance thermometer in 3-wire circuit | 1 to 12 | |
| Resistance thermometer in 4-wire circuit | 1 to 12 | |
| Resistance transmitter | 1 to 12 | |
| Potentiometer in 2-wire circuit | 1 to 12 | |
| Potentiometer in 3-wire circuit | 1 to 12 | |


| | | |
|--|---------|---|
| Potentiometer in 4-wire circuit | 1 to 12 | |
| Voltage input up to 200mV | 1 to 12 | |
| Voltage input above 200mV | 1 to 12 | |
| Current input | 1 to 12 | |
| Digital interfaces | | |
| RS232 9-pin SUB-D socket | 20 | 2 RxD receive data 3 TxD transmit data 5 GND ground |
| RS422 9-pin SUB-D socket (extra code) | 20 | 3 TxD+ transmit data + 4 RxD+ receive data + 5 GND ground 8 TxD- transmit data - 9 RxD- receive data - |
| RS485 9-pin SUB-D socket (extra code) | 20 | 3 TxD+/RxD+ transmit/receive data + 5 GND ground 8 TxD-/RxD- transmit/receive data - |
| LON interface 9-pin SUB-D socket (extra code) | 21 | 3 Net_A 9 Net_B |
| PROFIBUS-DP 9-pin SUB-D socket (extra code) | 21 | 3 RxD/TxD-P receive/transmit data-Plus B-cable 5 DGND data transmission potential 6 VP supply voltage-Plus 8 RxD/TxD-N receive/transmit data-N A-cable |
| Ethernet RJ45 socket (extra code) | 22 | 1 TX+ transmit data + 2 TX- transmit data - 3 RX+ receive data + 6 RX- receive data - |
| Setup interface | 23 | The paperless recorder also has a setup interface on the front panel (wired in parallel). It is not possible to use both at the same time. |
| Relay outputs | | |
| Relay K1 changeover (SPDT) | 30 | |
| Relay K2 to K5 make/break (SPST-NO/SPST-NC) (extra code) | 31 | |
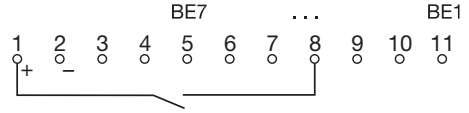
| Digital I/O | | |
|--|--|--|
| Open-collector output (extra code) | 32 3 ground 4 collector |  |
| Binary inputs (extra code) voltage-operated LOW = -3 to +5V DC HIGH = 12 to 30V DC Supply 24V/50mA | 32 1 +24V auxiliary supply not stabilized 2 GND 5 binary input 7 ... 11 binary input 1 |  <p>Example: Binary input 4 (BE4) operated from the internal supply voltage</p> |

Dimensions (also for stainless steel front)

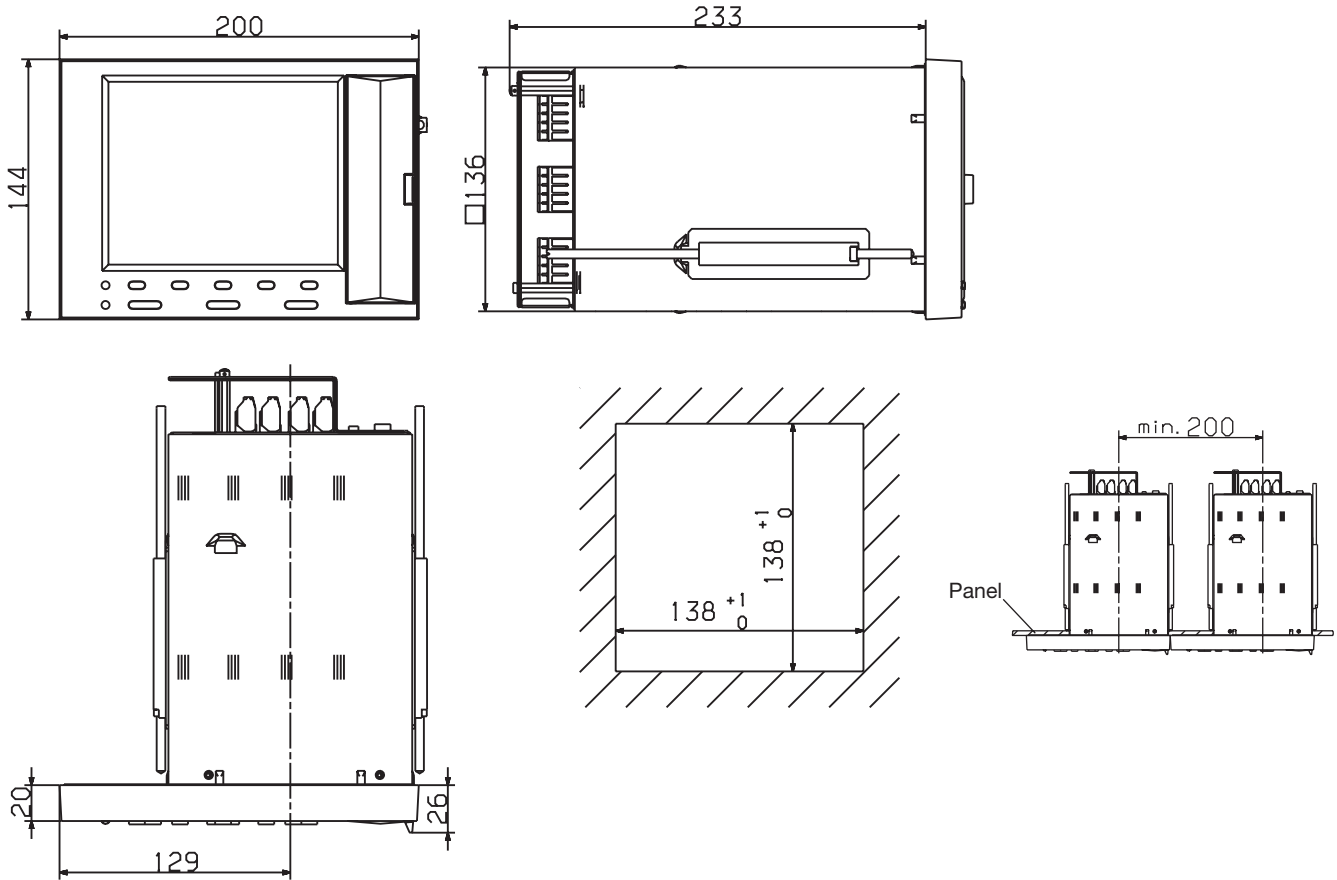

Extra code: universal carrying case TG-35 and stainless steel front

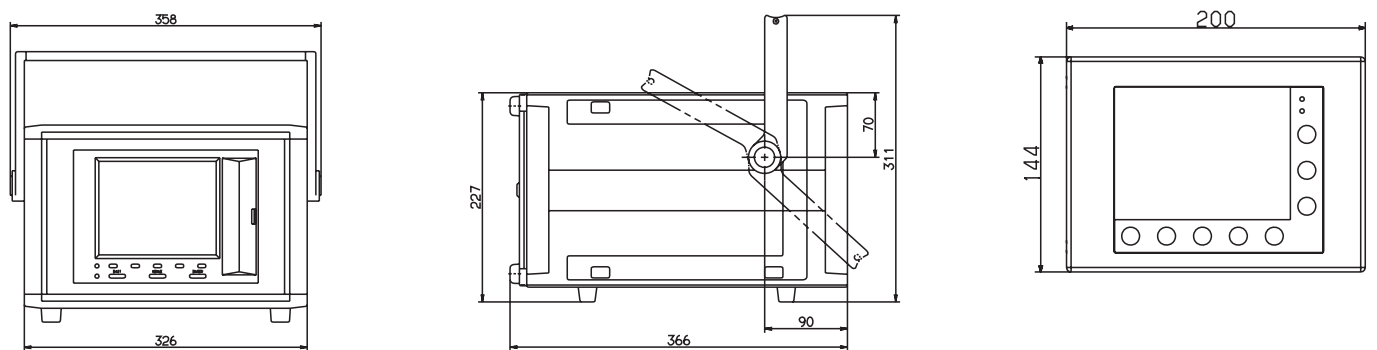

Order details

LOGOSCREEN es

Paperless Recorder for secure acquisition of FDA-compliant measurement data

| (1) Basic version | |
|----------------------------------|--|
| 706560/00 | paperless recorder without analog inputs |
| 706560/01 | paperless recorder without analog inputs incl. PC software package and interface cable/adaptor |
| 706560/10 | paperless recorder with 6 analog inputs |
| 706560/20 | paperless recorder with 6 analog inputs incl. PC software package and interface cable/adaptor |
| 706560/11 | paperless recorder with 12 analog inputs |
| 706560/21 | paperless recorder with 12 analog inputs incl. PC software package and interface cable/adaptor |
| (2) Inputs 1 – 6 (programmable) | |
| x x 000 | not assigned |
| x x x x x 888 | factory-set |
| (3) Inputs 7 – 12 (programmable) | |
| x x 000 | not assigned |
| x x x x x 888 | factory-set |
| (4) Interface | |
| x x x x x 51 | RS232 (standard) |
| x x x x x 54 | RS422/485 |
| x x x x x 66 | RS232 and LON |
| x x x x x 67 | RS422/485 and LON |
| x x x x x 68 | RS232 and PROFIBUS-DP |
| x x x x x 69 | RS422/485 and PROFIBUS-DP |
| (5) Internal memory | |
| x x x x x 0064 | 64 MB memory |
| x x x x x 0128 | 128 MB memory |
| x x x x x 0256 | 256MB memory |
| (6) External memory ¹ | |
| x x x x x 0000 | without external memory |
| x x x x x 0064 | 64 MB CompactFlash memory card |
| x x x x x 0128 | 128 MB CompactFlash memory card |
| x x x x x 0256 | 256MB CompactFlash memory card |
| (7) Supply | |
| x x x x x 23 | 110 – 240V AC +10/-15%, 48 – 63Hz |
| x x x x x 25 | 20 – 30V AC/DC 48 – 63Hz |
| (8) Extra codes | |
| x x x x x 008 | Ethernet connection |
| x x x x x 020 | lithium battery for memory buffer (ex-factory) |
| x x x x x 061 | UL approval |
| x x x x x 021 | storage capacitor (instead of extra code 020) |
| x x x x x 258 | 7 binary inputs, 1 open-collector output, 4 relay outputs, voltage output 24V DC 50mA |
| x x x x x 350 | universal carrying case TG-35 ² |
| x x x x x 444 | stainless steel front with membrane keypad |

Order code

(1) - (2) , (3) - (4) - (5) - (6) - (7) / (8) , ...³

Order example

706560/10 - 888 , 000 - 51 - 0064 - 0064 - 23 / 020


Standard accessories

- instrument documentation
- 2 fixing brackets
- 4 cable-ties with foot (can be released) for strain relief of the attached sensor cables

Accessories, data sheet 70.9700

- PC software package consisting of: setup program, PC evaluation software (PCA3000), PCA communications software (PCC), PC Security Manager (PCS) and PC Audit-Trail Manager (PCAT) Please specify all version numbers when placing repeat orders.
- PC interface with TTL/RS232 converter and adapter Sales No. 70/00350260
- PC interface with USB/TTL converter, adapter (socket) and adapter (pins) Sales No. 70/00456352
- Documentation IQ / OQ German-English Sales No. 70/00436829
- Documentation IQ / OQ French-English Sales No. 70/00441797

Supplementary accessory: Universal carrying case TG-35

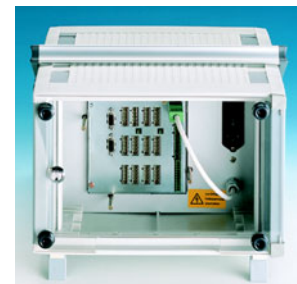

Approvals

- UL approval (extra code)



¹ The CompactFlash memory cards specified by JUMO have been tested and are suitable for industrial applications.

No guarantee is given for other CF cards.

² The UL approval (061) applies to the panel-mounting instrument only.

³ List extra codes in sequence, separated by commas.