
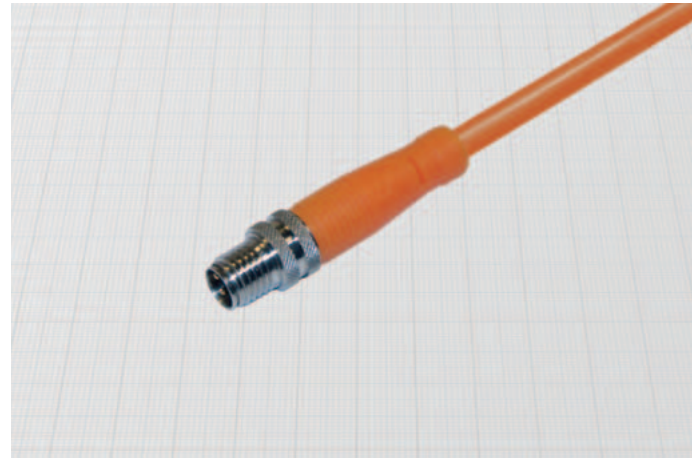


Straight in d.c. •
Moulded with cable •
 According to EN 60947-5-2 •

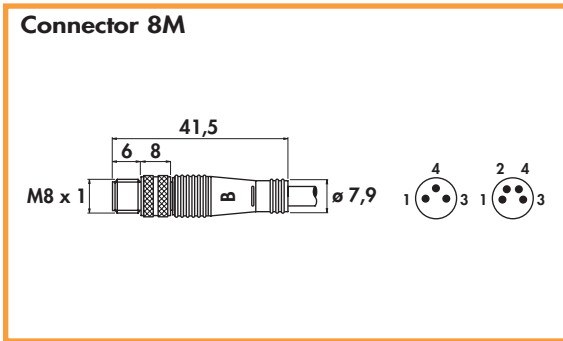

Technical data:

- Operating voltage: max 50 Vac/75 Vdc
- Maximum current: 4 A
- Contact resistance: $\leq 5 \text{ m}\Omega$
- Contacts: CuZn, brass pre-nickeled and gold plated (0,8 μm)
- Moulding: orange PUR
- Locking nut: CuZn, nickel plated brass
- Temperature range: $-25^\circ \div +90^\circ\text{C}$
- Degree of protection: IP67 with plug in fully locked position

Connector n°	Cable		ORDERING REFERENCES		
			3 wires	4 wires	3 wires + shield
	Section	3 x 0,35 mm ² - \varnothing ext. 4	4 x 0,25 mm ² - \varnothing ext. 4	3 x 0,22 mm ² + shield - \varnothing ext. 4	
Material	Length m.	1) brown + 4) black output 3) blue -	1) brown + 4) black output NO 2) white output NC 3) blue -	1) brown + 4) black output 3) blue - 2) shield	
8M	PVC	2	C8M/0032PV	C8M/0042PV	C8M/0042VS
8M	PVC	5	C8M/0035PV	C8M/0045PV	C8M/0045VS
8M	PVC	10	C8M/00310PV	C8M/00410PV	C8M/00410VS
8M	PUR	2	C8M/0032PR	C8M/0042PR	-
8M	PUR	5	C8M/0035PR	C8M/0045PR	-
8M	PUR	10	C8M/00310PR	C8M/00410PR	-