
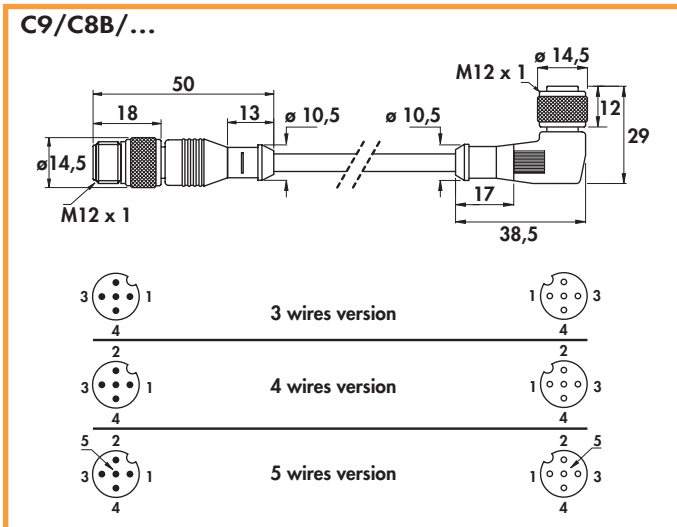
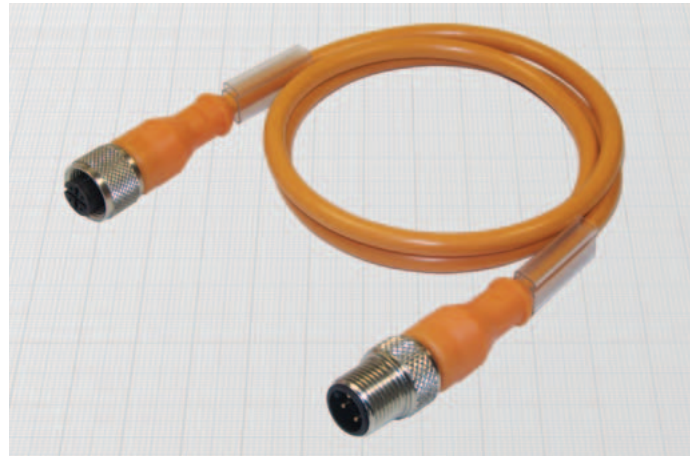


MALE M12 x 1 straight •
FEMALE M12 x 1 •
 According to EN 60947-5-2 •

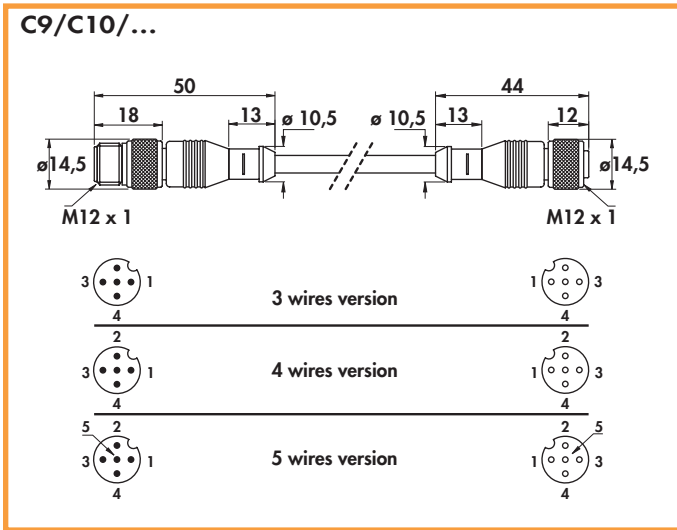

Technical data:

- Operating voltage: 10 ÷ 30 Vdc straight types with LED
5 ÷ 60 Vdc angled types with LED
max 50 Vac/75 Vdc types without LED
- Maximum current: 4 A
- Contact resistance: ≤ 5 mΩ
- Contacts: CuZn, brass pre-nickel and gold plated (0,8 μm)
- Moulding: PUR
- Locking nut: self-locking in CuZn, nickel plated brass
- Temperature range: - 25 ÷ + 90°C
- Degree of protection: IP68 with plug in fully locked position

Cable		ORDERING REFERENCES			
Material	Length m.	3 wires		4 wires	
		• Straight male • Straight female (*)	• Straight male • Angled female (*)	• Straight male • Straight female (*)	• Straight male • Angled female (*)
PVC	0,6	C9/C10/003-0,6PV	C9/C8B/003-0,6PV	C9/C10/004-0,6PV	C9/C8B/004-0,6PV
PVC	1	C9/C10/003-1PV	C9/C8B/003-1PV	C9/C10/004-1PV	C9/C8B/004-1PV
PVC	2	C9/C10/003-2PV	C9/C8B/003-2PV	C9/C10/004-2PV	C9/C8B/004-2PV
PUR	0,6	C9/C10/003-0,6PR	C9/C8B/003-0,6PR	C9/C10/004-0,6PR	C9/C8B/004-0,6PR
PUR	1	C9/C10/003-1PR	C9/C8B/003-1PR	C9/C10/004-1PR	C9/C8B/004-1PR
PUR	2	C9/C10/003-2PR	C9/C8B/003-2PR	C9/C10/004-2PR	C9/C8B/004-2PR

Note: For 5 wires version substitute the number before the cable length with 5. i.e. **C9/C10/005-0,6PV**
 (*) for LED PNP option on female part substitute the part of the code **.../00...** with **.../2P...** i.e. **C9/C10/2P3-0,6PV**
 for LED NPN option on female part substitute the part of the code **.../00...** with **.../2N...** i.e. **C9/C10/2N3-0,6PV**