


Inductive Sensors
BES 516-324-SA 8-02
M8x1 x 55.5
normally-open
Sn=1mm
shielded
temperature rated

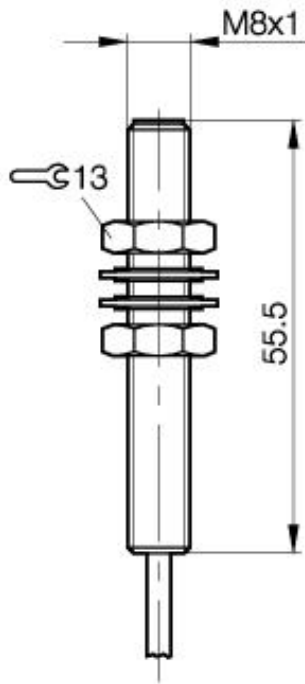

PX0035

Common Data

| | |
|--------------------------------|-------------------|
| Mounting in steel | shielded |
| Rated operating distance Sn | 1mm |
| Assured operating distance Sa | 0...0.8mm |
| Repeatability R | ≤ 5% |
| Hysteresis | ≤ 15% |
| Ambient temperature range | -25...+100°C |
| Polution Degree | 3 |
| Time delay before availability | ≤ 10ms |
| Particular characteristics | temperature rated |

Mechanical Data

| | |
|---|---------------|
| Measurements BxHxT or DxT | M8x1 x 55.5mm |
| Housing material | 1.4304 |
| Material of sensing face | PBTP |
| Degree of protection | IP67IP |
| Connection | Cable |
| Cable type | LiYY-O |
| Schock: Halfsinus, 30 gn, 11ms | |
| Vibration: 55 Hz, 1mm Amplitude, 3 x 30 Minutes | |

Electrical Data

| | |
|-------------------------------------|---------------|
| Current type | DC |
| Wiring | 3-Wire |
| switching function | normally-open |
| Output signal | PNP |
| Rated operational voltage | 24 DCV |
| Rated operational current | 200mA |
| Supply voltage | 10...30 DCV |
| Ripple | ≤ 15% |
| max. switching frequency | 2000Hz |
| No-load supply current | ≤ 20/≤ 12mA |
| Off-state current | ≤ 80µA |
| Voltage drop | ≤ 1.5/-V |
| Short circuit protection | no |
| Protected against polarity reversal | yes |



Utilization categories
 Insulation class

DC 13

Datasheet number:

Definitions see general catalog.
 If not otherwise noted, ratings according to
 IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH
 Schurwaldstrasse 9
 73765 Neuhausen a.d.F.
 Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 04/2007

BALLUFF
 sensors worldwide