


**Inductive Sensors**  
**BES Q40KFU-PAC35E-S04G**  
**40 x 40 x 62**  
**Complementary**  
**Sn=35mm**  
**unshielded**  
**Factor 1, magnetic field immune**

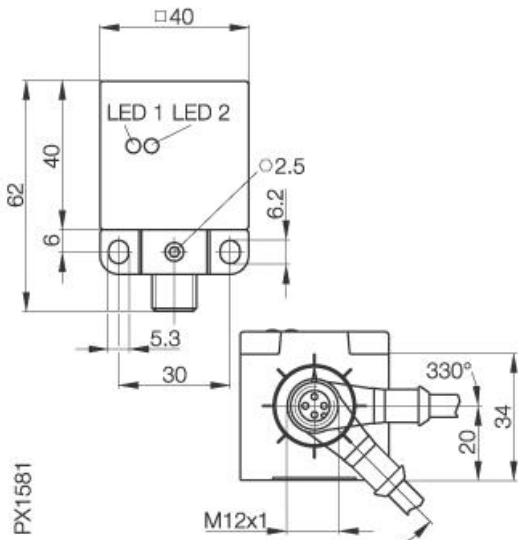

**Common Data**


Mounting in steel	unshielded
Rated operating distance Sn	35mm
Assured operating distance Sa	0...28,4mm
Repeatability R	≤ 5%
Hysteresis	≤ 15%
Power indication	yes
Function indication	yes
Ambient temperature range	-10...+70°C
Polution Degree	3
Time delay before availability	≤ 30ms
Particular characteristics	Factor 1, magnetic field immune

**Mechanical Data**

Measurements BxHxT or DxT	40 x 40 x 62mm
Housing material	PBT
Material of sensing face	PBT
Degree of protection	IP67IP
Connection	Connector S4 (M12)
Schock: Halbsinus, 30 gn, 11ms	
Vibration: 55 Hz, 1mm Amplitude, 3 x 30 Minutes	

**Electrical Data**

Current type	DC
Wiring	4-Wire
switching function	Complementary
Output signal	PNP
Rated operational voltage	24 DCV
Rated operational current	200mA
Supply voltage	10...30 DCV
Ripple	≤ 15%
max. switching frequency	250Hz
No-load supply current	≤ 20/≤ 15mA
Off-state current	≤ 80µA
Voltage drop	≤ 2.5/-V
Short circuit protection	yes
Protected against polarity reversal	yes

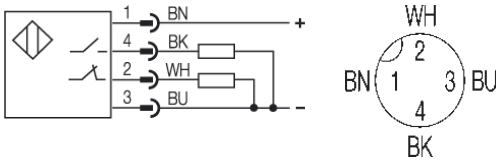

Utilization categories DC 13  
 Insulation class II

Datasheet number:

Definitions see general catalog.  
 If not otherwise noted, ratings according to IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH  
 Schurwaldstrasse 9  
 73765 Neuhausen a.d.F.  
 Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 04/2007

