


Accessories: Fiberoptic BFO 18A-LFF-MZG-10-

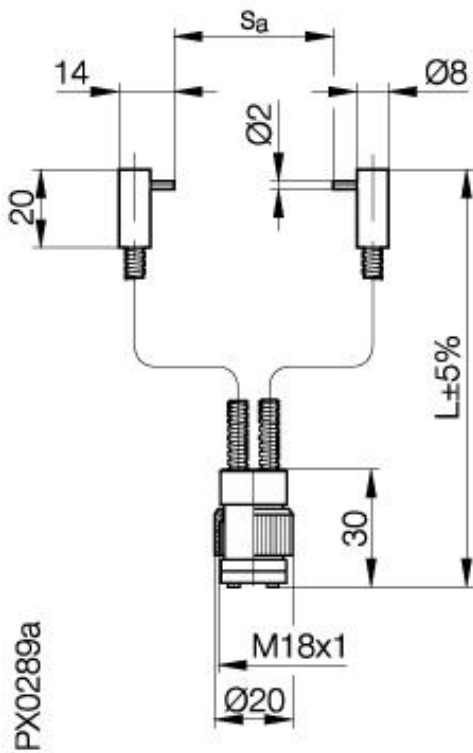

Common Data

Version
Usable with

Ambient temperature
Sensing range

Fiberoptic right angle, thru beam
in combination with diffuse
sensors M18
-20°C...+170°C
100mm

Mechanical Data

Measurements WxHxD or Dia x D
Material
Mounting
Diameter of glass fiber bundle
Max. pull force on cable
Least bending radius

M18
Glass, Corrugated metal jacket
with clamp D=8mm
1
80
60

Datasheet number::

Definitions see general catalog.
If not otherwise noted, ratings according to
IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH
Schurwaldstrasse 9
73765 Neuhausen a.d.F.
Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 04/2007

BALLUFF
sensors worldwide