


## Accessories: Fiberoptic BFO 18A-XAF-SMG-15-

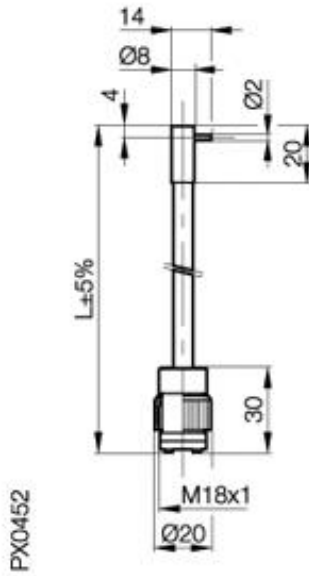

### Common Data

Version	Fiberoptic right angle
Usable with	in combination with diffuse sensors M18
Ambient temperature	-40°C...+150°C
Sensing range	Diffuse 10mm/ Refl. 300mm

### Mechanical Data

Measurements WxHxD or Dia x D	M18
Material	Glass, Silicon protective jacket with clamp D=8mm
Mounting	1,5
Diameter of glass fiber bundle	80
Max. pull force on cable	60
Least bending radius	60

Datasheet number::

Definitions see general catalog.  
If not otherwise noted, ratings according to IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH  
Schurwaldstrasse 9  
73765 Neuhausen a.d.F.  
Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 04/2007

**BALLUFF**  
sensors worldwide