


## Accessories: Fiberoptic BFO D22-LA-AD-EAK-52-02

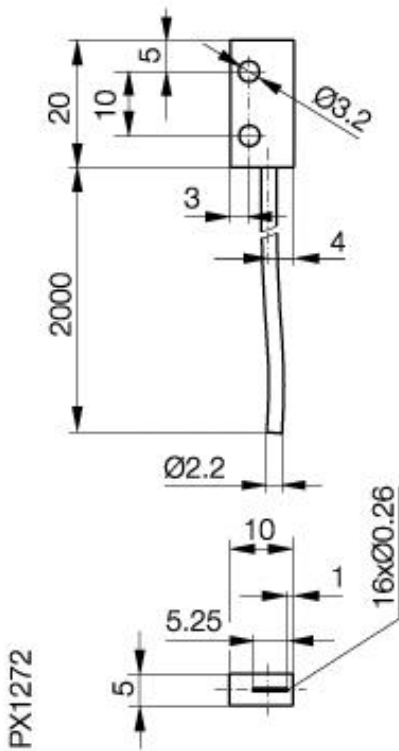

### Common Data

Version	Fiber optic light screen
Usable with	on BOS 15K..., BOS 20K..., BOS 74K..
Ambient temperature	-35°C...+65°C
Sensing range	100mm

### Mechanical Data

Measurements WxHxD or Dia x D	20x10x5
Material	brass, PE, PMMA, Aluminium
Mounting	with 2 screws M3
Diameter of glass fiber bundle	16x0,26
Max. pull force on cable	6
Least bending radius	25

Datasheet number::

Definitions see general catalog.  
If not otherwise noted, ratings according to IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH  
Schurwaldstrasse 9  
73765 Neuhausen a.d.F.  
Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 04/2007

**BALLUFF**  
sensors worldwide