


Accessories: Fiberoptic BFO D22-LA-BC-10

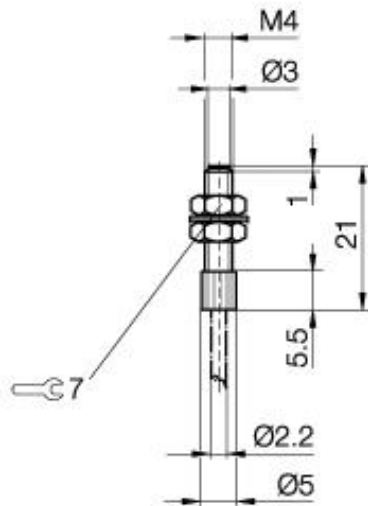

PX0981

Common Data

Version

Usable with

Ambient temperature

Sensing range

End fitting without lens

With fiber optic BFO D22-LD-EAK

-10-20

-40°C...+70°C

150mm

Mechanical Data

Measurements WxHxD or Dia x D

Material

Mounting

Max. pull force on cable

M4 x 21

stainless steel

with thread M4

6

Datasheet number::

Definitions see general catalog.

If not otherwise noted, ratings according to
IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH
Schurwaldstrasse 9
73765 Neuhausen a.d.F.
Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 04/2007

BALLUFF
sensors worldwide