


Accessories: Connectors BKS-B 25-3-PU-

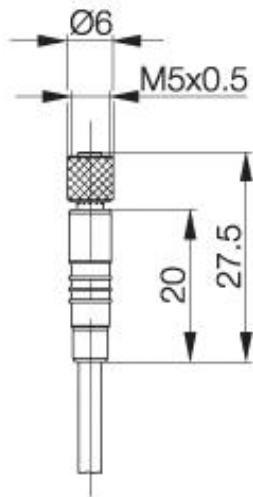

PX1726

Common Data


Version	Connector, straight, 4-pins
Usable with	on Sensors with connection S26 (DC, NO/NC, M5)
Ambient temperature	-25°C...+85°C

Mechanical Data

Measurements WxHxD or Dia x D	27,5x6
Material	Polyether TPU (PU) / PUR
Protection class per IEC 60529	IP67
Cable version	molded-on, LifY-Y-11Y-0
Conductor cross section	4x0,14

Electrical Data

Supply voltage	30 AC/DC
----------------	----------



Datasheet number::

Definitions see general catalog.
If not otherwise noted, ratings according to IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH
Schurwaldstrasse 9
73765 Neuhausen a.d.F.
Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 04/2007

BALLUFF
sensors worldwide