


## Accessories: Connectors BKS-S 48-1-GS49-PU-

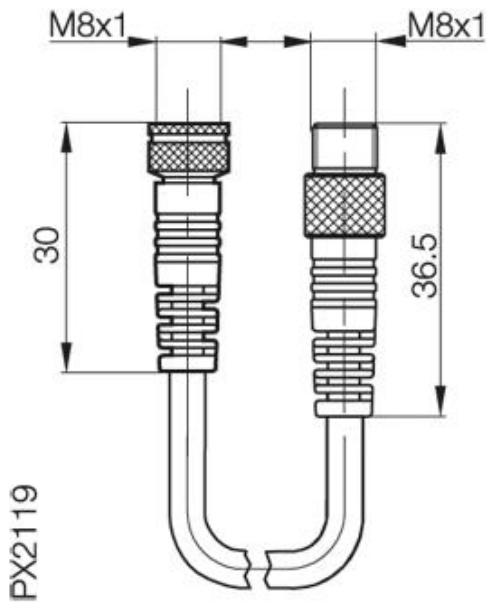

### Common Data

Version  
Usable with  
Manufacturer  
Ambient temperature

Connection cable, straight, 3-pins  
on Sensors with connection S49  
(DC, M8)  
Lumberg  
-25°C...+80°C

### Mechanical Data


Measurements WxHxD or Dia x D  
Material  
Protection class per IEC 60529  
Cable version  
Conductor cross section

30xØ10 + 36xØ10  
Housing Polyester TPU  
IP67  
fully potted, Li9YH-11YH  
3 x 0,34mm<sup>2</sup>

### Electrical Data

Supply voltage

10...30V DC



Datasheet number::

Definitions see general catalog.  
If not otherwise noted, ratings according to  
IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH  
Schurwaldstrasse 9  
73765 Neuhausen a.d.F.  
Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 04/2007

**BALLUFF**  
sensors worldwide