


Accessories: Connectors BKS-S 82-00

PX1233a

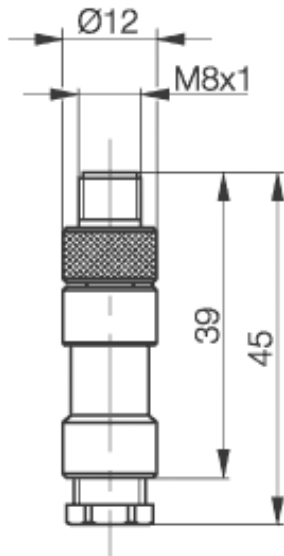

Common Data


Version	Connector , straight, 3-pin,
Usable with	on Sensors with connection S49 (DC, M8)
Manufacturer	Binder
Ambient temperature	-40°C...+85°C
Function display	no
Supply voltage display	no

Mechanical Data

Measurements WxHxD or Dia x D	45x $\text{Ø}12$
Material	Housing Polyester TPU
Protection class per IEC 60529	IP67
Cable version	for user assembly
Conductor cross section	3 x max.0,25mm ²

Electrical Data

Supply voltage	10...30VDC
----------------	------------



Datasheet number::

Definitions see general catalog.
If not otherwise noted, ratings according to
IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH
Schurwaldstrasse 9
73765 Neuhausen a.d.F.
Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 04/2007

BALLUFF
sensors worldwide