


Accessories: Connectors BKS-S150-00

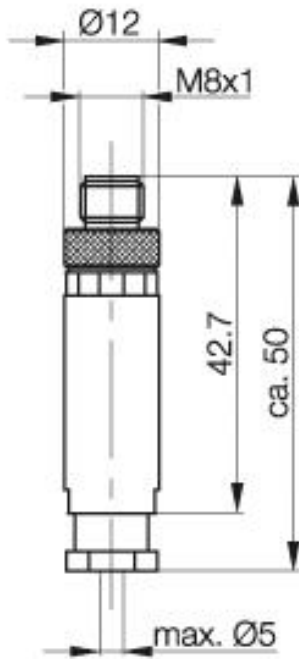

Common Data

| | |
|---------------------|---|
| Version | Connector, straight, 4-pin |
| Usable with | on Sensors with connection S75 (DC, M8) |
| Manufacturer | Binder |
| Ambient temperature | -40...+85°C |


Mechanical Data

| | |
|--------------------------------|---------------------------------|
| Measurements WxHxD or Dia x D | 50xØ12 |
| Material | Body PBT/PA/nickel plated brass |
| Protection class per IEC 60529 | IP67 |
| Cable version | for user assembly |
| Conductor cross section | 4x0,14...0,5mm ² |
| Mounting | Screwed terminal |

Electrical Data

| | |
|----------------|-------------|
| Supply voltage | 10...30V DC |
|----------------|-------------|

PX2138



Datasheet number::

Definitions see general catalog.
If not otherwise noted, ratings according to
IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH
Schurwaldstrasse 9
73765 Neuhausen a.d.F.
Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 04/2007

BALLUFF
sensors worldwide