



**Magnetic Field Sensors**  
**BMF 305K-NS-C-2-PU-05**  
**33,5x10,5x6,5**  
**Short circuit protection**

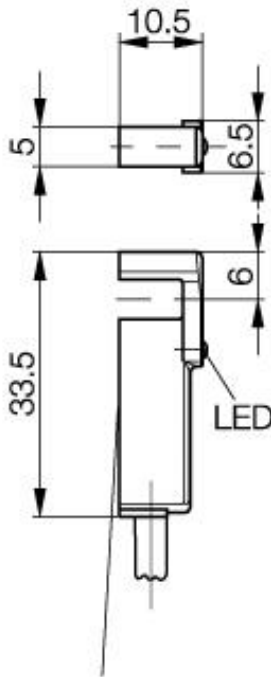

PX1241



**Common Data**

Rated operating field strength	1,2kA/m
Assured operating field strength	2kA/m
Repeatability R	1% v. Hn
Hysteresis	45% v. Hn
Function indication	yes
Ambient temperature range	-25...+70°C
Temp.Drift from Switch. Pnt	0,3%/°C v. Hn

**Mechanical Data**

Measurements BxHxT oder DxT	33,5x10,5x6,5mm
Housing material	LCP
Material of sensing face	PU
Degree of protection	IP67IP
Connection	Cable
Cable type	LifY-Y-11Y-O

**Electrical Data**

Current type	DC
Wiring	3-Wire
switching function	normally-open
Output signal	NPN
Rated operational voltage	24 DCV
Rated operational current	200mA
Supply voltage	10...30V
Ripple	≤15% v. Ub
Rated supply frequency	DCHz
No-load supply current	≤30mA
Off-state current	≤ 80μA
Maximum operational current	200mA
Voltage drop	≤ 3.1/-V
Switch-On-Delay	0,05ms
Switch-Off-Delay	0,05ms
Short circuit protection	yes
Protected against polarity reversal	yes



Datasheet number:

Definitions see general catalog.  
 If not otherwise noted, ratings according to  
 IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH  
 Schurwaldstrasse 9  
 73765 Neuhausen a.d.F.  
 Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 04/2007

**BALLUFF**  
 sensors worldwide