


Magnetic Field Sensors
BMF 305K-R-PS-F-3-03
33,5x10,5x6,5

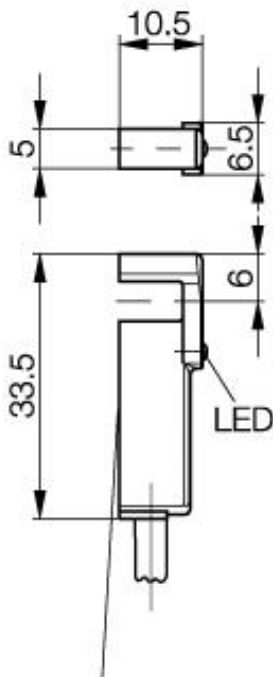

PX1241

Common Data


Function indication	yes
Ambient temperature range	-25...+70°C
Particular characteristics	Reed-Switch

Mechanical Data

Measurements BxHxT oder DxT	33,5x10,5x6,5mm
Housing material	LCP
Degree of protection	IP65IP
Connection	Cable
Cable type	PVC

Electrical Data

Current type	DC
Wiring	3-Wire
switching function	normally-open
Output signal	PNP
Rated operational voltage	24 DCV
Rated operational current	500mA
Supply voltage	10...30V
Ripple	≤ 15% v. Ub
Rated supply frequency	DChz
Maximum operational current	500mA



Datasheet number:

Definitions see general catalog.
 If not otherwise noted, ratings according to
 IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH
 Schurwaldstrasse 9
 73765 Neuhausen a.d.F.
 Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 04/2007

