


Magnetic Field Sensors
BMF 305K-R-US-L-3-03
33,5x10,5x6,5

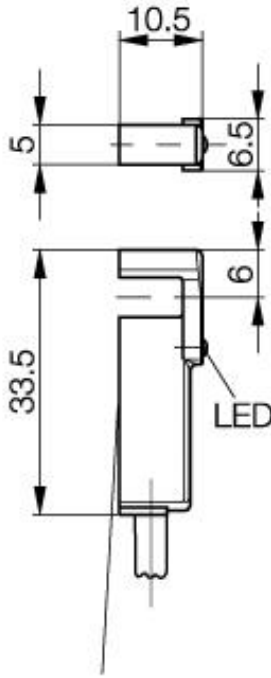

PX1241

Common Data


Function indication	yes
Ambient temperature range	-25...+70°C
Particular characteristics	Reed-Switch

Mechanical Data

Measurements BxHxT oder DxT	33,5x10,5x6,5mm
Housing material	PA
Material of sensing face	PU
Degree of protection	IP65IP
Connection	Cable
Cable type	PVC

Electrical Data

Current type	AC/DC
Wiring	2-Wire
switching function	normally-open
Rated operational voltage	24 DCV
Rated operational current	128 at 24V, 48V at 230VmA
Supply voltage	10...30V
Rated supply frequency	DCHz
No-load supply current	min. 3mA
Switch-On-Delay	0,7ms
Switch-Off-Delay	0,2ms
Short circuit protection	no
Protected against polarity reversal	no

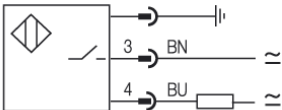

Datasheet number:

Definitions see general catalog.
 If not otherwise noted, ratings according to
 IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH
 Schurwaldstrasse 9
 73765 Neuhausen a.d.F.
 Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 04/2007

BALLUFF
 sensors worldwide