

**Photoelectric Sensor**  
**BOS 2K-PS-PR10-00,2-S49**  
**Sn=3000mm**  
**Retroreflective**

**Common Data**


Series	2K
Sensortype	Retroreflective
Switching frequency	800 Hz
Rated operating distance Sn in mm	3000
Indication Switching element on	yes, yellow LED
Ambient temperature	-20...+50°C
On-delay	<0,6ms
Light	Red light, 660nm
Diameter of active zone	10mm at 100mm
Permissible ambient light	per EN 60947-5-2
Output function	dark-on

**Mechanical Data**

Measurements	25,1 x 7,6 x 12,6
Shock	Halfsinus, 30gn, 11ms
Vibration	10...55Hz, 1,5mm Amplitude 3x2h
Housing material	ABS
Material of sensing face	PMMA
Degree of protection	IP67
Connection	Connector S49 (M8,3-pin)
Weight	20g
Recommended connector	BKS-S48

**Electrical Data**

Current	DC
Switching function	normally-open
Output	PNP
Rated operational voltage Ue	24
Rated operational current Ie	<50mA
Supply Voltage	10...30V DC
Ripple	< 5% from UB
Frequency of Supply Voltage	DC
No-load supply current	<20mA
Voltage drop	≤2,5V
Short protection	yes
Protected against polarity reversal	yes

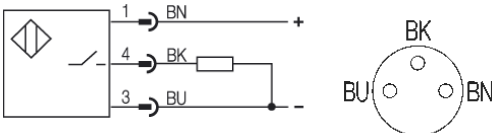

Utilization categories  
 Insulation class

III

Datasheet number:

Definitions see general catalog.  
 If not otherwise noted, ratings according to  
 IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH  
 Schurwaldstrasse 9  
 73765 Neuhausen a.d.F.  
 Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 04/2007

**BALLUFF**  
 sensors worldwide