

Mass Flow Controller (MFC) for gases



- Bypass MFC with CMOSens® technology for nominal flow rates from 20 ml_N/min to 50 l_N/min
- High accuracy
- Fast settling time

Type 8711 can be combined with...



Type 1150

Multi-channel programme controller



Type 0330

3/2 or 2/2-way valve



Type 6013

2/2-way valve



MFC

Configuration software

Type 8711 is a unit for the control of the mass flow of gases that is relevant for most applications in Process Technology. The measured value provided by the sensor (see the description on page 2) will be compared in the digital regulation electronics with the predefined set point according to the signal; if a control difference is present, the control value output to the proportional valve will be modified using a PI-control algorithm. Due to the fact that the sensor is directly in the bypass channel a very fast settling time of the MFC is reached. In this way, the mass flow can be maintained at a fixed value or a predefined profile can be followed, regardless of pressure variations or other changes in the system. Type 8712 can optionally be calibrated for two different gases, the user is able

to switch between these two gases. As the control element, a proportional valve working at low friction guarantees a high sensitivity and the good control characteristics of the unit. Typical application areas are gas dosing or rather the production of gas mixtures in:


- Process technology
- Packaging and foodstuff industry
- Environmental technology
- Surface treatment
- Material coating
- Burner controllers
- Fuel cell technology

Technical data	
Full scale ranges¹⁾ (Q _{nom})	0.02 to 50 l _N /min N ₂ equivalent
Operating media	neutral, non-contaminated gases, other gases on request
Max. operating pressure (inlet pressure)	10 bar (145 psi) depending on the orifice of the valve
Calibration medium	operating gas or air with conversion factor
Medium temperature	-10 to +70°C
Ambient temperature	-10 to +50°C
Accuracy (after 1 min. warm up time)	± 0.8% of Rdg. ± 0.3% F.S.
Linearity	± 0.1% F.S.
Repeatability	± 0.1% F.S.
Control range	1:50, 1:500 on request
Settling time (t_{95%})	< 300 ms
Body material	aluminium
Electr. housing material	chromium plated steel sheet
Sealing material	FPM, EPDM, others on request
Port connections	G 1/4 or screw-in fitting, others on request
Control valve (proportional valve)	valve is closed when power is off
valve orifice	0.05 to 1.6 mm
k _{vs} -value	0.0002 to 0.05 m ³ /h
Electr. connection	15-pin sub-D plug
Power supply	24V DC
Voltage tolerance	± 10%
Residual ripple	< 5%
Power consumption	max. 400 mA at 24V DC
Set point Feed impedance	0-5 V, 0-10 V, 0-20 mA or 4-20 mA > 20 kΩ (voltage), < 300 Ω (current)
Output signal Max. current, volt. output Max. load, current output	0-5 V, 0-10 V, 0-20 mA or 4-20 mA 10 mA 600 Ω
Digital communication	RS232 or RS485, adapter needed
Protection class	IP50
Dimensions [mm] (without fitting)	107 x 114 x 28 mm
Total weight	ca. 1000 g
Mounting position	horizontal or vertical
Light emitting diode display (default, other allocations possible)	indication for Power, Limit, Error
Binary input (default, other functions possible)	two 1. start autotune 2. not assigned
Binary output (default, other functions possible)	one relay-output for 1. setpoint not reached max. load: 25V, 1A, 25VA
Certification (see operating instructions)	various environmental testing, electromagnetic compatibility

¹⁾ at standard conditions 1.013 bar(a) and 273 K

Technical data

Functional principle of the registration of the measured values

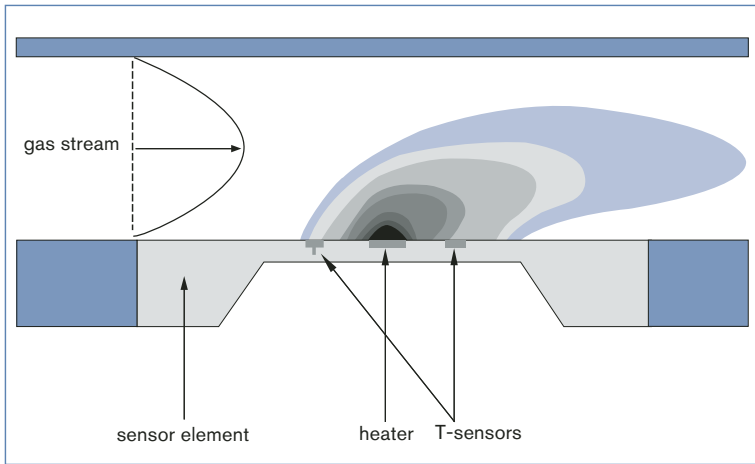

The actual flow rate is detected by a sensor operating according to a thermal principle which has the advantage of delivering the mass flow without any corrections for pressure or temperature being needed.

A small part of the total gas stream is diverted into a small, specifically designed bypass channel, that ensures laminar flow conditions. The sensor element is a chip immersed into the wall of this channel. The chip, produced in CMOS technology, contains a heating resistor and two temperature sensors (thermopiles) being arranged symmetrically upstream and downstream of the heater. The differential voltage of the thermopiles is a measure of the mass flow rate passing this bypass channel. The calibration procedure effectuates a unique assignment of the sensor signal to the total flow rate passing the device.


Notes regarding the selection of the unit

For the proper choice of the actuator orifice within the MFC, not only the required maximum flow rate Q_{nom} , but also the pressure values *directly* before and after the MFC (p_1, p_2) at this flow rate Q_{nom} should be known. In general, these pressures are not the same as the overall inlet and outlet pressures of the whole plant, because usually there are additional flow resistors (tubing, additional shut-off valves, nozzles etc.) present both before and after the controller. Please use the specification sheet (p. 4) to indicate the pressures


directly before and after the MFC. If these should be unknown or not accessible to a measurement, estimates are to be made by taking into account the approximate pressure drops over the flow resistors before and after the MFC, respectively, at a flow rate of Q_{nom} . In addition, please quote the maximum inlet pressure p_{1max} to be encountered. This data is needed to make sure the actuator is able to provide a close-tight function within all the specified modes of operation.

► The questionnaire on page 4 contains the relevant fluid specification. Please use in this way the experience of Burkert engineers already in the design phase and provide us with a copy of the questionnaire containing the data of your application together with your inquiry or order.

Dimensions [mm]

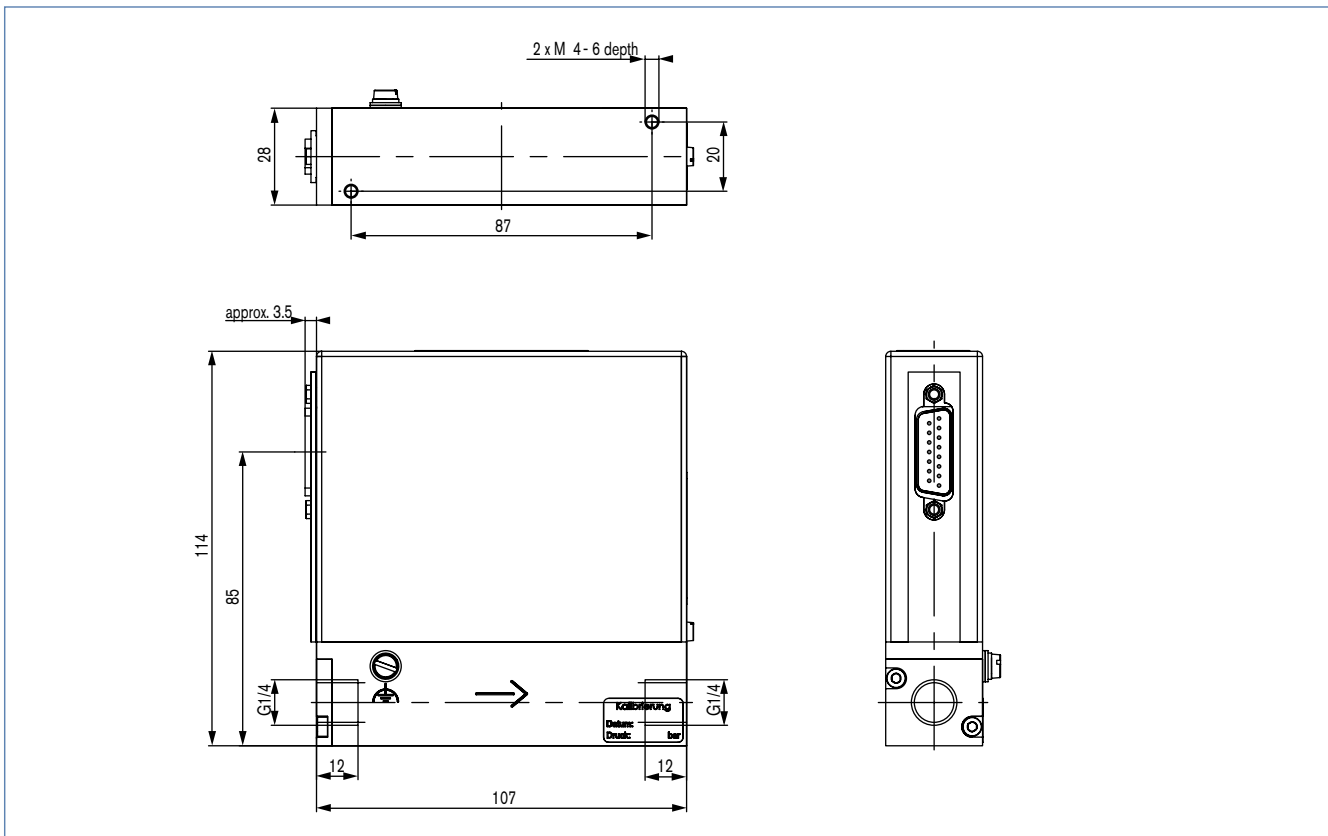

PIN configuration

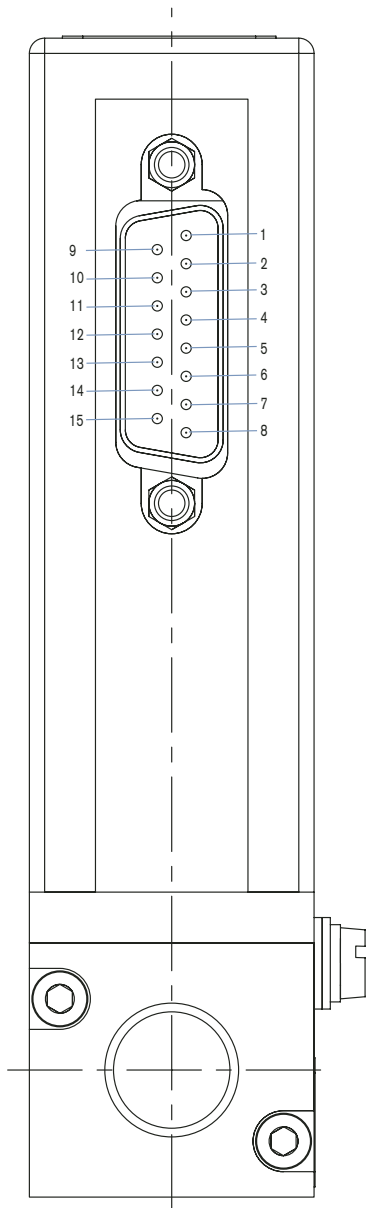

15-pin sub-D plug

Pin	Connection
1	relay, NC contact
2	relay, NO contact
3	relay, C contact
4	GND 24V-supply and binary inputs
5	supply +24V
6	8V output (only internal company use)
7	set-value input GND
8	set-value input +
9	actual value output GND
10	actual value output +
11	DGND (for RS232)
12	binary input 1
13	binary input 2
14	RS232 RxD (without driver)
15	RS232 TxD (without driver)

Ordering table for accessories (connectors are not included in the delivery)

Article	Item no.
15-pin electrical connection	
Sub-D plug 15-pin solder connection	918 274
Sub-D hood for Sub-D socket, with screw locking	918 408
Sub-D plug 15-pin with 5m cable, ass. on one side	787 737
Sub-D plug 15-pin with 10m cable, ass. on one side	787 738
Adapter	
RS232-adapter – for connection to a PC	654 748
PC cable for RS232 9-pin socket/plug 2m	917 039
Adapter RS485	654 538
Communication software "MassFlowCommunicator"	Info at www.burkert.com

Specification sheet for MFC/MFM applications

- Please fill out and send to your local Burkert Sales Centre via e-mail, fax or regular post together with your inquiry or order

<input type="checkbox"/> MFC-application	<input type="checkbox"/> MFM-application	<input type="text"/> Quantity	<input type="text"/> Desired delivery date
Medium data			
Type of gas (or gas proportion in mixtures)	<input type="text"/>		
Density [kg/m ³] ¹⁾	<input type="text"/>		
Medium temperature [°C or °F]	<input type="text"/> °C	<input type="text"/> °F	
Moisture content [g/m ³]	<input type="text"/>		
Abrasive components/solid particles	<input type="checkbox"/> no	<input type="checkbox"/> yes, as follows <input type="text"/>	
Fluidic data			
Maximum flow Q_{nom}	<input type="text"/> l _N /min ¹⁾	<input type="text"/> cm _N ³ /min ¹⁾	
	<input type="text"/> m _N ³ /h ¹⁾	<input type="text"/> cm _s ³ /min (sccm) ²⁾	
	<input type="text"/> kg/h	<input type="text"/> l _s /min (slpm) ²⁾	
Minimum flow Q_{min}	<input type="text"/> l _N /min ¹⁾	<input type="text"/> cm _N ³ /min ¹⁾	
	<input type="text"/> m _N ³ /h ¹⁾	<input type="text"/> cm _s ³ /min (sccm) ²⁾	
	<input type="text"/> kg/h	<input type="text"/> l _s /min (slpm) ²⁾	
Inlet pressure at Q_{nom}	$p_1 =$ <input type="text"/> barg or	<input type="text"/> psig	<input type="checkbox"/>
Outlet pressure at Q_{nom}	$p_2 =$ <input type="text"/> barg or	<input type="text"/> psig	<input type="checkbox"/>
Max. inlet pressure p_{1max}	<input type="text"/> barg or	<input type="text"/> psig	<input type="checkbox"/>
Pipe run (external-Ø)	<input type="text"/> metric, mm	<input type="text"/> imperial, inch	
MFC/MFM-port connection (1/4"-internal thread or screw-in fitting)	<input type="checkbox"/> without screw-in fitting <input type="checkbox"/> G-thread (DIN ISO 228/1) <input type="checkbox"/> NPT-thread (ANSI B1.2) <input type="checkbox"/> with screw-in fitting		
Ambient temperature	<input type="text"/> °C		
Material data			
Body material	<input type="checkbox"/> Stainless steel		
Sealing material	<input type="checkbox"/> FPM (Viton) <input type="checkbox"/> EPDM Other: <input type="text"/>		
Electrical data			
Output/input signal	<input type="checkbox"/> 0–20 mA/0–20 mA	<input type="checkbox"/> 4–20 mA/4–20 mA	
	<input type="checkbox"/> 0–10 V/0–10 V	<input type="checkbox"/> 0–5 V/0–5 V	
<input type="checkbox"/> Please quote all pressure values as overpressures with respect to atmospheric pressure [barg]			

1) at: 1.013 bar(a) and 0°C

2) at: 1.013 bar(a) and 20°C

- Please do not forget to fill in the customer data below

Company	Contact person
Customer No.	Department
Address	Tel./Fax
Postcode/Town/Country	E-mail