

JUMO mTRON Relay module

for stock items
see price list

Brief description

The unit is a module of the JUMO mTRON control and automation system. The plastic housing measures 91 mm x 85.5mm x 73.5mm (W x H x D) and is mounted on a standard rail.


In addition to direct operation through logic network variables there is a facility for limit comparator functions with delays and latching. The module can also convert analogue operating signals into quasi-analogue pulse trains for operating output devices. Functions such as pulse width modulation, pulse frequency modulation and actuator driver are provided.

The module has a total of 4 switching outputs (relay, logic or solid-state relay output) which can be operated via the LON¹ bus.

The module incorporates a network connection for communication and data interchange between the modules. A screened twisted pair is used as transmission line.

There is a setup interface for module parameter setting and configuration from a PC under the JUMO mTRON-iTOOL project design software. The electrical connections are made through plug-in connectors with screw terminals.

Block structure

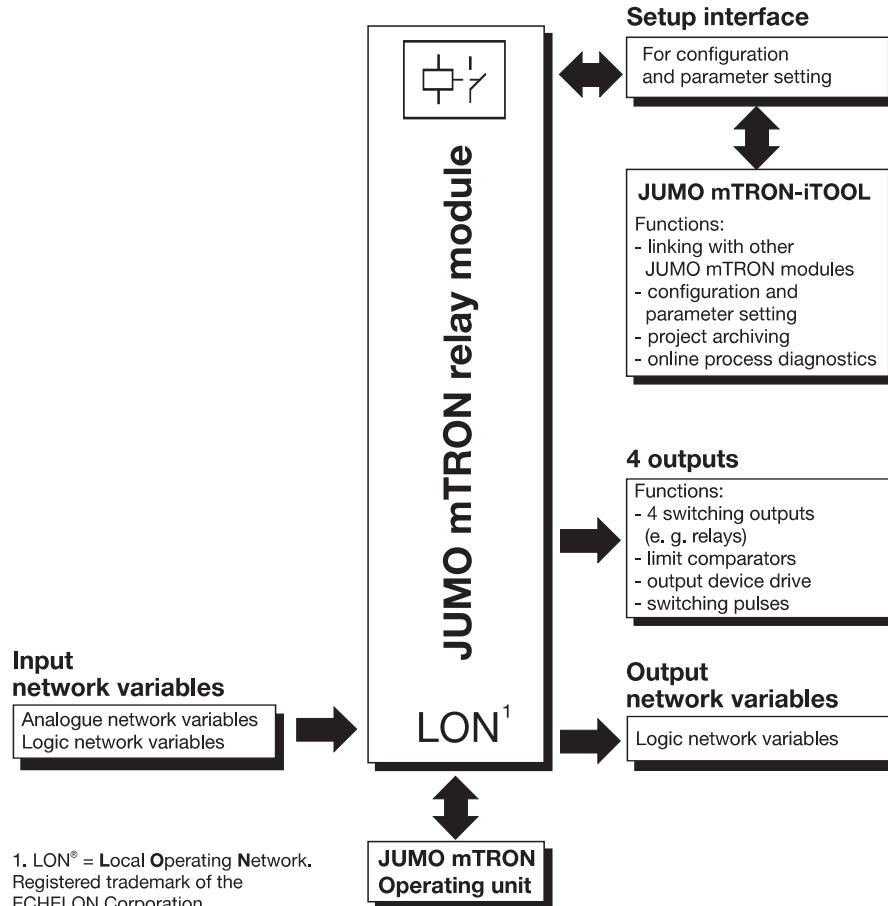

Type 704015/0-...

Features

- Limit comparators**
Comparator and window functions, direct or reversed, with switch-on and switch-off delay, also latching and gate circuit
- Pulse width modulation**
PD controller converting the analogue control signals into switching pulses for operating contactors and solenoid valves
- Pulse frequency modulation**
This function converts analogue control signals into switching pulses for operating dosing pumps, for example
- Actuator driver**
Controller for operating actuating motors with position retransmission
- Setup interface**
For configuration and setting of parameters the module is linked to a PC via a PC interface
- Plug & Play function**
Problem-free replacement of modules without re-configuration

Displays and controls

(1)	Status LED, yellow for the logic outputs K1to K4; lights up when relay is energised or logic output is activated	(4)	Installation key the module reports to the JUMO mTRON-iTOOL project design software or operating unit	(5)	Setup interface for the PC interface line which links the module to the PC
(2)	Service LED, red - lights up on operating fault - flashes when the mechanical connection to the module from JUMO mTRON-iTOOL or the operating unit is being checked by a test signal ("wink") - long flashing pulses (3 sec on/1sec off) when a Plug & Play fault occurs	(6)	Power LED, green lights up when the supply is switched on	(1)	(1)
(3)	Switch for the termination resistance of the LON network	(1)	(1)	(1)	(1)
(2)	(1)	(1)	(1)	(1)	(2)
(3)	(1)	(1)	(3)	(4)	

Technical data

Hardware outputs

Functions:

- direct relay outputs
- limit comparator output
- actuator driver outputs
- pulse width outputs
- pulse frequency outputs

Relay outputs

Type: n.o. (make) contact

Nominal voltage: 250V

Nominal current: 3A

Rating: 3A, 250V AC, resistive load

Life: $5 \cdot 10^5$ operations
on resistive load

Contact material: AgCdO
(hard gold plated)

Minimum load: 10mA 5V DC

Solid-state relay output

Type: 1A 250V AC

Logic output

Type: 0/12V

Internal resistance: 600Ω

Input network variables

Analogue network variables

Functions:

- input variables
for the limit comparators,
pulse width modulation,
pulse frequency modulation and
actuator driver

Sampling time

210msec

Logic network variables

Functions:

- direct relay operation
- gate circuit for the limit comparators
- latch reset
- actuator driver switch-off

Output network variables

Logic network variables

Output cycle: controlled by event,
but at least every 6.3sec

Functions:

- monitoring function for the
network inputs (combined alarm)
- output of the relay states

General data

Environmental conditions to EN 61 010

Operating and ambient temperature:

0 – 55 °C

Permitted storage temperature:

-40 to+70 °C

Relative humidity: rH 80 % max.

Pollution degree 2

Oversupply category 2

Housing

Material: plastic, self-extinguishing

Flammability Class: UL 94 VO

Protection: IP20 (to EN 60 529)

Mounting: on standard rail

Supply

110 – 240V AC +10/-15%, 48 – 63Hz,
or 20 – 53V AC/DC, 48 – 63Hz

Power consumption: 5 VA max.

Network (LON interface)

Transceiver: free topology FTT-10A

Topology: ring, star, line or mixed
structure

Baud rate: 78 kbaud

Max. lead length (depending on lead type):
line: 2700 m
star: 500 m
ring: 500 m
mixed: 500 m


Max. number of modules: 64

Operation and project design

Operation, parameter setting and configuration of JUMO mTRON modules can be carried out from the JUMO mTRON operating unit.

The JUMO mTRON-iTOOL project design software permits convenient design and start-up of a JUMO mTRON system.

The projects can be archived and documented. Individual modules are linked via LON by assigning network variable (NV) names.

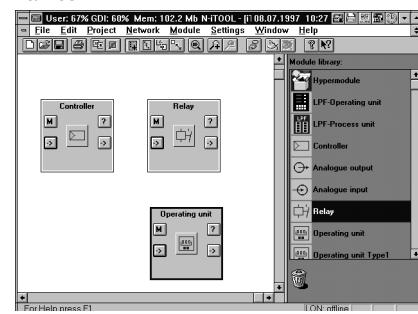



Connection diagram

Module underside with plug-in connectors		Connection diagram														
		Connector I								Connector II						
Connector I																
Connection for	Terminals	Output 1	Output 2	Output 3	Output 4	Notes		Diagram								
Outputs																
Relay 3A, 250V AC, resistive load	I_1 I_2	I_3 I_4	I_5 I_6	I_7 I_8		P = common S = n.o. (make)										
Logic output 12V 20mA	I_1 I_2	I_3 I_4	I_5 I_6	I_7 I_8		-										
Solid-state relay output 250V 1A	I_1 I_2	I_3 I_4	I_5 I_6	I_7 I_8												
Supply as label	AC			DC												
	I_L1 line I_N neutral			I_L1 } any I_N } polarity												
	I_TE technical earth			I_TE technical earth												

Connector II

Connection for	Terminals	Notes	Diagram
LON interface	II_13 = TE	screen	
	II_14 = Net_A II_15 = Net_B	any polarity	

Dimensions

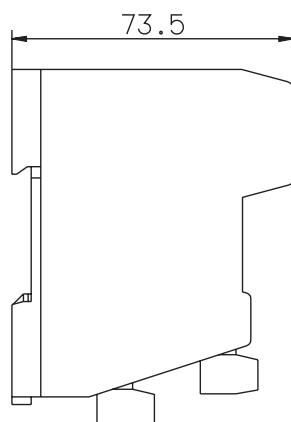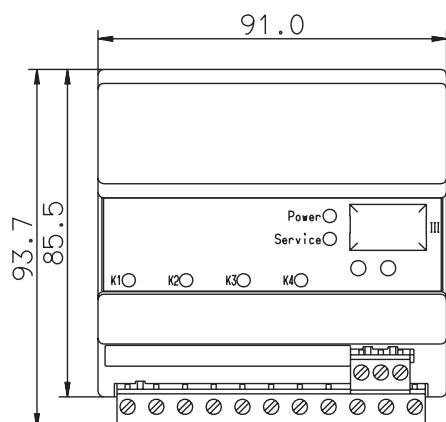

mm	inch
73.5	2.89
85.5	3.37
91.0	3.58
93.7	3.69

Ordering details

(1) (2)
704015/0- -

(1) Outputs

Standard version

Outputs	Code
4 relays (n.o.make)	154
4 logic outputs 12V 20mA	165
4 solid-state relay outputs 250V 1A	170

Special version **999**

Factory-configured to customer specification. Please specify type of outputs in plain language.

(2) Supply

Type	Code
110 – 240V AC +10/-15%, 48 – 63Hz	23
20 – 53V AC/DC, 48 – 63Hz	22

Standard accessory

1 Installation Instructions M 70.4015

Accessories

PC interface

with TTL/RS232C converter

for connecting the module to a PC,
length 2m.

Sales No. 70/00301315

Project design software

JUMO mTRON-iTOOL


Using the JUMO mTRON-iTOOL project design software the modules can be designed graphically on the PC. The user is able to link modules of the JUMO mTRON family and to configure the application-specific parameters.

System Manual JUMO mTRON

Documentation of configuration, parameter setting and installation of the modules.

Sales No. 70/00334336

Isolation

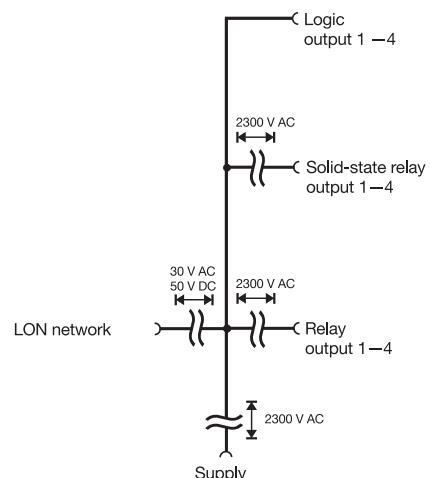

JUMO mTRON modules

Controller module

Data Sheet 70.4010

Relay module

Data Sheet 70.4015

Analogue input module

Data Sheet 70.4020

Analogue output module

Data Sheet 70.4025

Logic module

Data Sheet 70.4030

Operating unit

Data Sheet 70.4035

Communication module

Data Sheet 70.4040

Project design software

JUMO mTRON-iTOOL

Data Sheet 70.4090