


POCKET PC FOR DATALOGGER




Features

- Pocket PC Yakumo Delta, only 125 grams - fits in every bag!
- All STS-Datalogger may be configured
- Easy "one button"-handling
- Most important information on screen for quick overview
- Simple data read out
- Expansion and upgrading as easy as slipping a Flash card into the slot
- Including all necessary components

Software description


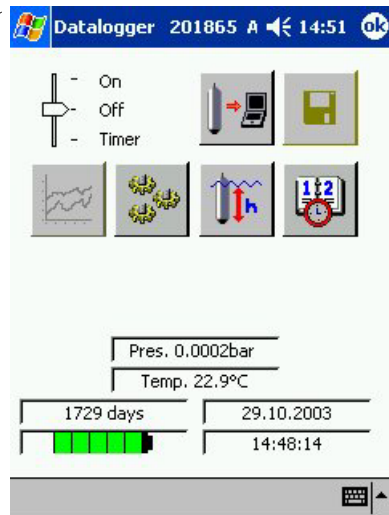


Standard operating with full function

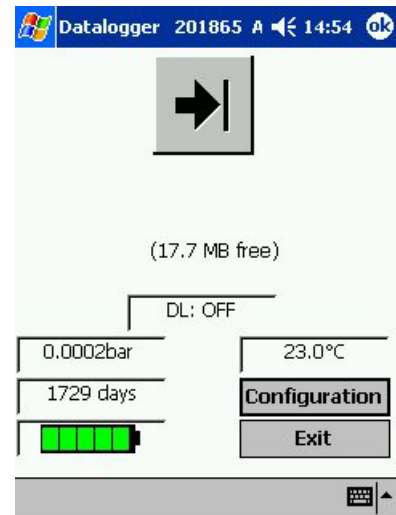



Simple one-button operating

- Operating-mode selectable (full function/one-button)
- Indication of actual pressure, temperature, time and estimated battery life time
- Datalogger-status: on/off
- Take instant readings
- Easy understandable icons display status
- Easy readout of available memory

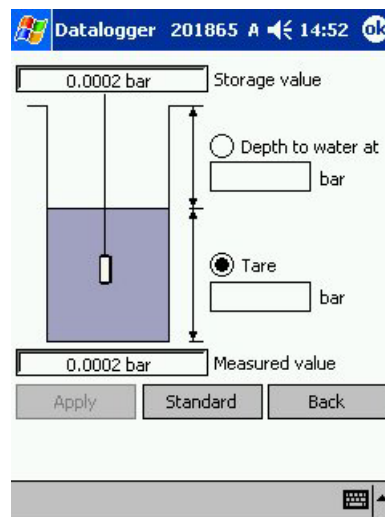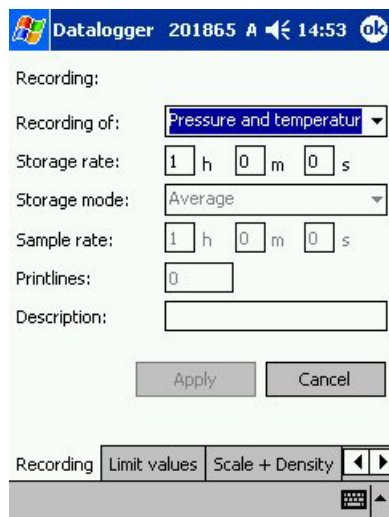

Configuration of Datalogger e.g. storage rate, sample rate, offset (tare) etc.

- Easy setting of limit values
- Assign an identification to each Datalogger

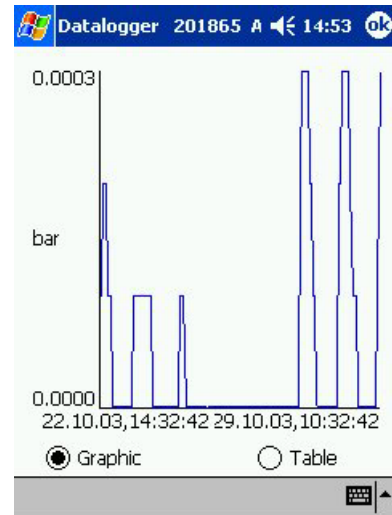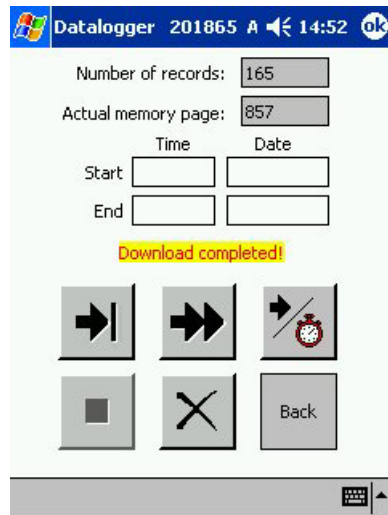

Data read out

Graphical profile or table of pressure readings

- "Smart" data-download features readout of most recent data, saving you time
- Capacity of SD-Card for data of min. 30 Dataloggers



	A	B	C	D
1	Description: STS Datalogger	SN/TD: 235301 ZY-186	Firmware: 4.28	
2	Minimum 9.534 mH2O	Maximum 11.847 mH2O	Average 9.640 mH2O	
3	Time	Date	Pressure	Temperature
4	16:15:50	30.10.2003	9.534	27.6
5	16:15:52	30.10.2003	9.534	27.6
6	16:15:54	30.10.2003	9.534	27.6
7	16:15:56	30.10.2003	9.534	27.6
8	16:15:58	30.10.2003	9.586	27.7
9	16:16:00	30.10.2003	9.539	27.7

Data may be stored on the desktop PC via docking station (cradle), where all data may be processed in Excel-program or similar.

Technical data

CPU	Intel PXA 250 - 200 MHz
Memory	RAM: 64 MB SDRAM - 36 MB user accessible ROM: 32 MB SD-Card: 64 MB Flash (for DL-software and data)
Display	3.5" touchpad color LCD
Operating system	Microsoft Pocket PC 2002 Premium Edition
Interfaces	Consumer IR AC-jack Jack for headphones Slot for SD Memory Cards
Battery	Li-Ion Akku, 900 mAh (non-changeable) 8 hours (active use)
Dimensions	121,7 x 76,8 x 11 mm
Weight	120 g

Content




- 1) Leather bag for Pocket PC
- 2) Pocket PC
- 3) Power pack
- 4) Docking station (cradle)
- 5) 12V car adapter cable
- 6) USB cable
- 7) RS 232 cable
- 8) Yakumo CD No. 1 (with drivers and instructions)
- 9) Datalogger readout cable
- 10) Memory card (with DL software)
- 11) STS CD (with additional software)
- 12) Yakumo CD No. 2 (with additional software)
- 13) Yakumo registration card, protective files and instruction sheet

Order number: VART261

Accessories



Weather protection for use in wet or dirty environment.
ART01607

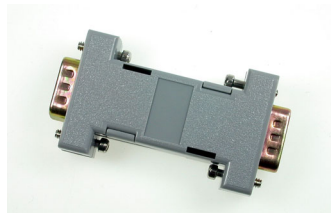

Nullmodem to connect the Pocket PC with DL/Display
VART183



Infrared communication cable for DL with Display
VART144

Contact

Please contact us or visit our website:

www.sts-ag.ch

Specifications may change without notice.

DED037A

Release 10/2003

Switzerland

STS Sensor Technik Sirnach AG
Rüthhofstrasse 8
CH - 8370 Sirnach
Phone: +41 (0) 71 969 49 29
Fax: +41 (0) 71 969 49 20
e-mail: sales@sts-ag.ch
Internet: www.sts-ag.ch

Germany

STS Sensoren Transmitter Systeme GmbH
Mercedesstrasse 1
D - 71063 Sindelfingen
Phone: +49 (0) 7031 811 920
Fax: +49 (0) 7031 811 958
e-mail: sts.gmbh@t-online.de
Internet: www.sts-ag.ch

Italy

STS Italia s.r.l.
Via Gesù 5
I - 20090 Opera (MI)
Phone: +39 02 57607073/074
Fax: +39 02 57607110
e-mail: stsopera@tin.it
Internet: www.sts-ag.ch

France

STS France
66, Avenue de la Gare
FR - 74100 Annemasse
Phone: +33 (0)4 5037 6925
Fax: +33 (0)4 5039 4225
e-mail: info@stsfrance.fr
Internet: www.sts-ag.ch