


Accessories: Signal adapter BOS S-C01

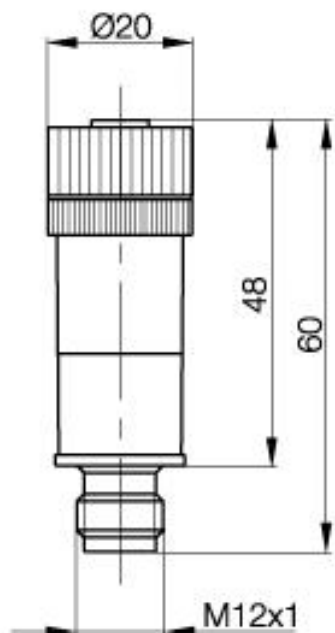

PX1583a

Common Data


Version	Signal adapter
Usable with	Programmable pulse or pause counter, logic inverter

Mechanical Data

Measurements WxHxD or Dia x D	Ø20 x 60
Material	PBT/PA 6.6
Weight	15g
Protection class per IEC 60529	IP67
Mounting	plugged

Electrical Data

Supply voltage	10...30 DC
----------------	------------



Datasheet number::

Definitions see general catalog.
If not otherwise noted, ratings according to
IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH
Schurwaldstrasse 9
73765 Neuhausen a.d.F.
Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 04/2007

BALLUFF
sensors worldwide