


## Accessories: Signal adapter BOS S-M01

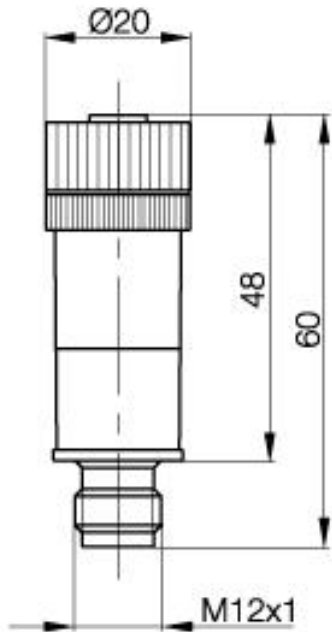

PX1583a

### Common Data


Version	Signal adapter
Usable with	Programmable Frequency control, PNP

### Mechanical Data

Measurements WxHxD or Dia x D	Ø20 x 60
Material	PBT/PA 6.6
Weight	15g
Protection class per IEC 60529	IP67
Mounting	plugged

### Electrical Data

Supply voltage	10...30 DC
----------------	------------



Datasheet number::

Definitions see general catalog.  
If not otherwise noted, ratings according to  
IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH  
Schurwaldstrasse 9  
73765 Neuhausen a.d.F.  
Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 04/2007

**BALLUFF**  
sensors worldwide