


Inductive Sensors
BES M30EG1-NSC80S-S04G-S
M30x1.5 x 66
normally-open
Sn=8mm
shielded

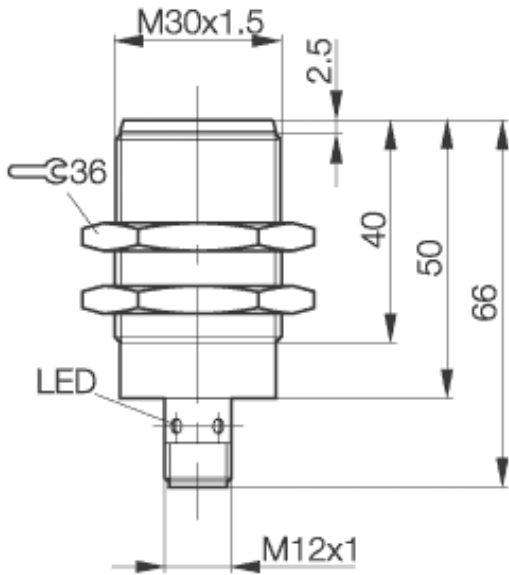

PX1912

Common Data



Mounting in steel	shielded
Rated operating distance Sn	8mm
Assured operating distance Sa	0...6.5mm
Repeatability R	≤ 2%
Hysteresis	≤ 10%
Function indication	yes
Ambient temperature range	-25...+70°C
Polution Degree	3
Time delay before availability	≤ 20ms

Mechanical Data

Measurements BxHxT or DxT	M30x1.5 x 66mm
Housing material	stainless steel
Material of sensing face	stainless steel
Degree of protection	IP67IP
Connection	Connector S4 (M12)
Shock: Halfsinus, 30 gn, 11ms	
Vibration: 55 Hz, 1mm Amplitude, 3 x 30 Minutes	

Electrical Data

Current type	DC
Wiring	3-Wire
switching function	normally-open
Output signal	NPN
Rated operational voltage	24 DCV
Rated operational current	100mA
Supply voltage	10...30 DCV
Ripple	≤ 15%
Rated supply frequency	DCHz
max. switching frequency	15Hz
No-load supply current	≤ 10/≤ 10mA
Off-state current	≤ 10µA
Voltage drop	≤ 2V
Short circuit protection	yes
Protected against polarity reversal	yes



Remarks

Damping: Ferrous



Utilization categories
 Insulation class

DC 13

Datasheet number:

Definitions see general catalog.
 If not otherwise noted, ratings according to
 IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH
 Schurwaldstrasse 9
 73765 Neuhausen a.d.F.
 Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 04/2007

